


| COMPONENTS | IMPEDANCE |
|---------------|-----------|
| MINI SMB PLUG | 75 OHM |
| MINI SMB PLUG | 75 OHM |
| PE-B159 | 75 OHM |
| | |

| Part Configurator | |
|--------------------------------------|-------------------------|
| 1. Replace ZZ with color codes. | |
| 2. Replace XX with length in inches. | |
| Standard Lengths | |
| -12 | 12" |
| -24 | 24" |
| -36 | 36" |
| -48 | 48" |
| -60 | 60" |
| -XXX | Custom Length in inches |
| | |



| Color Codes | |
|-------------|--------|
| BK | Black |
| BL | Blue |
| GR | Green |
| RD | Red |
| WH | White |
| YW | Yellow |
| | |

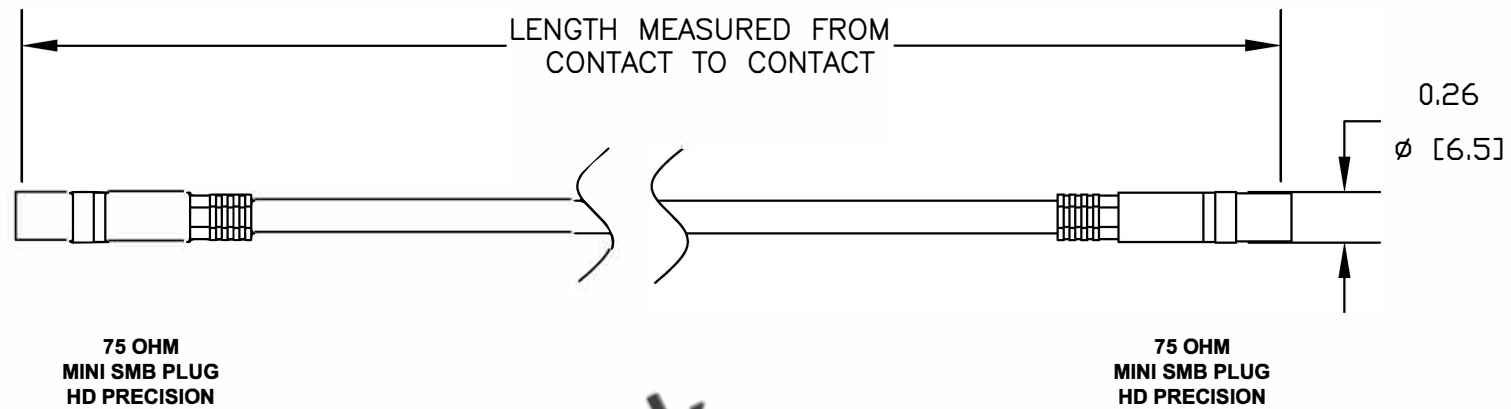


8TH FLOOR, BUILDING 1, YONGFU SCIENCE AND TECHNOLOGY CENTER INDUSTRIAL PARK, NANZHA DISTRICT 5, HUMEN, 523900, DONGGUAN, GUANGDONG, CHINA
 WEBSITE: www.ebeestock.com
 EMAIL: sales@ebeestock.com
COAXIAL & FIBER OPTICS

| | | | | | |
|----------------|----------------|---|-----------|--------|------|
| ET25419 | | DES. CABLE ASSEMBLY, PE-B159, 75 OHM HD PRECISION, MINI SMB PLUG TO MINI SMB PLUG | | | |
| REV. B | FSCM NO. 53919 | CAD FILE 082411 | SCALE N/A | SIZE A | 2231 |

- NOTES:**
- UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 - ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 - DIMENSIONS ARE IN INCHES [mm].
 - LENGTH TOLERANCE IS $\pm 1.5\%$ OR $3/8"$, WHICHEVER IS GREATER.