



| COMPONENTS | IMPEDANCE |
|---------------------------|-----------|
| MINI SMB PLUG RIGHT ANGLE | 75 OHM |
| MINI SMB PLUG | 75 OHM |
| PE-B159 | 75 OHM |
| | |

| Part Configurator | |
|--------------------------------------|-------------------------|
| 1. Replace ZZ with color codes. | |
| 2. Replace XX with length in inches. | |
| Standard Lengths | |
| -12 | 12" |
| -24 | 24" |
| -36 | 36" |
| -48 | 48" |
| -60 | 60" |
| -XXX | Custom Length in inches |
| | |

| Color Codes | |
|-------------|--------|
| BK | Black |
| BL | Blue |
| GR | Green |
| RD | Red |
| WH | White |
| YW | Yellow |
| | |

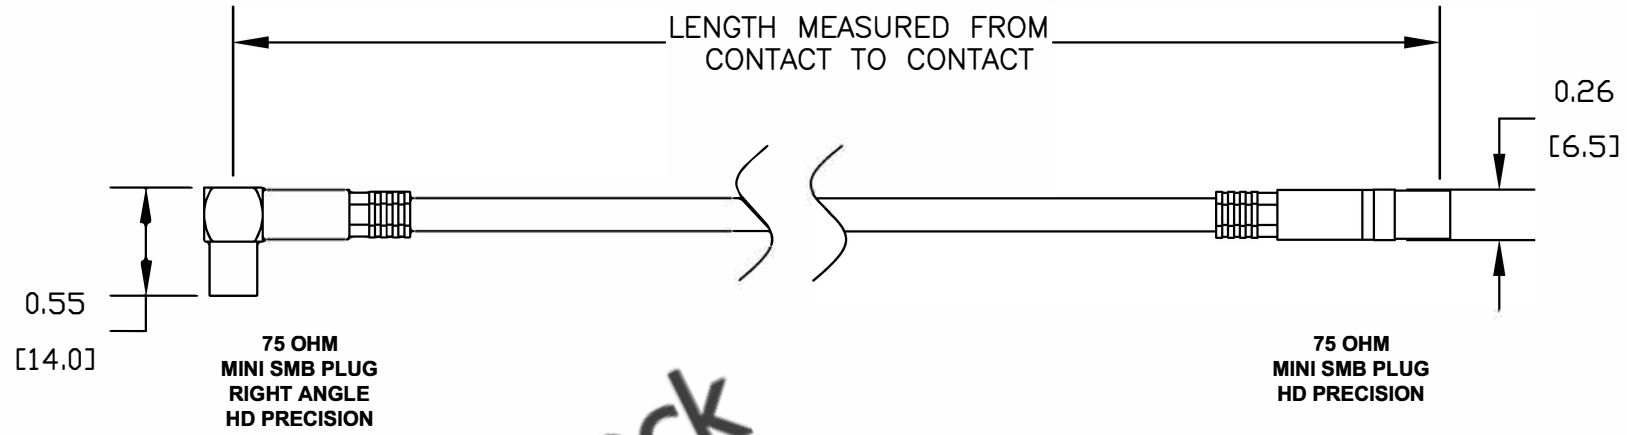

| | | | | | |
|---|----------------|-----------------|---|--------|------|
|  8TH FLOOR, BUILDING 1, YONGFU SCIENCE AND TECHNOLOGY CENTER INDUSTRIAL PARK, NANZHA DISTRICT 5, HUMEN, 523900, DONGGUAN, GUANGDONG, CHINA WEBSITE: www.ebeestock.com EMAIL: sales@ebeestock.com COAXIAL & FIBER OPTICS | | | | | |
| ET25451 | | | DES. CABLE ASSEMBLY, PE-B159, 75 OHM HD PRECISION, MINI SMB PLUG RIGHT ANGLE TO MINI SMB PLUG | | |
| REV. C | FSCM NO. 53919 | CAD FILE 082411 | SCALE N/A | SIZE A | 2231 |
| NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm]. 4. LENGTH TOLERANCE IS ± 1.5% OR 3/8", WHICHEVER IS GREATER. | | | | | |