

Snap-On MMBX Plug to Snap-On MMBX Plug Cable 8 Inch Length U sing ET38399 Coax



RF Cable Assemblies Technical Data Sheet

ET25958

Configuration


Connector 1: Snap-On MMBX Plug
Connector 2: Snap-On MMBX Plug

Cable Type: ET38399

Features

• Max. Operating Frequency of 3 GHz

Snap-On mating

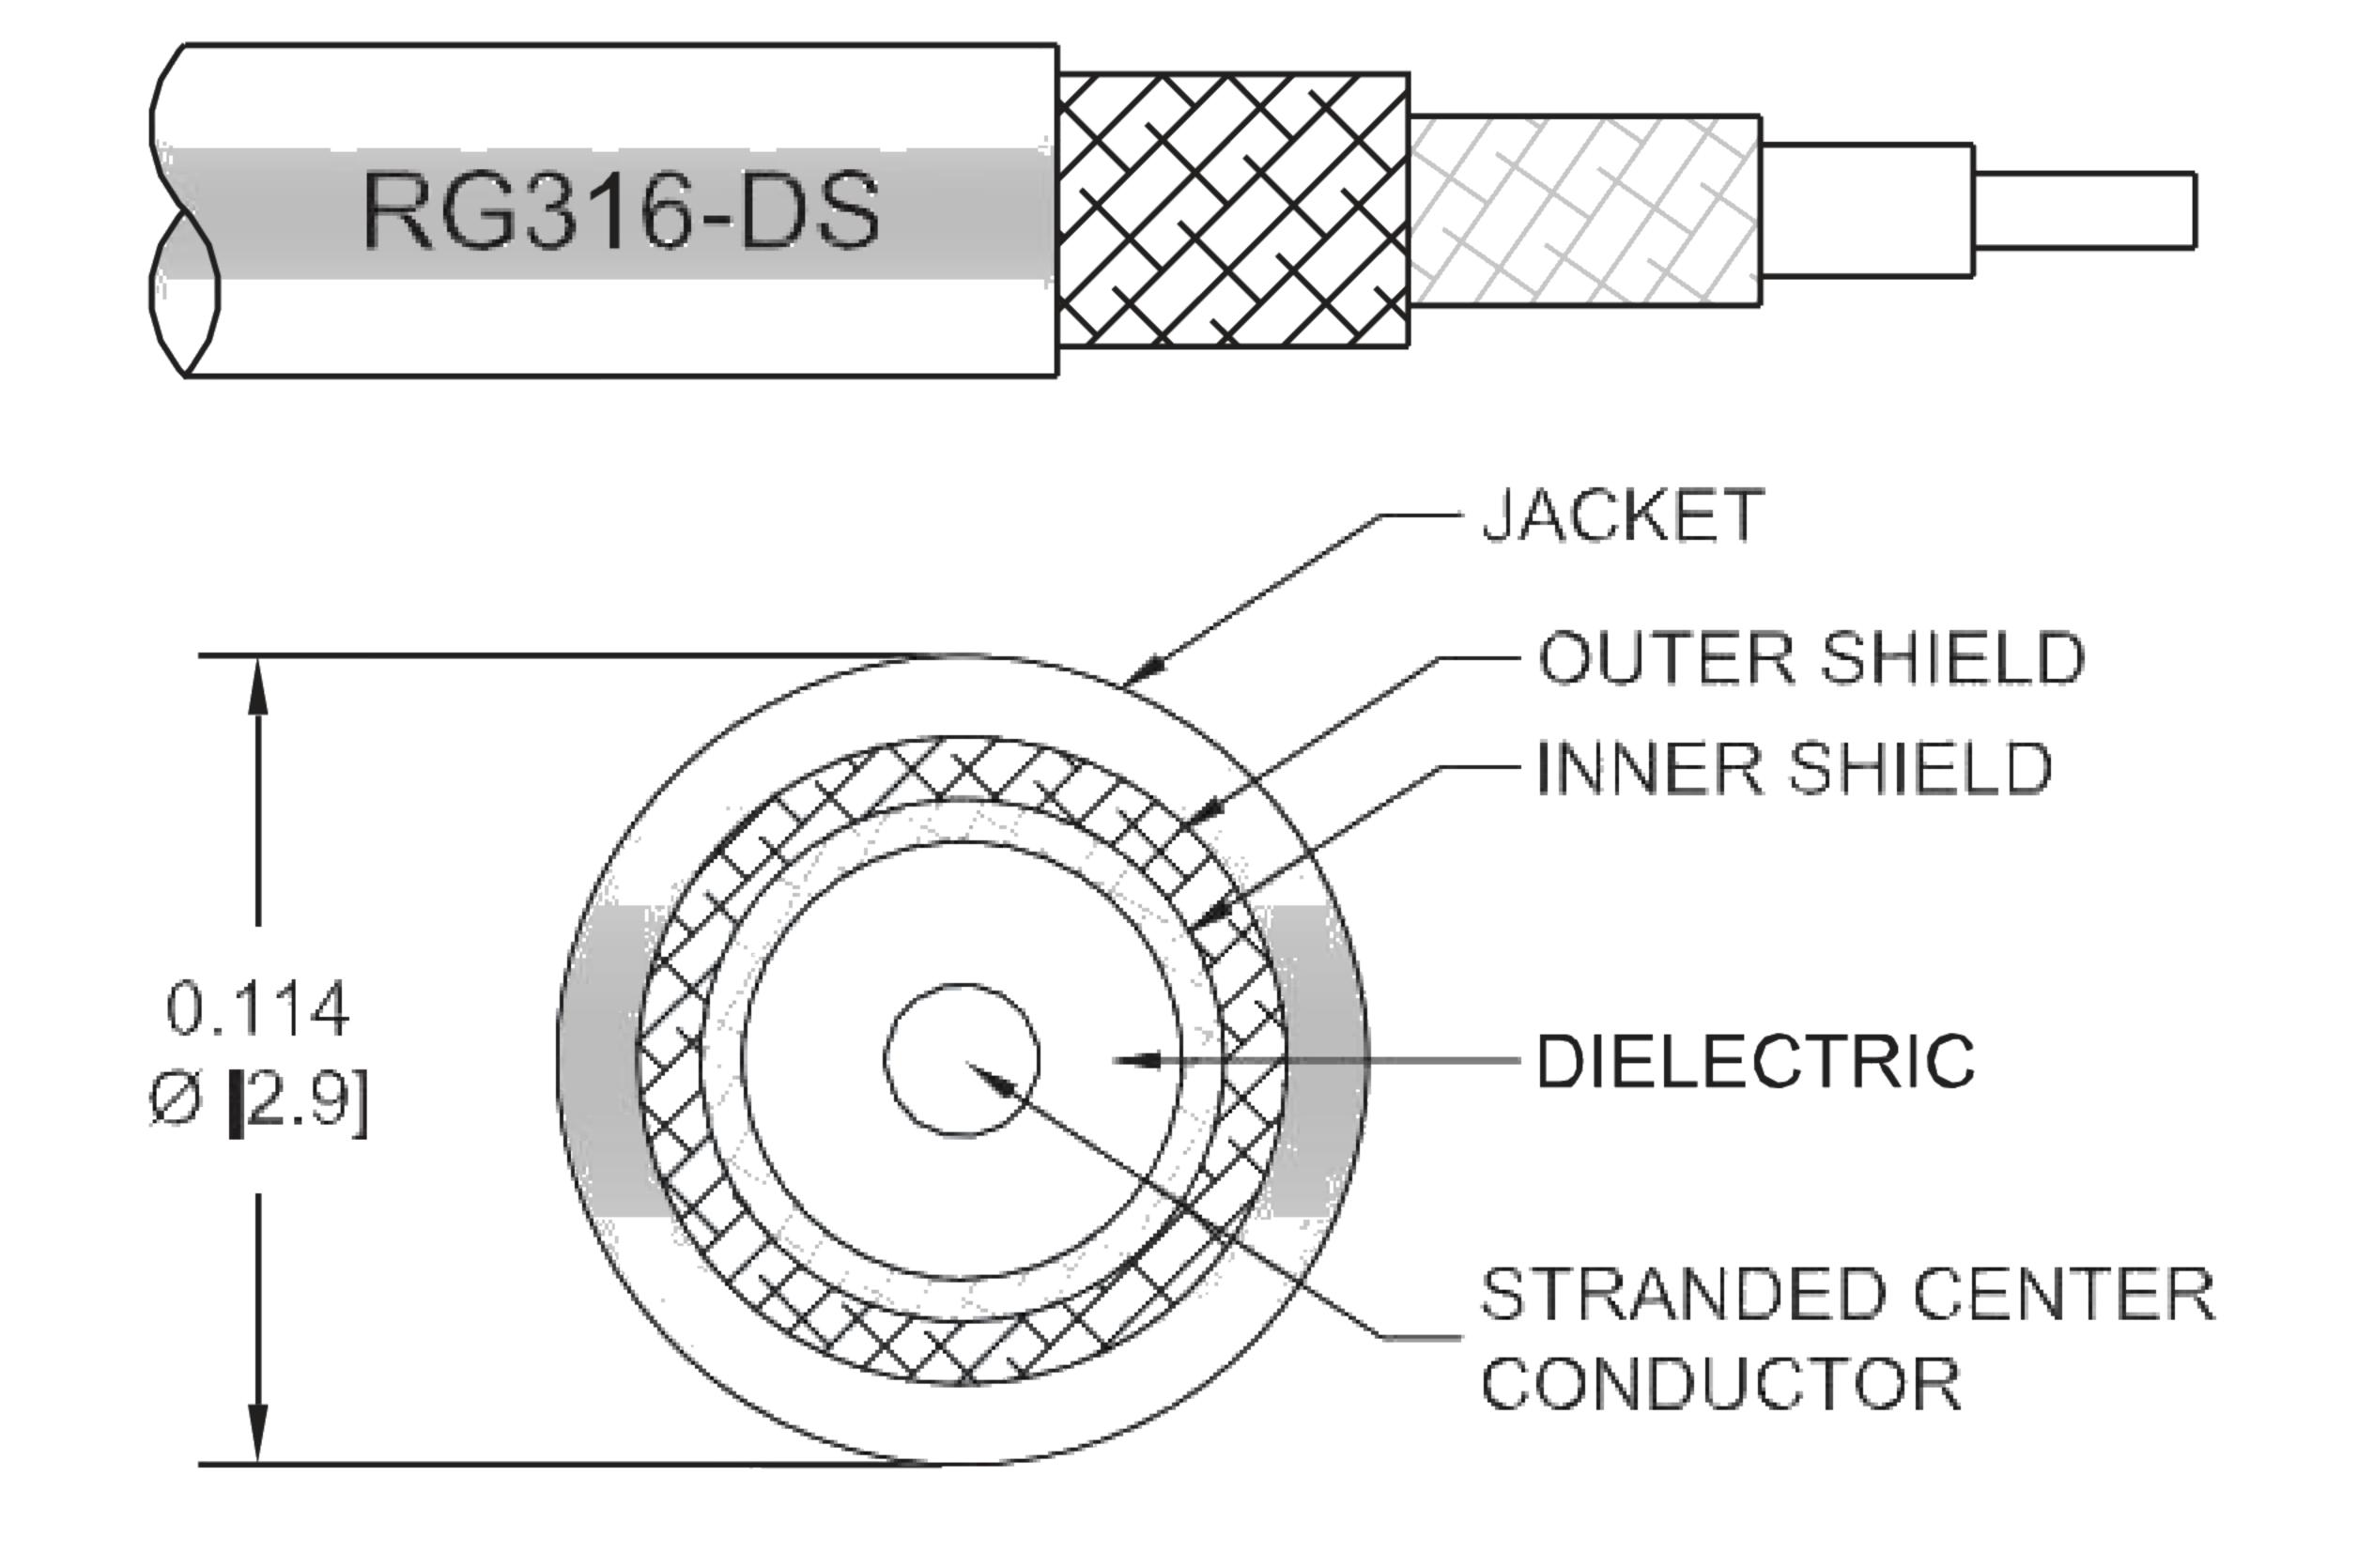

Applications

- General Purpose Test
- PCB Probing

- PCB Testing
- PCB-to-Panel

Description

Ebeestock's MMBX cable assemblies are part of our full line of RF components available for same-day shipping. These MMBX cable assemblies are designed to connect MMBX system components or test connections, delivering signal frequencies as high as 3 GHz. Our family of MMBX cables can also be used to connect from PCB to panel, offering between series MMBX options with SMA Bulkhead, TNC Bulkhead and N Bulkhead assembly configurations. If none of our standard options fit your application, you can specify your own custom MMBX cable assembly using Ebeestock's online Cable Creator.

Our MMBX cable assembly datasheet specifications and drawing with dimensions are shown below in this PDF. Ebeestock's broad catalog of RF, microwave and millimeter wave cable assemblies allow designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Ebeestock has the right cable assemblies for the job. Ebeestock can also expertly build your custom cable assemblies for you and ship same day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.4:1	
Return Loss		-15.56		dB
Insertion Loss			0.52	dB
Velocity of Propagation		70		%
Capacitance		29.4 [96.46]		pF/ft [pF/m]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Snap-On MMBX Plug to Snap-On MMBX Plug Cable 8 Inch Length Using ET38399 Coax ET25958



Snap-On MMBX Plug to Snap-On MMBX Plug Cable 8 Inch Length U sing ET38399 Coax



RF Cable Assemblies Technical Data Sheet

ET25958

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	3	GHz
Insertion Loss (Max.)	0.26	0.29	0.33	0.38	0.52	dB

Mechanical Specifications

Cable Assembly

Length* 8 in [203.2 mm]
Diameter 0.185 in [4.7 mm]

Cable

Cable Type
Impedance
Inner Conductor Type

ET38399

50 Ohms
Stranded

Inner Conductor Material and Plating Copper Clad Steel, Silver

Dielectric Type
Number of Shields
2

Shield Layer 1
Silver Plated Copper Braid
Silver Plated Copper Braid

Jacket Material FEP, Tan

Connectors

Jacket Diameter

Repeated Minimum Bend Radius

Description	Connector 1	Connector 2 MMBX Plug	
Type	MMBX Plug		
Impedance	50 Ohms	50 Ohms	
Connection Method	Snap-On	Snap-On	
Mating Cycles	100	100	
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold	
Dielectric Type	PTFE	PTFE	
Outer Conductor Material and Plating	Brass, Gold	Brass, Gold	
Body Material and Plating	Brass, Gold	Brass, Gold	

0.114 in [2.9 mm]

0.6 in [15.24 mm]

Mechanical Specification Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Snap-On MMBX Plug to Snap-On MMBX Plug Cable 8 Inch Length Using ET38399 Coax ET25958

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



Snap-On MMBX Plug to Snap-On MMBX Plug Cable 8 Inch Length U sing ET38399 Coax



RF Cable Assemblies Technical Data Sheet

ET25958

*All cable assemblies have a length tolerance of 1.5% or ± 3/8", whichever is greater.

Environmental Specifications

Temperature

Operating Range

-55 to +155 deg C


Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

How to Order

Part Number Configuration:

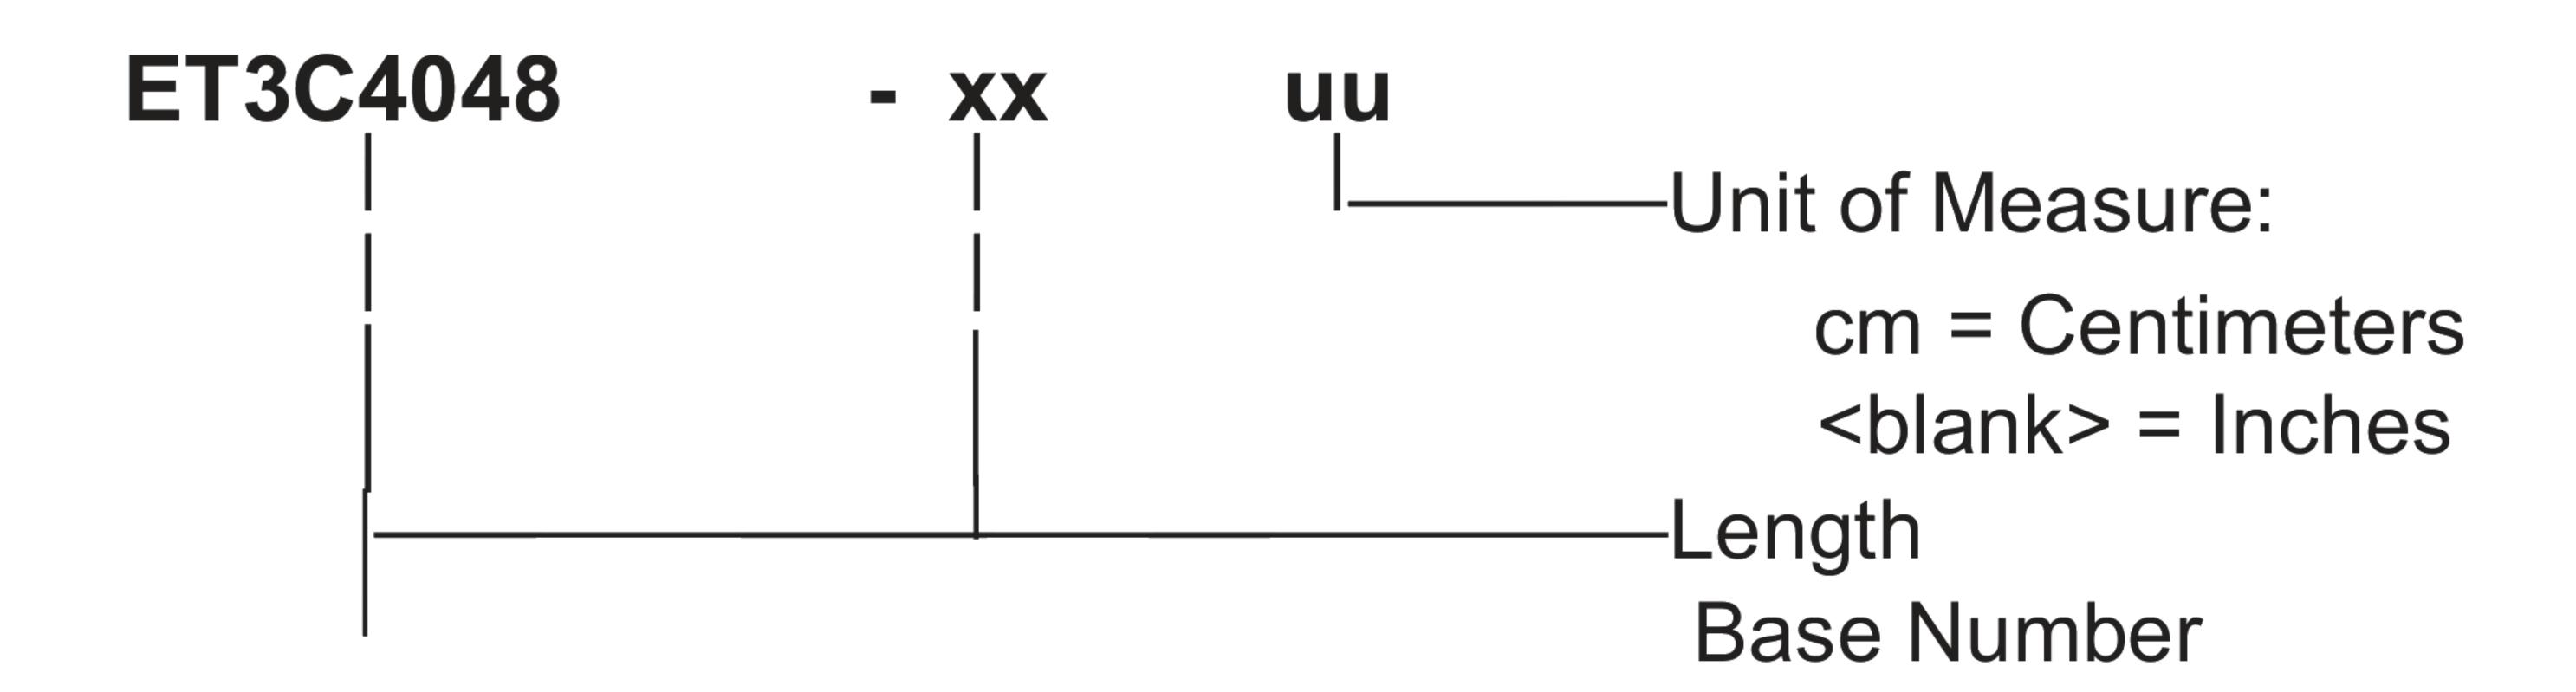

Example: ET3C4048-12 = 12 inches long cable

ET3C4048-100cm = 100 cm long cable

Snap-On MMBX Plug to Snap-On MMBX Plug Cable 8 Inch Length Using ET38399 Coax from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Snap-On MMBX Plug to Snap-On MMBX Plug Cable 8 Inch Length Using ET38399 Coax ET25958

URL: https://www.ebeestock.com/snap-on-mmbx-plug-to-snap-on-mmbx-plug-cable-4-inch-length-using -rg316-ds-coax-0025956

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

