

Snap-On MMBX Plug to SMA Male Right Angle Cable 8 Inch Lengt h Using ET38399 Coax



## RF Cable Assemblies Technical Data Sheet

ET26024


# Configuration

Connector 1: Snap-On MMBX Plug
Connector 2: SMA Male Right Angle

Cable Type: ET38399

## Features

- Max. Operating Frequency of 3 GHz
- Snap-On mating
- Low Profile Right Angle Configurations
- SMA Bulkhead, N Bulkhead and TNC Bulkhead Between-Series Configurations

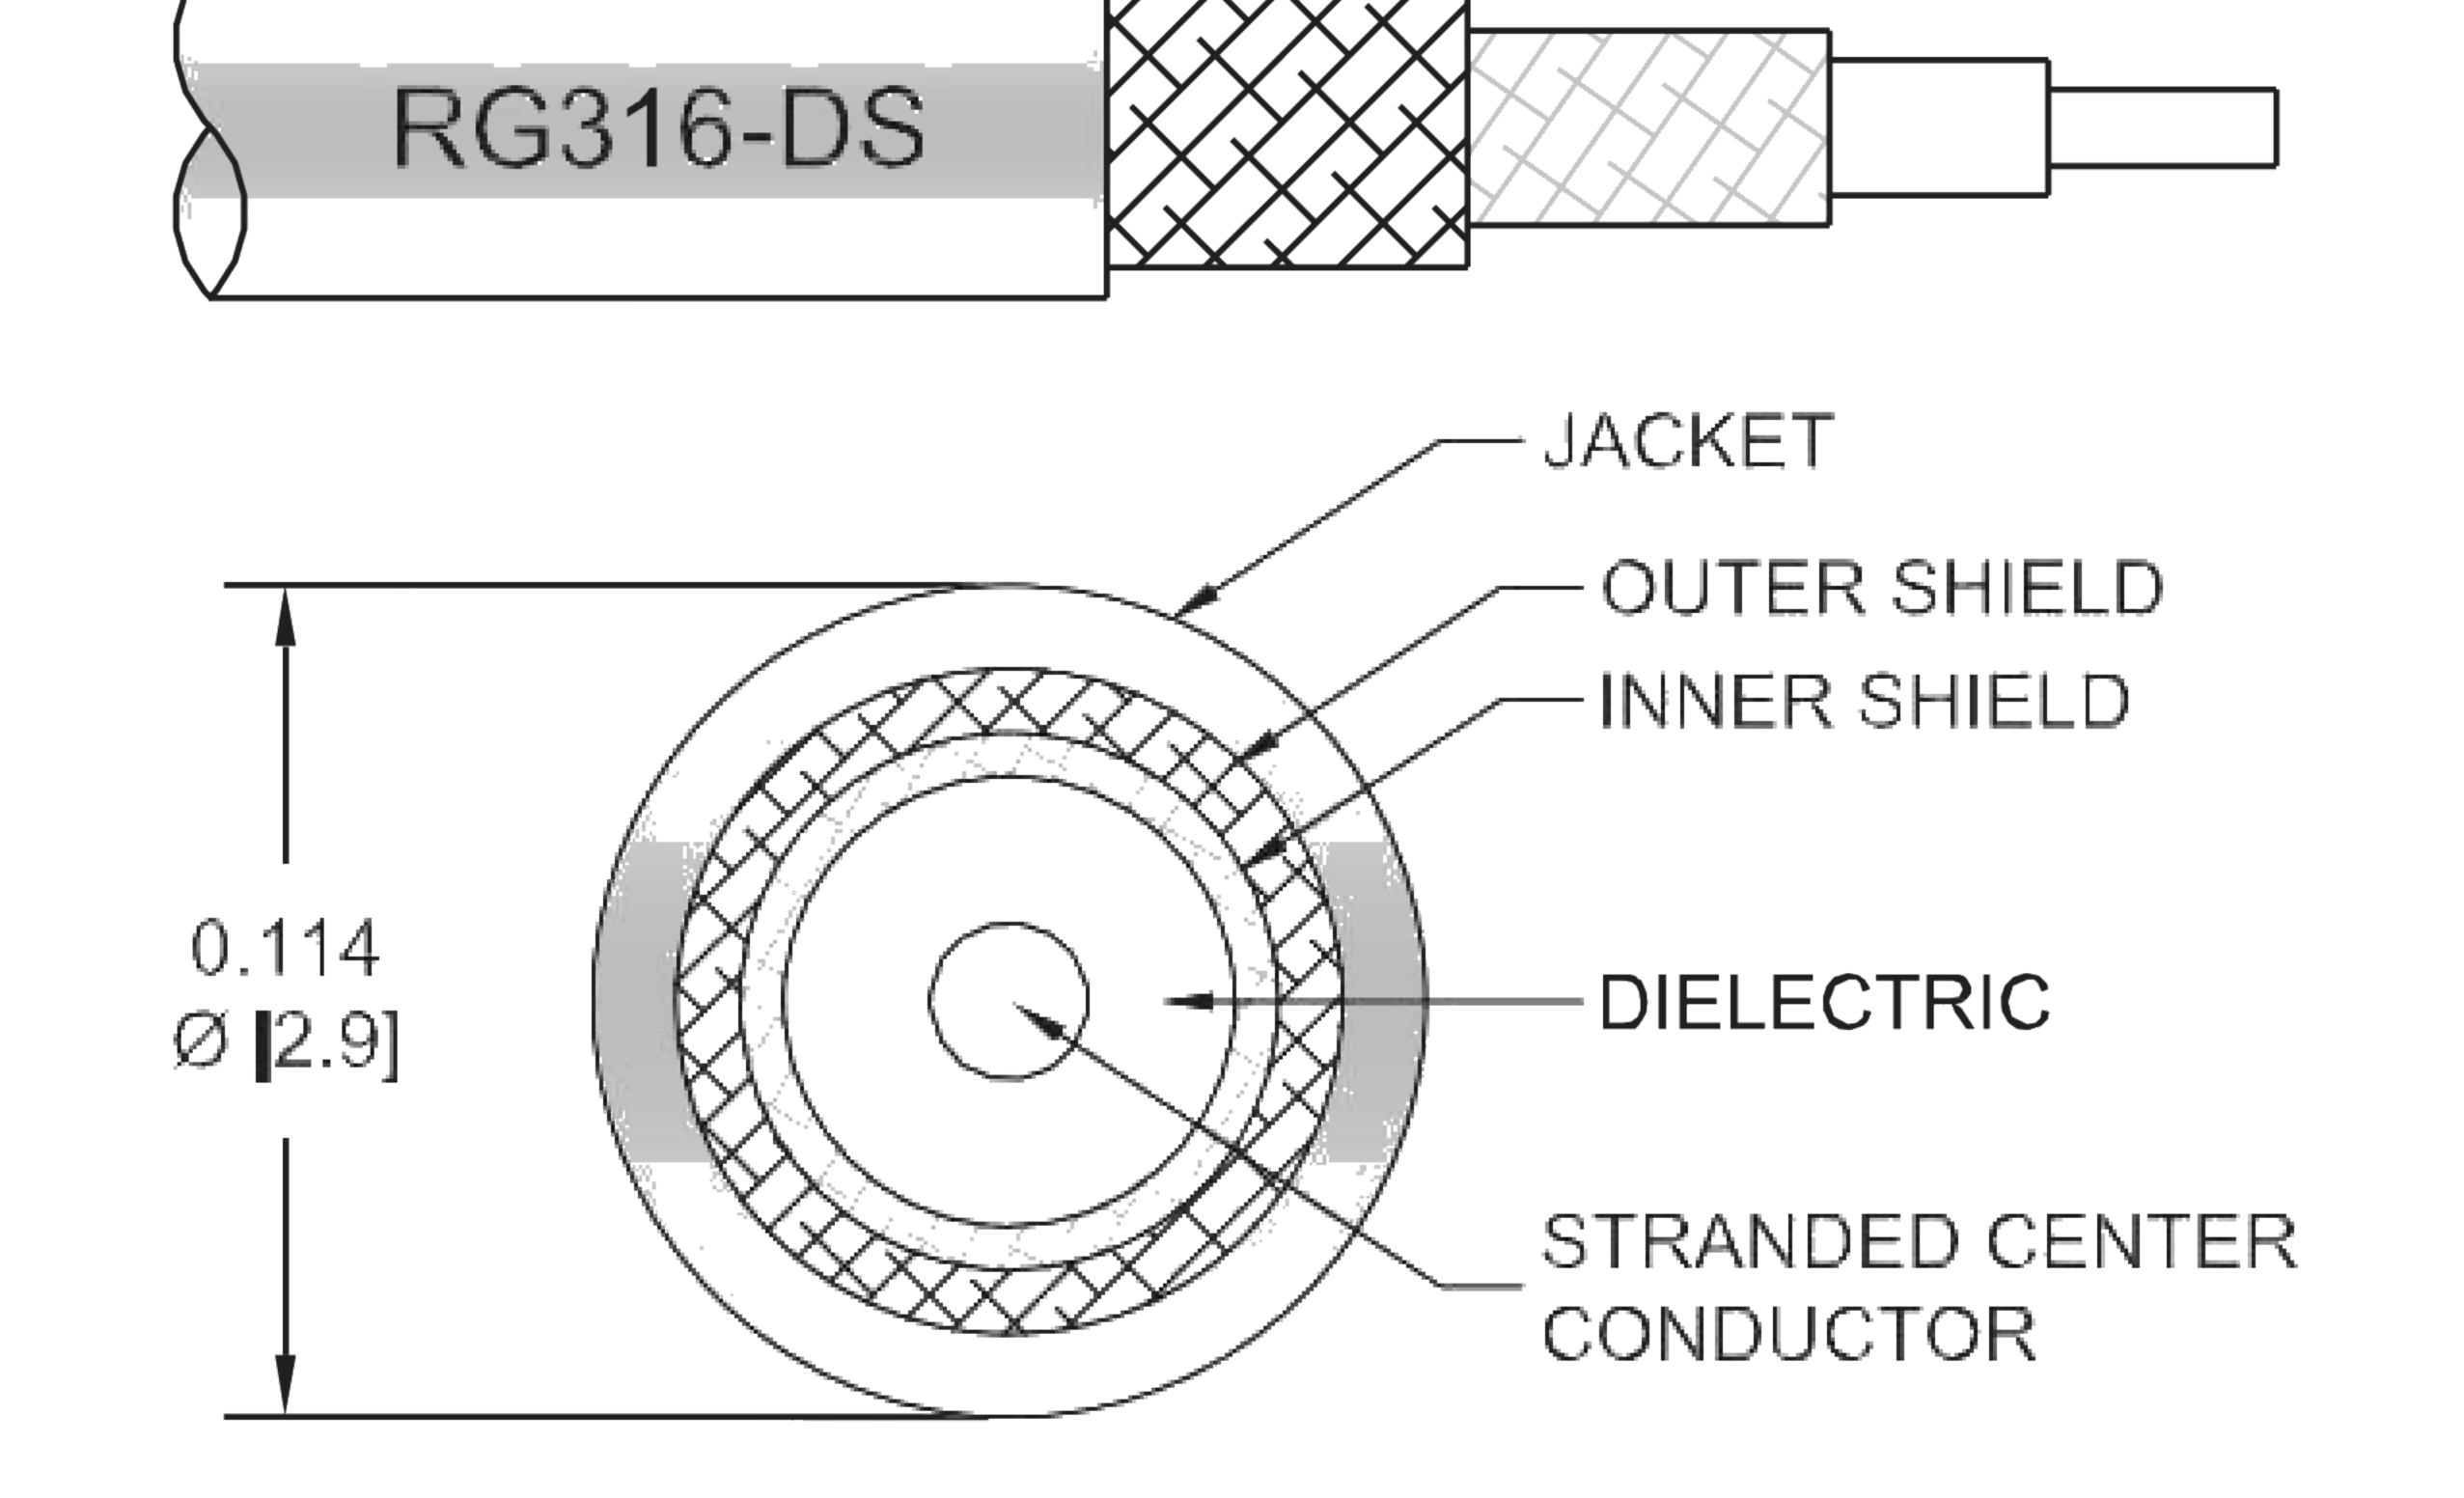

# Applications

- General Purpose Test
- PCB Probing

- PCB Testing
- PCB-to-Panel

## Description

Ebeestock's MMBX cable assemblies are part of our full line of RF components available for same-day shipping. These MMBX cable assemblies are designed to connect MMBX system components or test connections, delivering signal frequencies as high as 3 GHz. Our family of MMBX cables can also be used to connect from PCB to panel, offering between series MMBX options with SMA Bulkhead, TNC Bulkhead and N Bulkhead assembly configurations. If none of our standard options fit your application, you can specify your own custom MMBX cable assembly using Ebeestock's online Cable Creator.

Our MMBX cable assembly datasheet specifications and drawing with dimensions are shown below in this PDF. Ebeestock's broad catalog of RF, microwave and millimeter wave cable assemblies allow designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Ebeestock has the right cable assemblies for the job. Ebeestock can also expertly build your custom cable assemblies for you and ship same day.

### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.4:1	
Return Loss		-15.56		dB
Insertion Loss			0.52	dB
Velocity of Propagation		70		%
Capacitance		29.4 [96.46]		pF/ft [pF/m]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Snap-On MMBX Plug to SMA Male Right Angle Cable 8 Inch Length Using ET38399 Coax ET26024



Snap-On MMBX Plug to SMA Male Right Angle Cable 8 Inch Lengt h Using ET38399 Coax



# RF Cable Assemblies Technical Data Sheet

ET26024

## Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	3	GHz
Insertion Loss (Max.)	0.26	0.29	0.33	0.38	0.52	dB

# Mechanical Specifications

## Cable Assembly

Jacket Diameter

Length\*

8 in [203.2 mm]

Diameter

0.315 in [8 mm]

#### Cable

Cable Type
Impedance
Inner Conductor Type

ET38399
50 Ohms
Stranded

Inner Conductor Material and Plating Copper Clad Steel, Silver

Dielectric Type
Number of Shields

PTFE
2

Shield Layer 1
Silver Plated Copper Braid
Silver Plated Copper Braid
Silver Plated Copper Braid

Jacket Material FEP, Tan

Repeated Minimum Bend Radius 0.6 in [15.24 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Snap-On MMBX Plug to SMA Male Right Angle Cable 8 Inch Length Using ET38399 Coax ET26024

0.114 in [2.9 mm]



Snap-On MMBX Plug to SMA Male Right Angle Cable 8 Inch Lengt h Using ET38399 Coax



# RF Cable Assemblies Technical Data Sheet

ET26024

#### Connectors

Connector 1	Connector 2  SMA Male Right Angle	
MMBX Plug		
	MIL-STD-348A	
50 Ohms	50 Ohms	
Snap-On		
100		
Beryllium Copper, Gold	Brass, Gold	
	50 μin minimum	
PTFE	PTFE	
Brass, Gold		
Brass, Gold	Brass, Nickel	
	100 μin minimum	
	Brass, Nickel	
	100 μin minimum	
	5/16 inch	
	3 in-lbs [0.34 Nm]	
	MMBX Plug  50 Ohms  Snap-On  100  Beryllium Copper, Gold  PTFE  Brass, Gold	

Mechanical Specification Notes:

# **Environmental Specifications**

Temperature

Operating Range -55 to +155 deg C

Compliance Certifications (see product page for current document)

### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Snap-On MMBX Plug to SMA Male Right Angle Cable 8 Inch Length Using ET38399 Coax ET26024

<sup>\*</sup>All cable assemblies have a length tolerance of 1.5% or ± 3/8", whichever is greater.



Snap-On MMBX Plug to SMA Male Right Angle Cable 8 Inch Lengt h Using ET38399 Coax



# RF Cable Assemblies Technical Data Sheet

ET26024

#### How to Order

Part Number Configuration:

ET3C4060
- xx uu

Unit of Measure:

cm = Centimeters

<br/>
<br/>
<br/>
<br/>
chlank> = Inches

Base Number

Example: ET3C4060-12 = 12 inches long cable

ET3C4060-100cm = 100 cm long cable

Snap-On MMBX Plug to SMA Male Right Angle Cable 8 Inch Length Using ET38399 Coax from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Snap-On MMBX Plug to SMA Male Right Angle Cable 8 Inch Length Using ET38399 Coax ET26024

**URL:** https://www.ebeestock.com/snap-on-mmbx-plug-to-sma-male-right-angle-cable-4-inch-length-us ing-rg316-ds-coax-0026022

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

