



| COMPONENTS | IMPEDANCE |
|------------|-----------|
| MMCX PLUG  | 50 OHM    |
| MMCX PLUG  | 50 OHM    |
| RG178B/U   | 50 OHM    |
|            |           |

| Standard Lengths |                         |
|------------------|-------------------------|
| -12              | 12"                     |
| -24              | 24"                     |
| -36              | 36"                     |
| -48              | 48"                     |
| -60              | 60"                     |
| -XXX             | Custom Length in Inches |
|                  |                         |

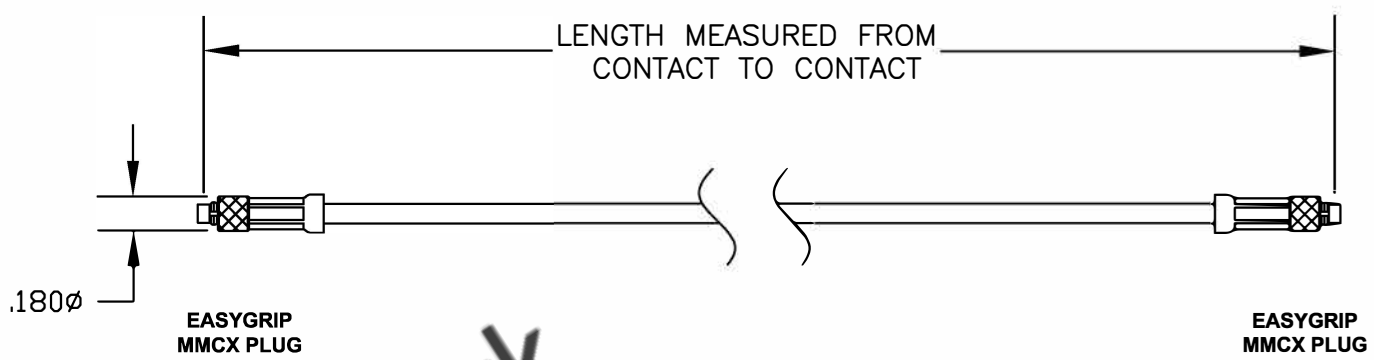

|   |   |           |        |     |
|---|---|-----------|--------|-----|
|  <p>8TH FLOOR, BUILDING 1, YONGFU SCIENCE AND TECHNOLOGY CENTER INDUSTRIAL PARK, NANZHA DISTRICT 5, HUMEN, 523900, DONGGUAN, GUANGDONG, CHINA</p> <p>WEBSITE: <a href="http://www.ebeestock.com">www.ebeestock.com</a><br/>EMAIL: <a href="mailto:sales@ebeestock.com">sales@ebeestock.com</a></p> <p>COAXIAL &amp; FIBER OPTICS</p> | <b>ET26125</b>  |           |        |     |
|   | DES. CABLE ASSEMBLY, RG178B/U, EASYGRIP MMCX PLUG TO EASYGRIP MMCX PLUG |           |        |     |
| REV. FSCMNO.53919   | CAD FILE 072209   | SCALE N/A | SIZE A | 127 |

- NOTES:
- UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
  - ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
  - DIMENSIONS ARE IN INCHES.
  - LENGTH TOLERANCE IS  $\pm 1.5\%$  OR  $3/8"$ , WHICHEVER IS GREATER.