

MMCX Plug to MMCX Plug Low Loss Cable Using ET-LMR-100 Coax In 150 CM Length



# RF Cable Assemblies Technical Data Sheet


ET26262

# Configuration

Connector 1: MMCX Plug
Connector 2: MMCX Plug
Cable Type: ET-LMR-100A

# Features

- Max Frequency 5.8 GHz
- Shielding Effectivity > 90 dB
- 66% Phase Velocity
- Double Shielded
- PVC Jacket

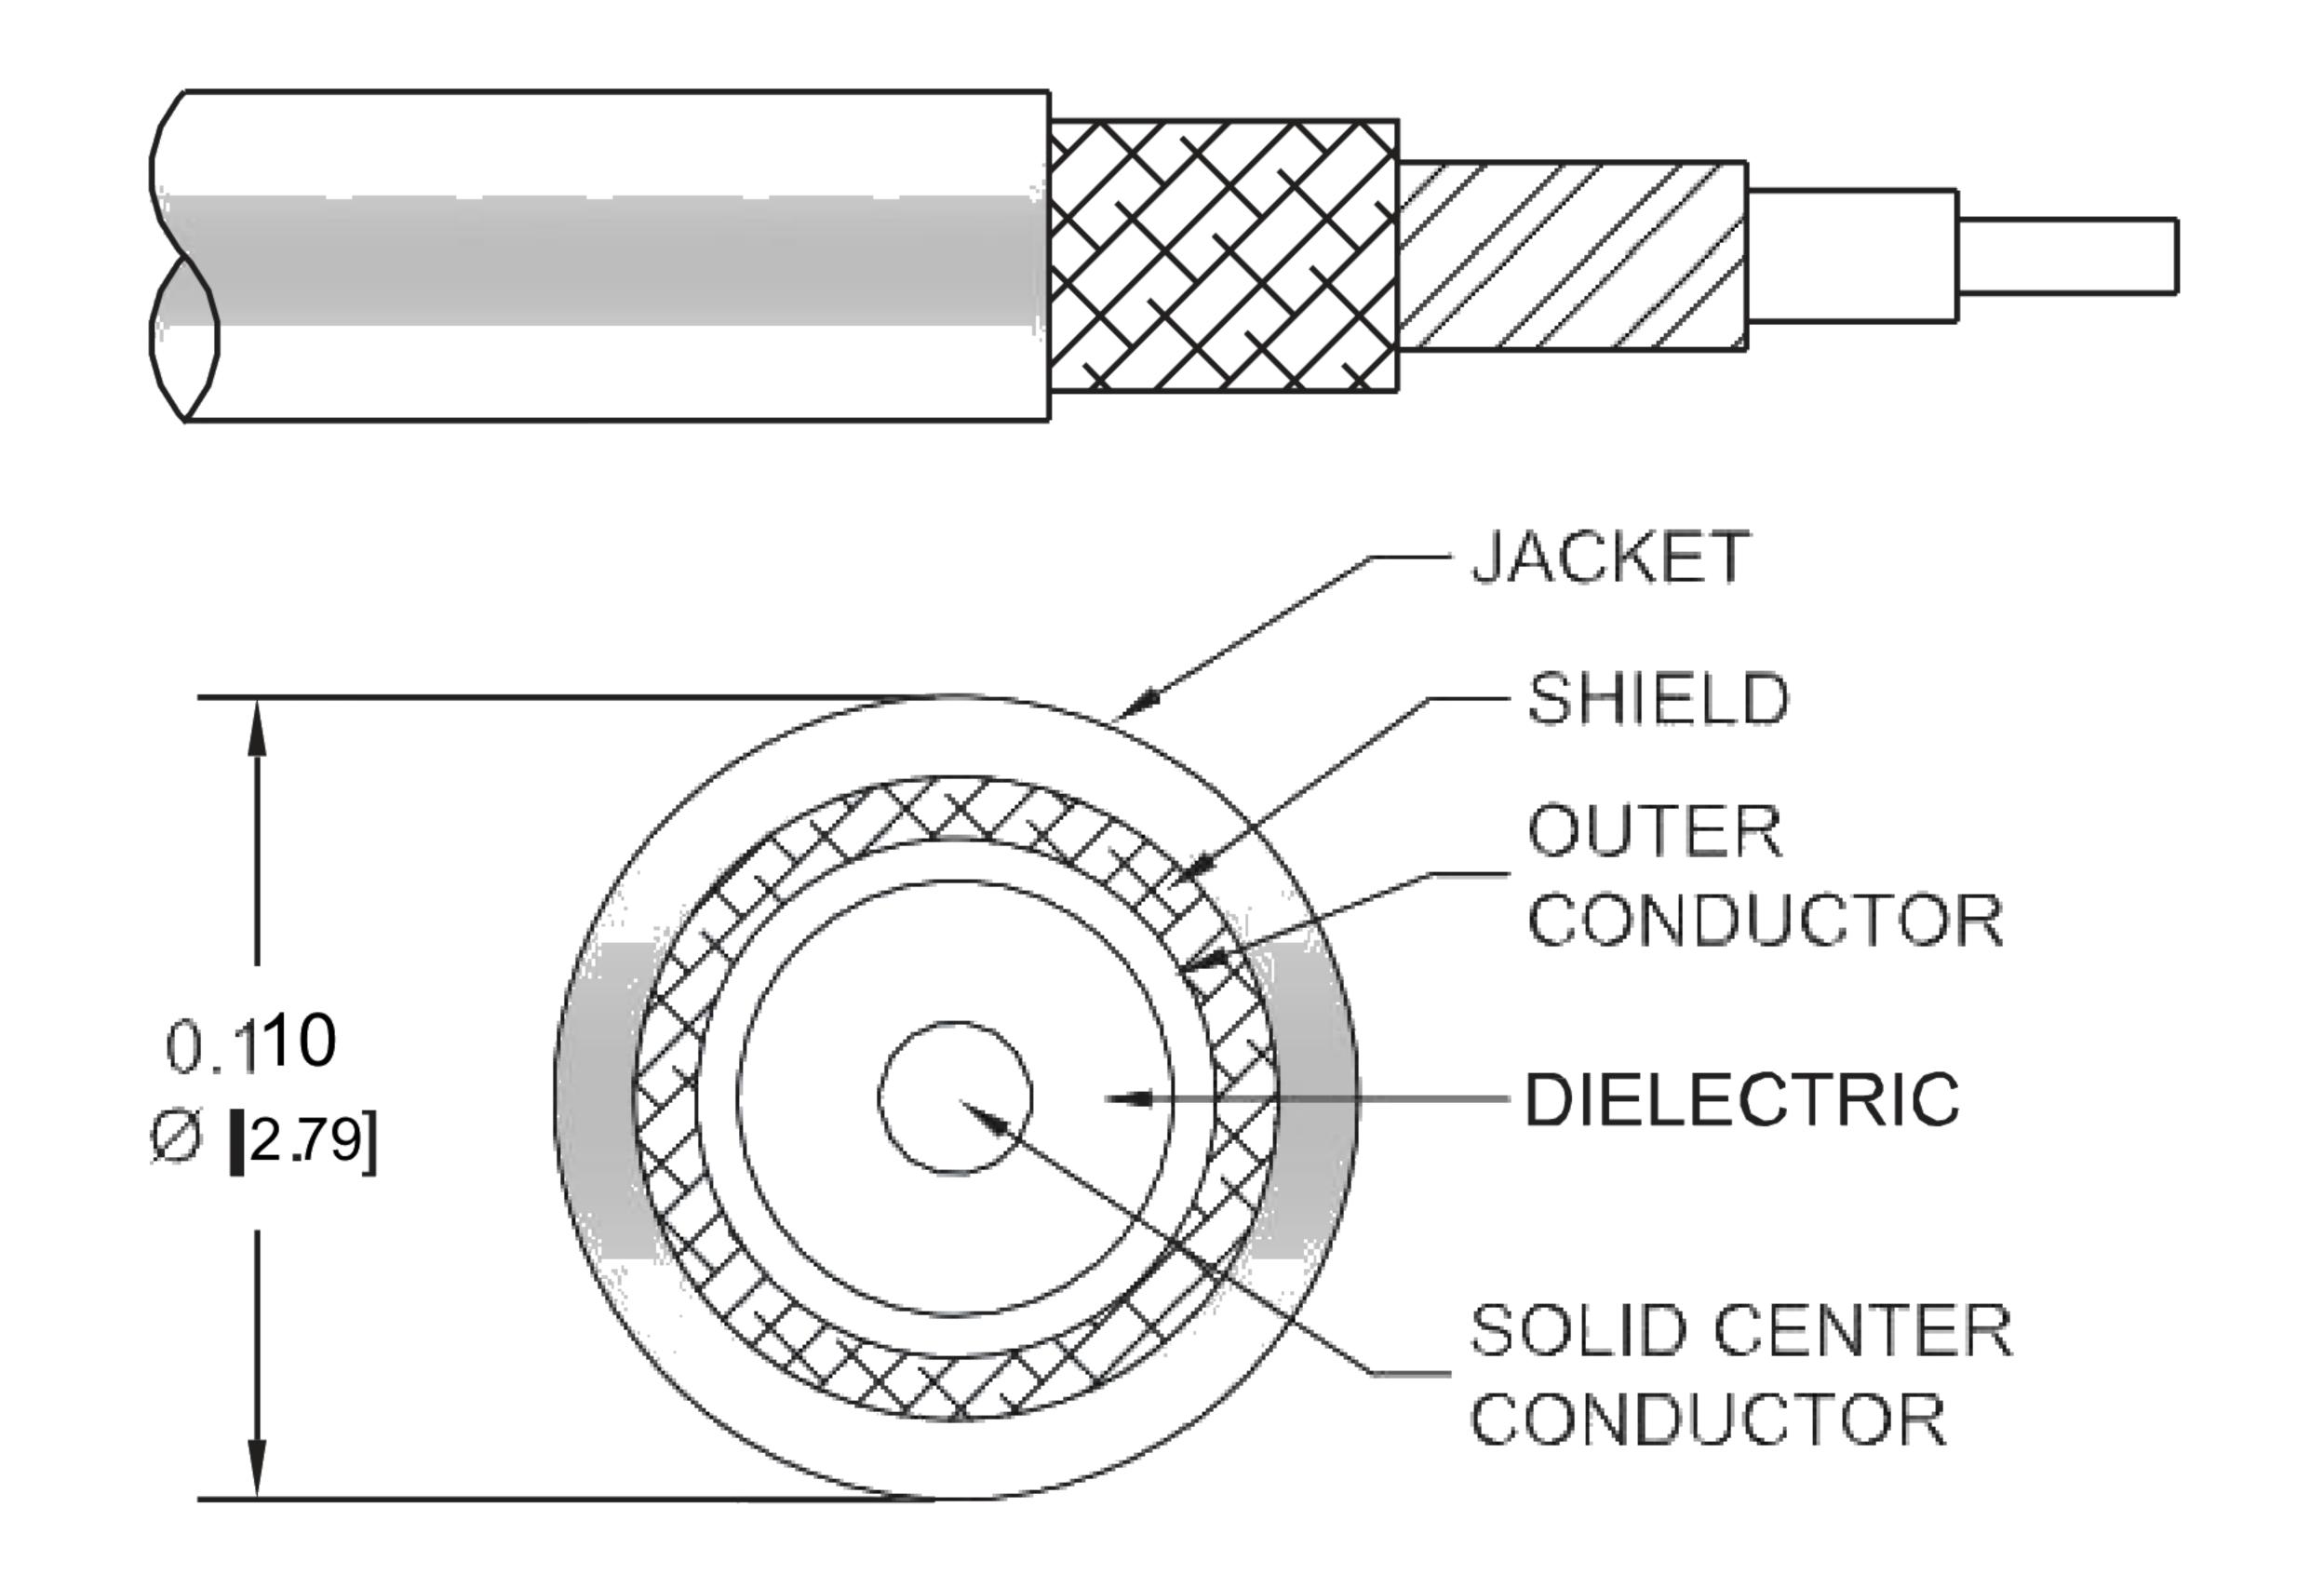

# Applications

General Purpose

Laboratory Use

### Description

Ebeestock's ET26262 MMCX plug to MMCX plug 150 cm cable using ET-LMR-100 coax is part of our full line of RF components available for same-day shipping. Ebeestock's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Ebeestock MMCX to MMCX cable assembly has a plug to plug gender configuration with 50 ohm flexible ET-LMR-100A coax. The ET26262 MMCX plug to MMCX plug cable assembly operates to 5.8 GHz. The double shielding of this Ebeestock cable assembly provides excellent shielding effectiveness of better than 90dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: MMCX Plug to MMCX Plug Low Loss Cable Using ET-LMR-100 Coax In 150 CM Length ET26262

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



MMCX Plug to MMCX Plug Low Loss Cable Using ET-LMR-100 Coax In 150 CM Length



# RF Cable Assemblies Technical Data Sheet

ET26262

## Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		5.8	GHz
VSWR			1.4:1	
Velocity of Propagation		66		%
RF Shielding	90			dB
Group Delay		1.54 [5.05]		ns/ft [ns/m]
Capacitance		30.8 [101.05]		pF/ft [pF/m]
Inductance		0.077 [0.25]		uH/ft [uH/m]
DC Resistance Inner Conductor		81 [265.75]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		9.5 [31.17]		Ω/1000ft [Ω/Km]
Jacket Spark			2,000	Vrms

## Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	5.8	GHz
Insertion Loss (Typ.)	0.67	0.96	1.39	2.28	3.64	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1\*SQRT(FGHz) dB per connector.

### Mechanical Specifications

#### Cable Assembly

Length\* 59.06 in [150.01 cm] Weight 0.064 lbs [29.03 g]

## Cable

Cable Type ET-LMR-100A Impedance 50 Ohms Inner Conductor Type Solid

Inner Conductor Material and Plating Copper Clad Steel

PE Dielectric Type Number of Shields

Aluminum Tape Shield Layer 1 Shield Layer 2 Tinned Copper Braid Jacket Material PVC, Black Jacket Diameter 0.11 in [2.79 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: MMCX Plug to MMCX Plug Low Loss Cable Using ET-LMR-100 Coax In 150 CM Length ET26262

www.ebeestock.com

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen, 523900, Dongguan, Guangdong, China.



MMCX Plug to MMCX Plug Low Loss Cable Using ET-LMR-100 Coax In 150 CM Length



## RF Cable Assemblies Technical Data Sheet

ET26262

One Time Minimum Bend Radius Repeated Minimum Bend Radius Bending Moment Flat Plate Crush Tensile Strength 0.25 in [6.35 mm]
1 in [25.4 mm]
0.1 lbs-ft [0.14 N-m]
10 lbs/in [0.18 Kg/mm]
15 lbs [6.8 Kg]

#### Connectors

Description	Connector 1	Connector 2	
Туре	MMCX Plug	MMCX Plug	
Specification	BS EN 122340	BS EN 122340	
Impedance	50 Ohms	50 Ohms	
Contact Material and Plating	Brass, Gold	Brass, Gold	
Contact Plating Specification	30 µin minimum	30 µin minimum	
Dielectric Type	PTFE	PTFE	
Body Material and Plating	Brass, Gold	Brass, Gold	
Body Plating Specification	3 µin minimum	3 µin minimum	

## **Environmental Specifications**

Temperature

Operating Range

-40 to +85 deg C

Compliance Certifications (see product page for current document)

### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: MMCX Plug to MMCX Plug Low Loss Cable Using ET-LMR-100 Coax In 150 CM Length ET26262

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



MMCX Plug to MMCX Plug Low Loss Cable Using ET-LMR-100 Coax In 150 CM Length



# RF Cable Assemblies Technical Data Sheet

ET26262

#### How to Order

Part Number Configuration:

ET3C3661
- xx uu

Unit of Measure:

cm = Centimeters

<br/>
<br/>
<br/>
<br/>
chlank> = Inches

Base Number

Example: ET3C3661-12 = 12 inches long cable

ET3C3661-100cm = 100 cm long cable

MMCX Plug to MMCX Plug Low Loss Cable Using ET-LMR-100 Coax In 150 CM Length from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: MMCX Plug to MMCX Plug Low Loss Cable Using ET-LMR-100 Coax In 150 CM Length ET26262

**URL:** https://www.ebeestock.com/mmcx-plug-to-mmcx-plug-low-loss-cable-using-lmr-100-coax-in-12-

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.

