

MMCX Plug Right Angle to SMA Female Bulkhead Cable 60 Inch L ength Using ET38398 Coax with HeatShrink



## RF Cable Assemblies Technical Data Sheet

ET26268


# Configuration

Connector 1: MMCX Plug Right Angle
Connector 2: SMA Female Bulkhead

Cable Type: ET38398

## Features

- Max Frequency 6 GHz
- Double Shielded
- PTFE Jacket

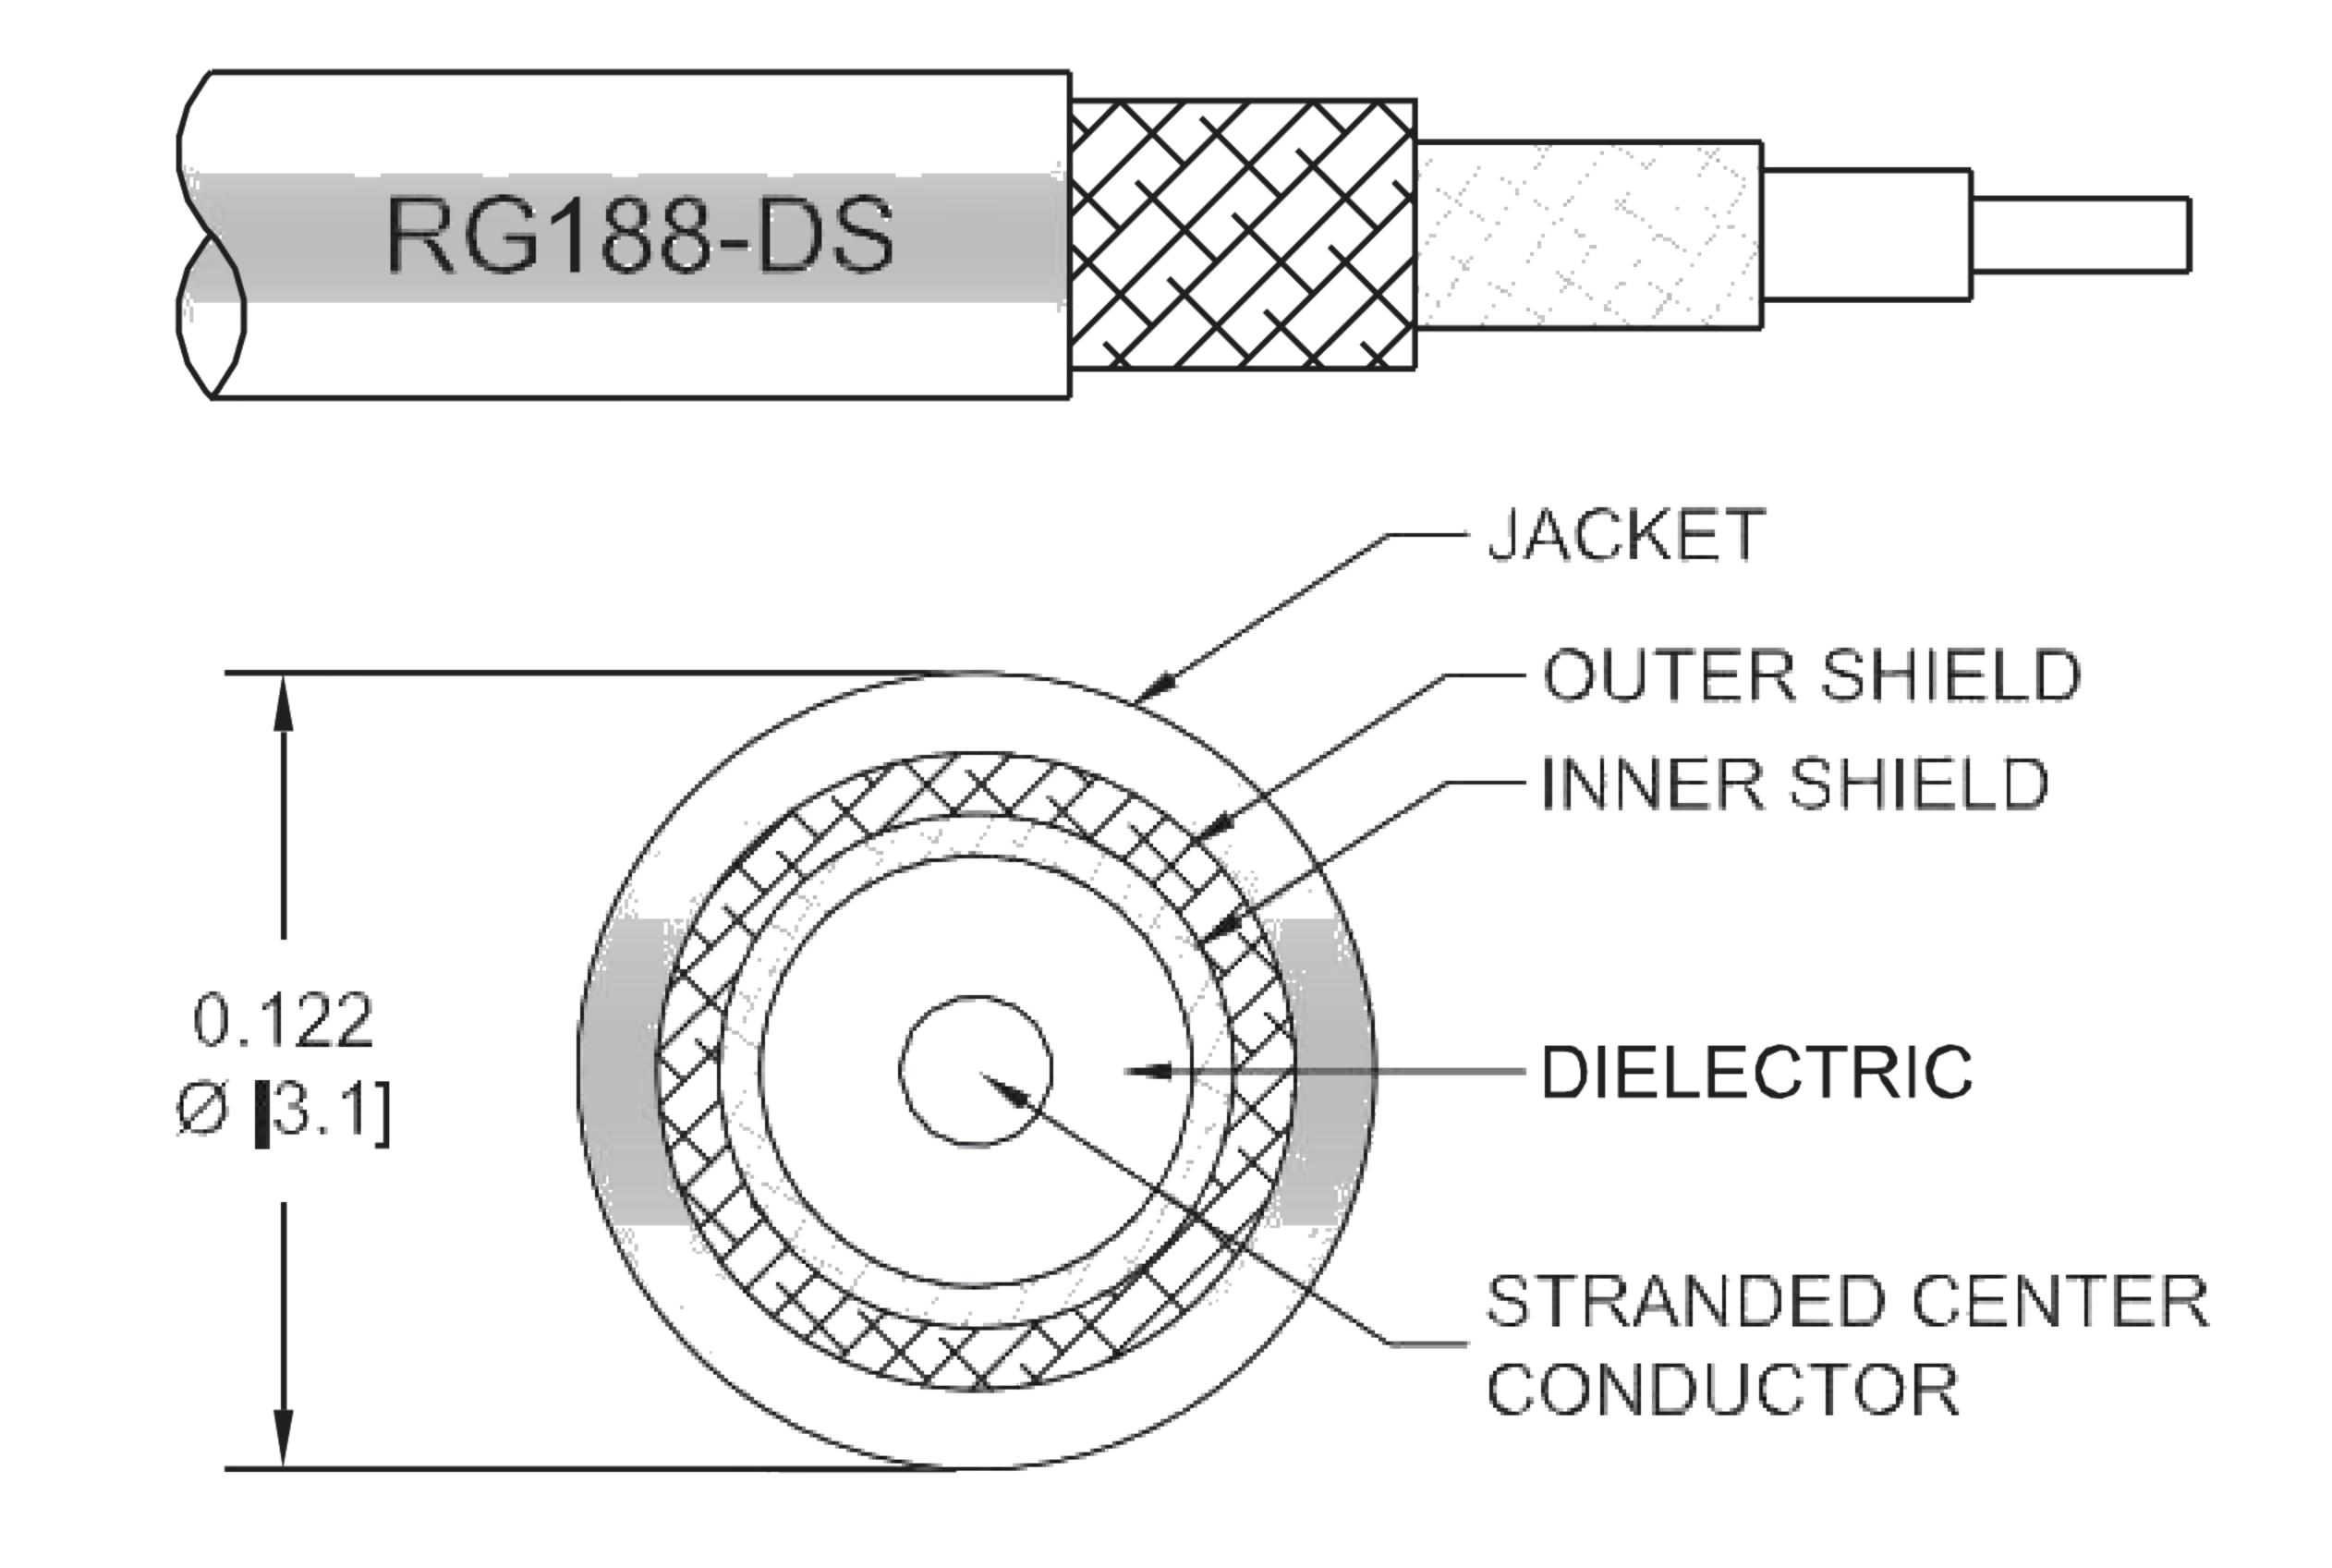

# Applications

General Purpose

Laboratory Use

#### Description

Ebeestock's ET26268 MMCX plug right angle to SMA female bulkhead 60 inch cable using ET38398 coax is part of our full line of RF components available for same-day shipping. Ebeestock's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Ebeestock MMCX to SMA cable assembly has a plug to female gender configuration with 50 ohm flexible ET38398 coax. The ET26268 MMCX plug to SMA female cable assembly operates to 6 GHz. The right angle MMCX interface on the ET38398 cable allows for easier connections in tight spaces. Our RF cable assembly with SMA bulkhead interface allows designers to create external connections on their prod- uct enclosures, and can be used in a variety of other rack mount and panel mount applications. The double shielding of this Ebeestock cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.5:1	
Capacitance		32 [104.99]		pF/ft [pF/m]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: MMCX Plug Right Angle to SMA Female Bulkhead Cable 60 Inch Length Using ET38398 Coax with HeatShrink ET26268

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



MMCX Plug Right Angle to SMA Female Bulkhead Cable 60 Inch L ength Using ET38398 Coax with HeatShrink



### RF Cable Assemblies Technical Data Sheet

ET26268

#### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.5	1	2	4	6	GHz
Insertion Loss (Max.)	0.68	1.8	1.55	2.9	4.25	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax use in this assembly. The Insertion Loss includes an estimated insertion loss of 0.3dB of connector Loss

## Mechanical Specifications

#### Cable Assembly

Length\* 60 in [152.4 cm]

Cable

Cable Type
Impedance
Inner Conductor Type

ET38398

50 Ohms
Stranded

Inner Conductor Material and Plating Copper Clad Steel, Silver

Dielectric Type

Number of Shields

2

Shield Layer 1
Silver Plated Copper Braid
Shield Layer 2
Silver Plated Copper Braid

Jacket Material
PTFE, White
Jacket Diameter
0.118 in [3 mm]

#### Connectors

Description	Connector 1	Connector 2 SMA Female Bulkhead	
Туре	MMCX Plug Right Angle		
Specification	BS EN 122340		
Impedance	50 Ohms	50 Ohms	
Contact Material and Plating	Brass, Gold	Gold	
Contact Plating Specification	30μ in. minimum		
Dielectric Type	Teflon		
Body Material and Plating	Brass, Gold	Brass, Nickel	
Body Plating Specification	3μ in. minimum		

Mechanical Specification Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: MMCX Plug Right Angle to SMA Female Bulkhead Cable 60 Inch Length Using ET38398 Coax with HeatShrink ET26268

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.

<sup>\*</sup>All cable assemblies have a length tolerance of 1.5% or ± 3/8", whichever is greater.



MMCX Plug Right Angle to SMA Female Bulkhead Cable 60 Inch L ength Using ET38398 Coax with HeatShrink



### RF Cable Assemblies Technical Data Sheet

ET26268

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

**How to Order** 

Part Number Configuration: ET3W00934/HS - XX uu -Unit of Measure: cm = Centimeters <black> = Inches Length Base Number

ET3W00934/HS-12 = 12 inches long cable Example:

ET3W00934/HS-100cm = 100 cm long cable

MMCX Plug Right Angle to SMA Female Bulkhead Cable 60 Inch Length Using ET38398 Coax with HeatShrink from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: MMCX Plug Right Angle to SMA Female Bulkhead Cable 60 Inch Length Using ET38398 Coax with HeatShrink ET26268

URL: https://www.ebeestock.com/mmcx-plug-right-angle-to-sma-female-bulkhead-cable-12-inch-lengt h-using-rg188-ds-coax-with-heatshrink-0026264

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

www.ebeestock.com

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.

