



RF Cable Assemblies Technical Data Sheet


ET26812

Configuration

Connector 1: N Male
Connector 2: SMA Male
Cable Type: ET38354

Features

- SMA Body diameter of 0.49 inches
- 83% Velocity of Propagation
- Shielding effectiveness > 95 dB
- Maximum VSWR is < 1.35:1 to 18 GHz
- Minimum Bend Radius of 1.5 inches
- Operating Temperature range of -55 to +125 °C
- ROHS and REACH Compliant
- Same day shipment of custom lengths
- 100% Continuity and RF tested

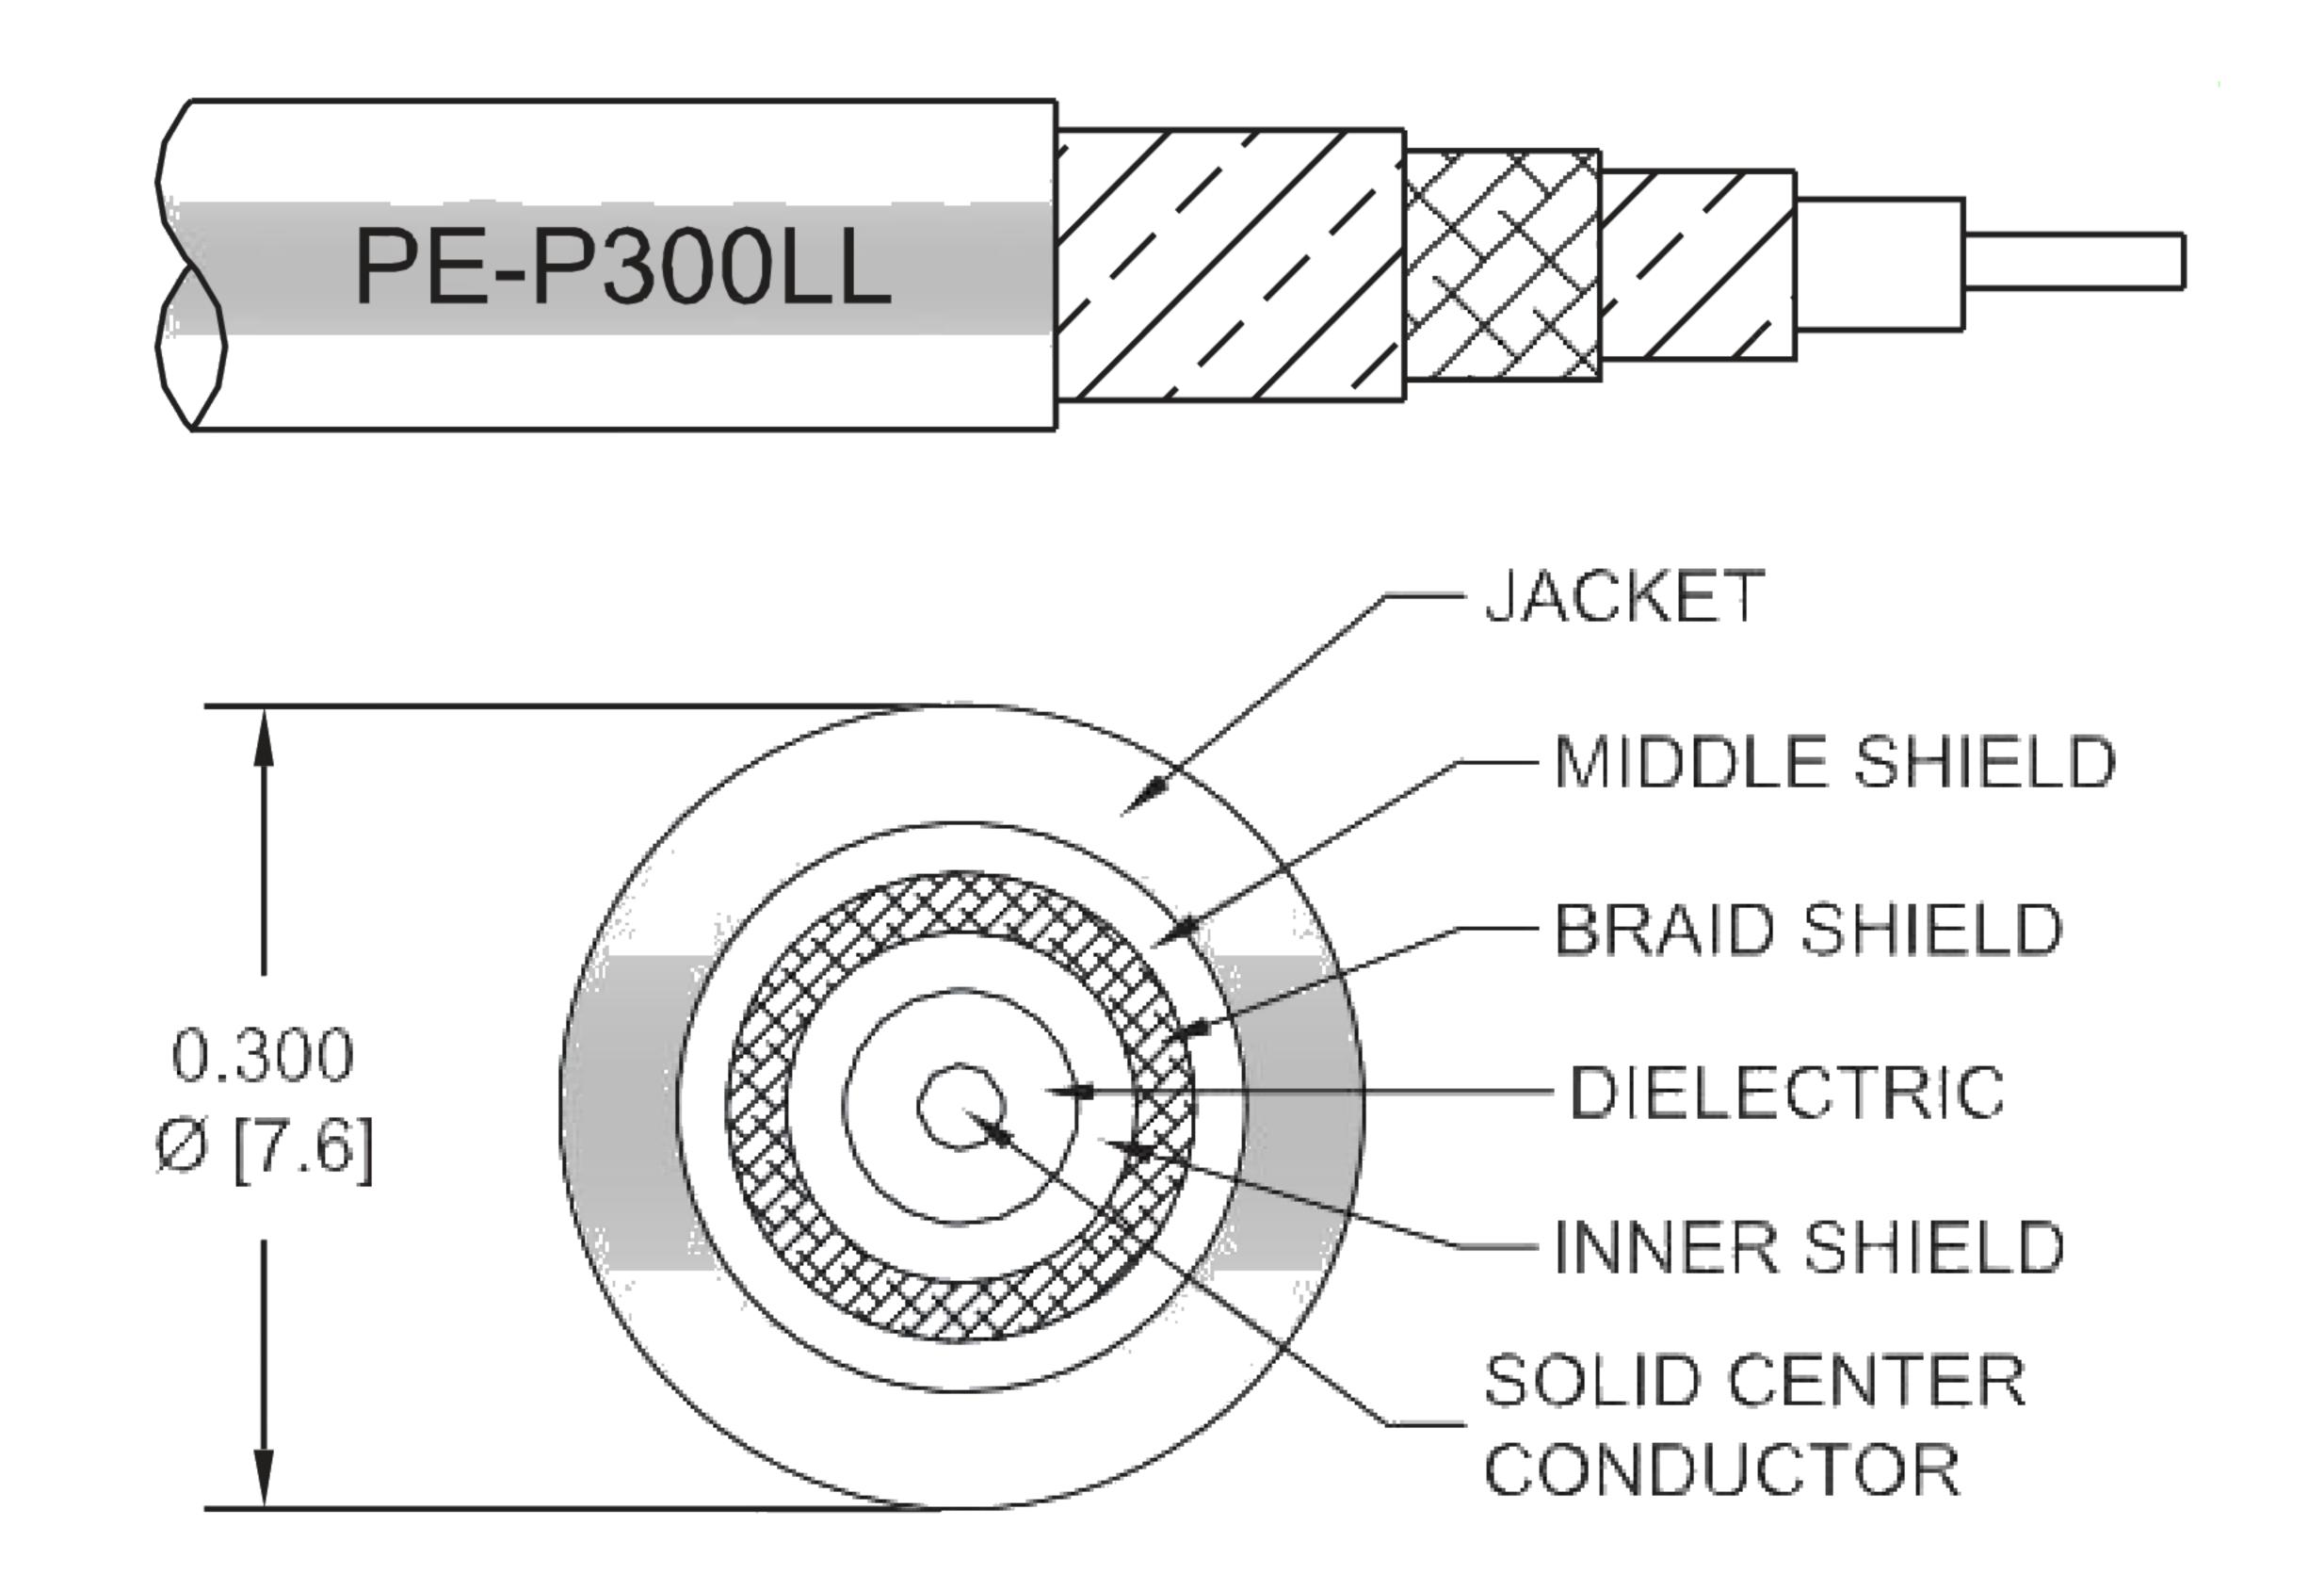

Description

The ET330 high performance test cable's 0.3 inch diameter and 83% phase velocity offer very low loss performance up to 18 GHz. The durable stainless steel connectors and FEP jacket provide a cost effective design ideal for test environments where a rugged cable assembly is required. The reduced 0.49 inch diameter SMA body allows for attachment to closely spaced connection points found on multiport components and interface panels. The series is offered with Type N, TNC, and SMA connectors all rated to 18 GHz. A heavy Duty boot provides improved strain relief and adds to the durability of the cable assemblies. These cable assemblies are built using a double shielded flexible cable, providing excellent shielding effectiveness of greater than 95 dB. All ET330 cable assemblies are 100% Continuity and RF tested to published specifications. Custom lengths are built to order and shipped same day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
VSWR			1.35:1	
Velocity of Propagation		83		%
RF Shielding	95			dB
Capacitance		25 [82.02]		pF/ft [pF/m]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: N Male to SMA Male with Reduced Diameter SMA Body Low Loss Test Cable 60 Inch Length Using ET38354 Coax, RoHS ET26812





RF Cable Assemblies Technical Data Sheet

ET26812

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	1	2	4.5	9	18	GHz
Insertion Loss (Max.)	0.5	0.6	0.8	1.1	1.5	dB
Insertion Loss (Typ.)	0.45	0.55	0.7	0.95	1.3	dB
Power Handling (Max.)	1,800	1,200	900	650	400	Watts

Mechanical Specifications

Cable Assembly

Jacket Diameter

Length* 60 in [152.4 cm]
Diameter 0.75 in [19.05 mm]

Cable

Cable Type
Impedance
Inner Conductor Type
Inner Conductor Material and Plating

ET38354
50 Ohms
Solid
Copper, Sil

Inner Conductor Material and Plating

Dielectric Type

Number of Shields

Shield Layer 1

Shield Layer 2

Shield Layer 3

Jacket Material

Copper, Silver

PTFE

Silver Plated Copper Tape

Aluminum Polyester

Silver Plated Copper Wire

FEP, Green

Repeated Minimum Bend Radius 1.5 in [38.1 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: N Male to SMA Male with Reduced Diameter SMA Body Low Loss Test Cable 60 Inch Length Using ET38354 Coax, RoHS ET26812

0.3 in [7.62 mm]





RF Cable Assemblies Technical Data Sheet

ET26812

Connectors

Description	Connector 1	Connector 2 SMA Male	
Туре	N Male		
Specification		MIL-STD-348	
Impedance	50 Ohms	50 Ohms	
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold	
Contact Plating Specification	ASTM-B488 50μ In.	ASTM-B488 50μ In.	
Dielectric Type	PTFE	PTFE	
Outer Conductor Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel	
Outer Conductor Plating Specification	SAE-AMS-2700	SAE-AMS-2700	
Coupling Nut Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel	
Coupling Nut Plating Specification	SAE-AMS-2700	SAE-AMS-2700	
Hex Size	3/4 Inch	5/16 Inch	
Torque	14 in-lbs [1.58 Nm]	8 in-lbs [0.9 Nm]	
Body Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel	
Body Plating Specification	SAE-AMS-2700	SAE-AMS-2700	

Mechanical Specification Notes:

Environmental Specifications

Temperature

Operating Range

-55 to +125 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: N Male to SMA Male with Reduced Diameter SMA Body Low Loss Test Cable 60 Inch Length Using ET38354 Coax, RoHS ET26812

^{*}All cable assemblies have a length tolerance of 1.5% or ± 3/8", whichever is greater.






RF Cable Assemblies Technical Data Sheet

ET26812

How to Order

Part Number Configuration:

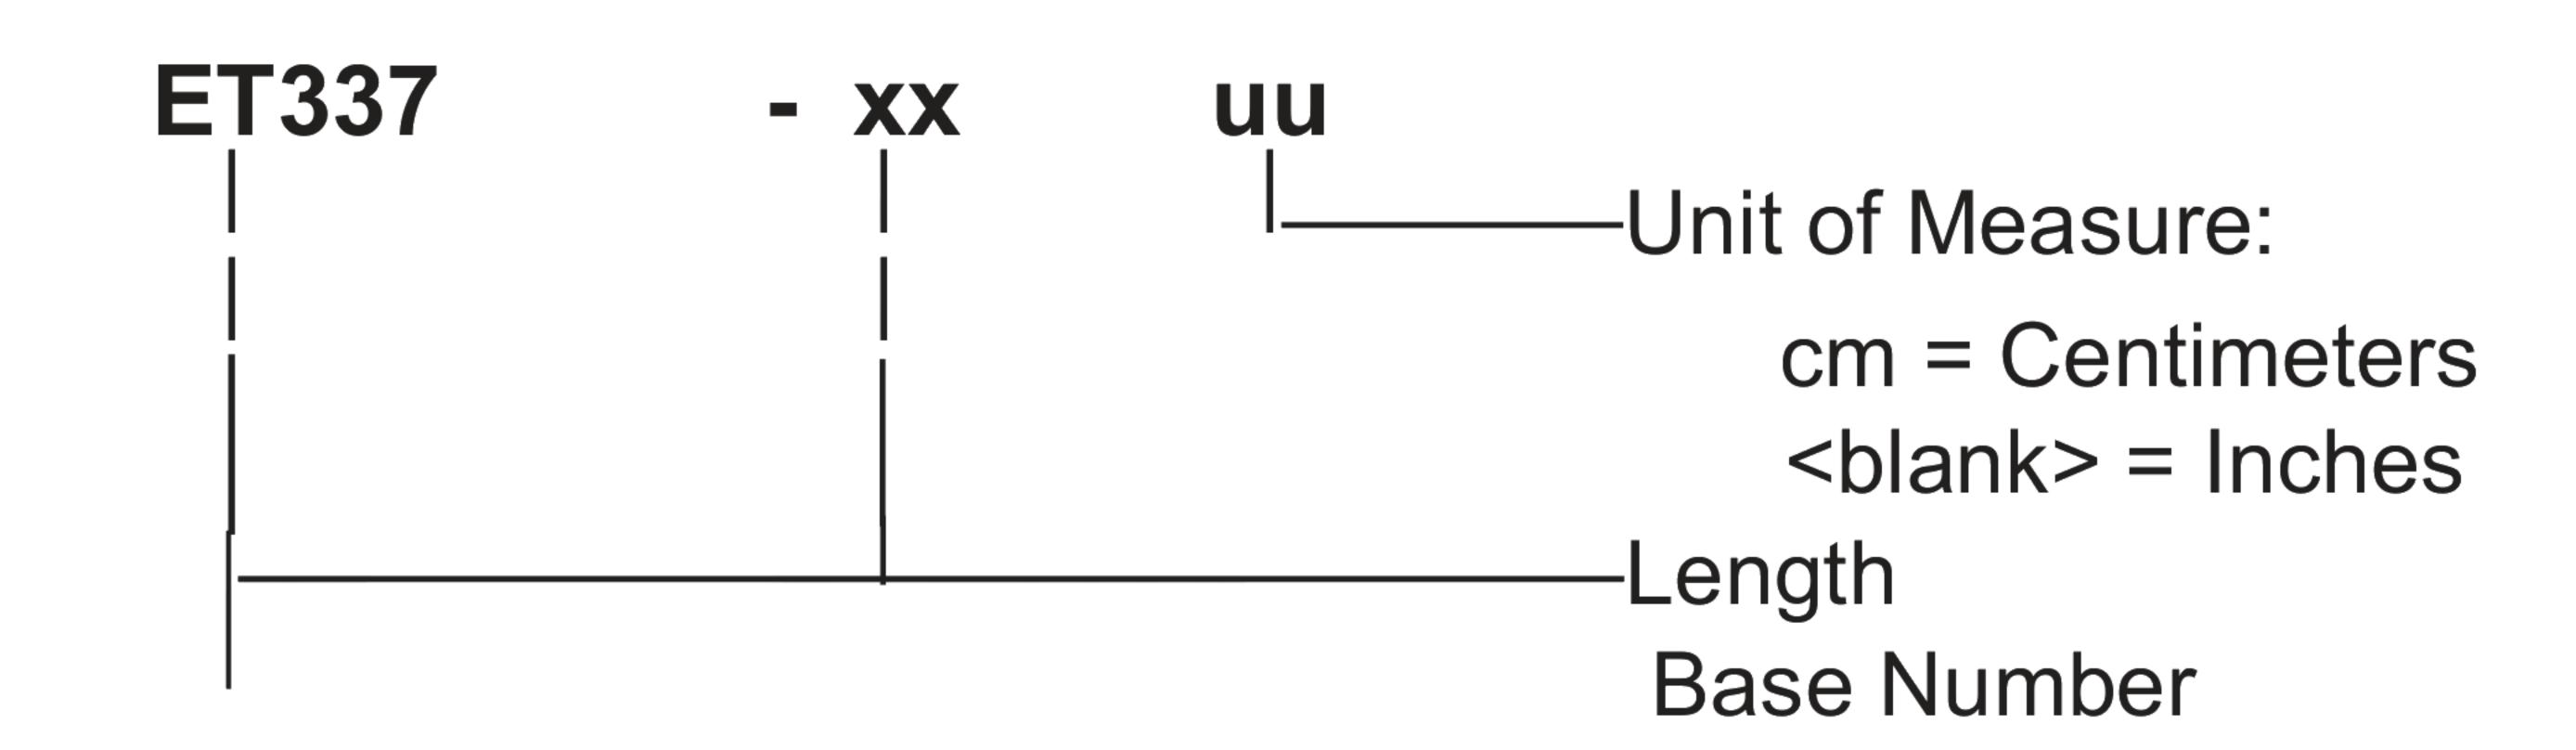

Example: ET337-12 = 12 inches long cable

ET337-100cm = 100 cm long cable

N Male to SMA Male with Reduced Diameter SMA Body Low Loss Test Cable 60 Inch Length Using ET38354 Coax, RoHS from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: N Male to SMA Male with Reduced Diameter SMA Body Low Loss Test Cable 60 Inch Length Using ET38354 Coax, RoHS ET26812

URL: https://www.ebeestock.com/n-male-to-sma-male-with-reduced-diameter-sma-body-low-loss-test-cable-12-inch-length-using-pe-p300ll-coax-rohs-0026808

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

ET26812 CAD Drawing

N Male to SMA Male with Reduced Diameter SMA Body Low Loss Test Cable 60 Inch Length Using ET38354 Coax, RoHS

