


| COMPONENTS         | IMPEDANCE |
|--------------------|-----------|
| N MALE RIGHT ANGLE | 50 OHM    |
| N MALE RIGHT ANGLE | 50 OHM    |
| RG8A/U             | 52 OHM    |


| Standard Lengths |                         |
|------------------|-------------------------|
| -12              | 12"                     |
| -24              | 24"                     |
| -36              | 36"                     |
| -48              | 48"                     |
| -60              | 60"                     |
| -xxx             | Custom Length in inches |



N MALE  
RIGHT ANGLE

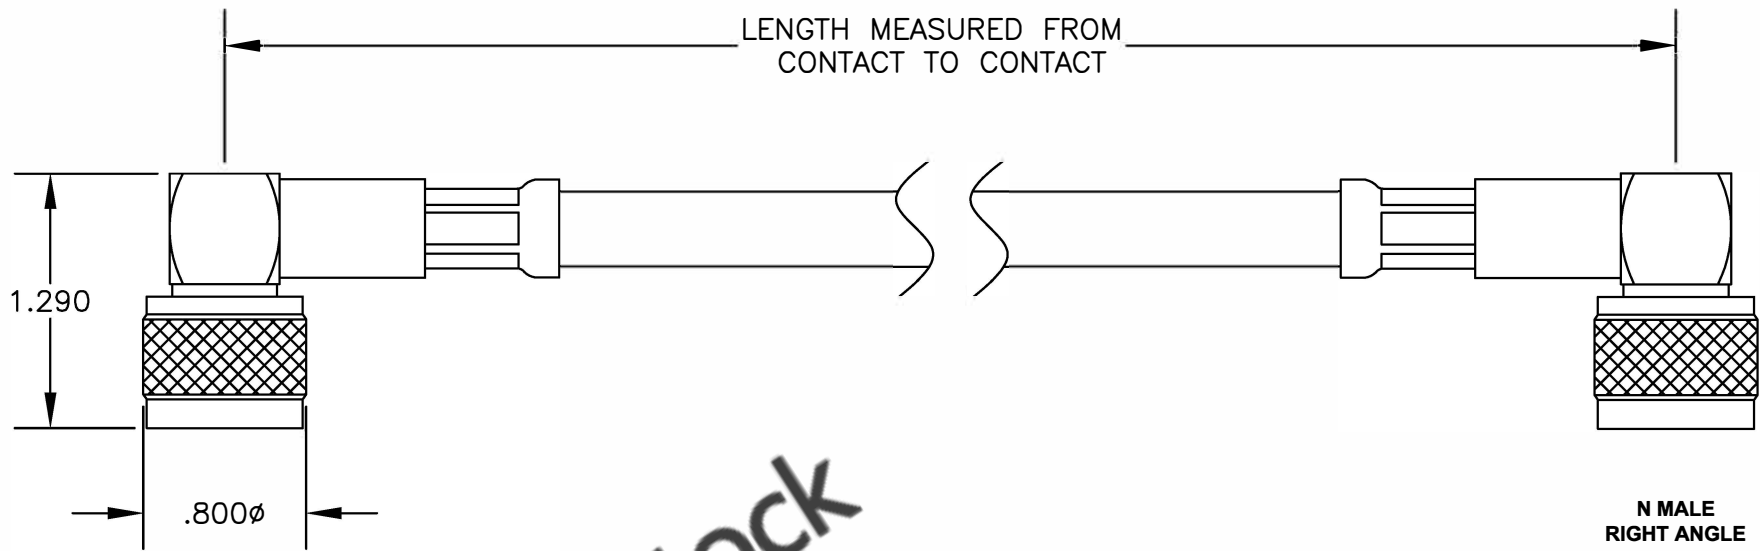

ebeestock

|  |                     |
|--|---------------------|
|  <b>8TH FLOOR, BUILDING 1, YONGFU SCIENCE AND TECHNOLOGY CENTER INDUSTRIAL PARK, NANZHA DISTRICT 5, HUMEN, 523900, DONGGUAN, GUANGDONG, CHINA</b> |                     |
| <b>ebeestock</b><br>WEBSITE: <a href="http://www.ebeestock.com">www.ebeestock.com</a><br>EMAIL: <a href="mailto:sales@ebeestock.com">sales@ebeestock.com</a><br><b>COAXIAL &amp; FIBER OPTICS</b>                                      |                     |
| <b>ET26845</b>   |                     |
| DES. CABLE ASSEMBLY, RG8A/U, N MALE RIGHT ANGLE TO N MALE RIGHT ANGLE  |                     |
| SIZE A   | <b>FSCMNO.53919</b> |
| CAD FILE   | 021607              |
| SCALE  | N/A                 |
| 127  |                     |

- NOTES:**
- UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
  - ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
  - DIMENSIONS ARE IN INCHES.
  - LENGTH TOLERANCE IS  $\pm 1.5\%$  OR  $\pm 3/8"$ , WHICHEVER IS GREATER.