

N Male Right Angle to N Female Bulkhead Cable 60 Inch Length Using ET-RG225 Coax , LF Solder



RF Cable Assemblies Technical Data Sheet

ET27178

Configuration

Connector 1: N Male Right Angle
Connector 2: N Female Bulkhead

Cable Type: ET-RG225

Features

- Max Frequency 400 MHz
- Double Shielded
- PTFE (FG) Jacket

Applications

General Purpose

Laboratory Use

Description

Ebeestock's ET27178 type N male right angle to type N female bulkhead 60 inch cable using ET-RG225 coax is part of our full line of RF components available for same-day shipping. Ebeestock's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Ebeestock type N to type N cable assembly has a male to female gender configuration with 50 ohm flexible ET-RG225 coax. The ET27178 type N male to type N female cable assembly operates to 400 MHz. The right angle type N interface on the ET-RG225 cable allows for easier connections in tight spaces. Our RF cable assembly with type N bulkhead interface allows designers to create external connections on their product enclo- sures, and can be used in a variety of other rack mount and panel mount applications. The double shielding of this Ebeestock cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

	400	MHz
32.4 [106.3]		pF/ft [pF/m]
	32.4 [106.3]	

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: N Male Right Angle to N Female Bulkhead Cable 60 Inch Length Using ET-RG225 Coax, LF Solder ET27178

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



N Male Right Angle to N Female Bulkhead Cable 60 Inch Length Using ET-RG225 Coax , LF Solder



RF Cable Assemblies Technical Data Sheet

ET27178

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	50	100	250	500	1,000	MHz
Insertion Loss (Typ.)	0.231	0.263	0.356			dB

Mechanical Specifications

Cable Assembly

 Length*
 60 in [152.4 cm]

 Diameter
 0.815 in [20.7 mm]

 Weight
 1.203 lbs [545.67 g]

Cable

Cable Type
Impedance
Inner Conductor Type
Inner Conductor Material and Plating
Dielectric Type

ET-RG225
50 Ohms
Stranded
Copper, Silver
PTFE

Number of Shields
Shield Layer 1

Shield Layer 1
Shield Layer 2
Silver Plated Copper Braid
Silver Plated Copper Braid
PTFE (FG), Tan
Jacket Diameter

0.43 in [10.92 mm]

Connectors

Description	Connector 1	Connector 2
Туре	N Male Right Angle	N Female Bulkhead
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification		30μ in. minimum
Dielectric Type	Teflon	Teflon
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification		100μ in. minimum
Coupling Nut Material and Plating	Brass, Nickel	

Mechanical Specification Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: N Male Right Angle to N Female Bulkhead Cable 60 Inch Length Using ET-RG225 Coax, LF Solder ET27178

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.

^{*}All cable assemblies have a length tolerance of 1.5% or ± 3/8", whichever is greater.



N Male Right Angle to N Female Bulkhead Cable 60 Inch Length Using ET-RG225 Coax, LF Solder



RF Cable Assemblies Technical Data Sheet

ET27178

Compliance Certifications (see product page for current document)


Plotted and Other Data

Notes:

Values at 25°C, sea level.

How to Order

Part Number Configuration:

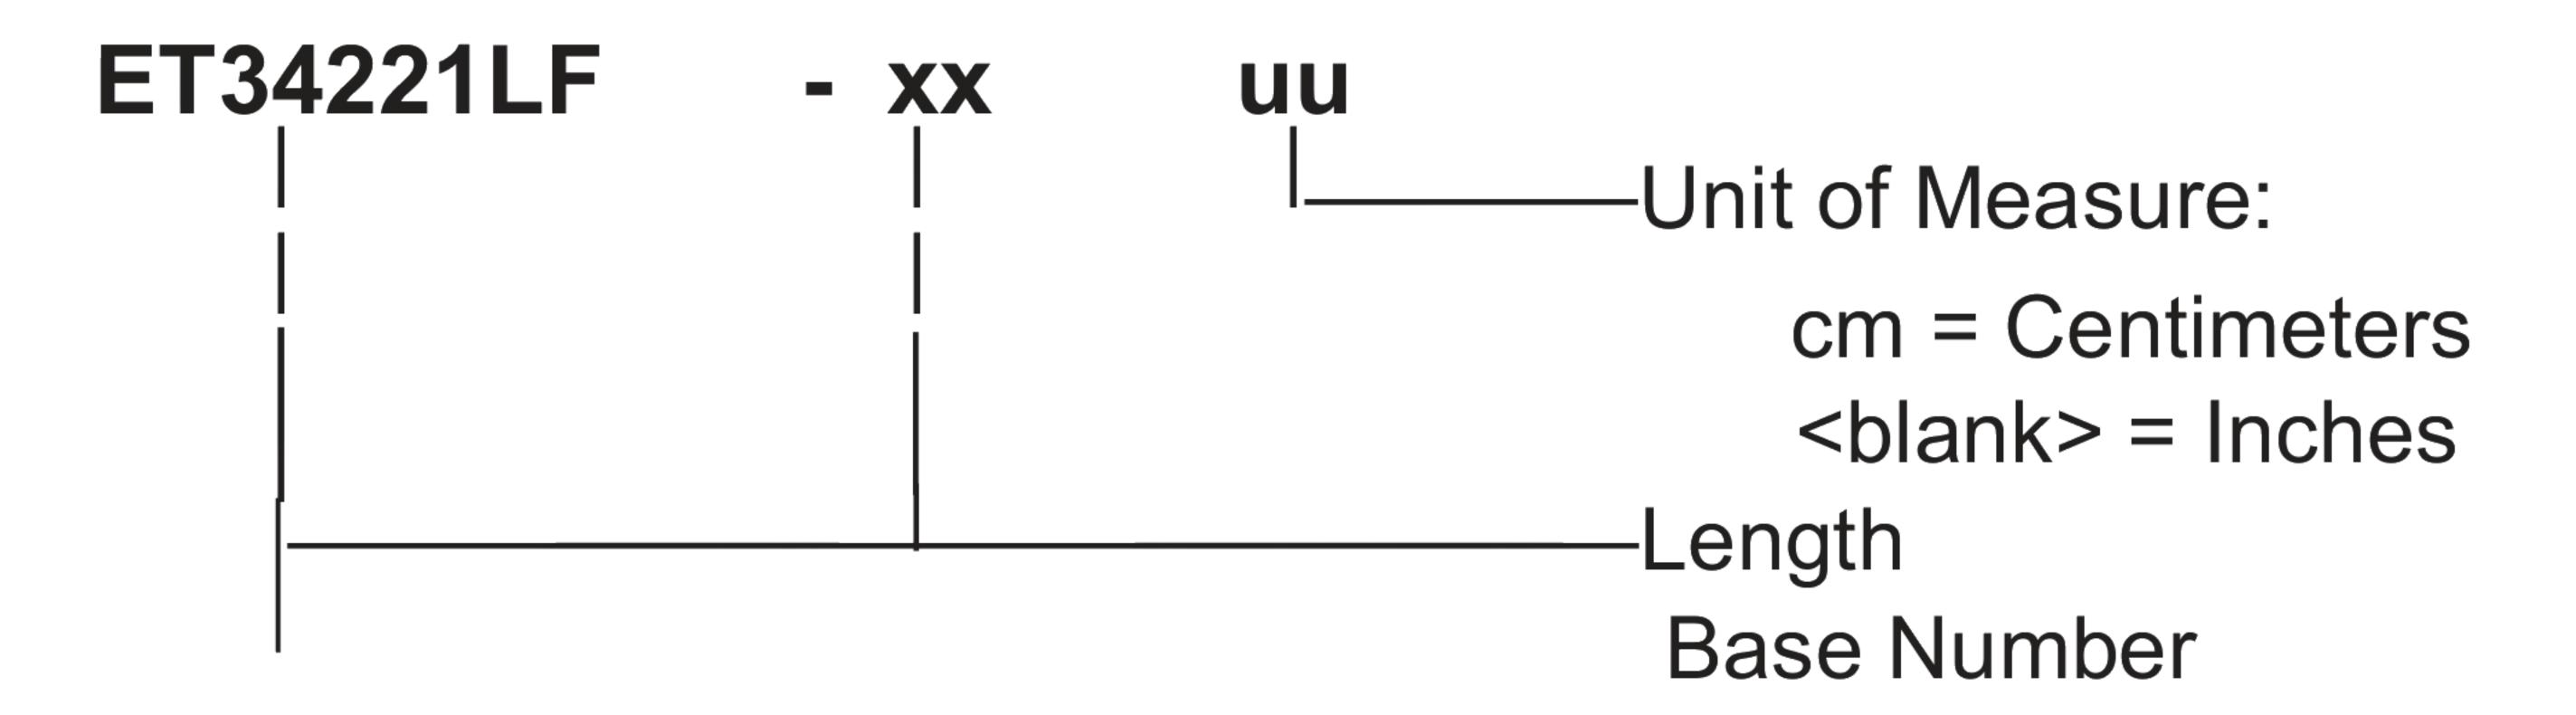

ET34221LF-12 = 12 inches long cable Example:

ET34221LF-100cm = 100 cm long cable

N Male Right Angle to N Female Bulkhead Cable 60 Inch Length Using ET-RG225 Coax, LF Solder from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: N Male Right Angle to N Female Bulkhead Cable 60 Inch Length Using ET-RG225 Coax, LF Solder ET27178

URL: https://www.ebeestock.com/n-male-right-angle-to-n-female-bulkhead-cable-12-inch-length-usi ng-rg225-coax-lf-solder-0027174

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

www.ebeestock.com

