

N Male Right Angle to N Male Right Angle Cable 24 Inch Lengt h Using ET-RG225 Coax , LF Solder



RF Cable Assemblies Technical Data Sheet

ET27187

Configuration

Connector 1: N Male Right Angle
Connector 2: N Male Right Angle
Cable Type: ET-RG225

Features

- Max Frequency 400 MHz
- Double Shielded
- PTFE (FG) Jacket

Applications

General Purpose

Laboratory Use

Description

Ebeestock's ET27187 type N male right angle to type N male right angle 24 inch cable using ET-RG225 coax is part of our full line of RF components available for same-day shipping. Ebeestock's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Ebeestock type N to type N cable assembly has a male to male gender configuration with 50 ohm flexible ET-RG225 coax. The ET27187 type N male to type N male cable assembly operates to 400 MHz. The right angle type N interfaces on the ET-RG225 cable allow for easier connections in tight spaces. The double shielding of this Ebeestock cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		400	MHz
Capacitance		32.4 [106.3]		pF/ft [pF/m]
Dielectric Withstanding Voltage (AC)			2,500	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	50	100	250	500	1,000	MHz
Insertion Loss (Typ.)	0.213	0.225	0.263			dB

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: N Male Right Angle to N Male Right Angle Cable 24 Inch Length Using ET-RG225 Coax, LF Solder ET27187

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



N Male Right Angle to N Male Right Angle Cable 24 Inch Lengt h Using ET-RG225 Coax , LF Solder



RF Cable Assemblies Technical Data Sheet

ET27187

Mechanical Specifications

Cable Assembly

 Length*
 24 in [609.6 mm]

 Diameter
 0.8 in [20.32 mm]

 Weight
 0.682 lbs [309.35 g]

Cable

Cable Type
Impedance
Inner Conductor Type
Inner Conductor Material and Plating
Dielectric Type
Number of Shields
Shield Layer 1
Shield Layer 2

ET-RG225
50 Ohms
Copper, Silver
Ptree
Stranded
Copper, Silver
PTFE
Silver Plated Copper Braid

Shield Layer 2
Jacket Material
Jacket Diameter

Silver Plated Copper Braid
PTFE (FG), Tan
0.43 in [10.92 mm]

Connectors

Description	Connector 1	Connector 2	
Type	N Male Right Angle	N Male Right Angle	
Specification	MIL-STD-348A	MIL-STD-348A	
Impedance	50 Ohms	50 Ohms	
Contact Material and Plating	Brass, Gold	Brass, Gold	
Dielectric Type	Teflon	Teflon	
Body Material and Plating	Brass, Nickel	Brass, Nickel	
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel	

Mechanical Specification Notes:

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: N Male Right Angle to N Male Right Angle Cable 24 Inch Length Using ET-RG225 Coax, LF Solder ET27187

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.

^{*}All cable assemblies have a length tolerance of 1.5% or ± 3/8", whichever is greater.



N Male Right Angle to N Male Right Angle Cable 24 Inch Lengt h Using ET-RG225 Coax , LF Solder




RF Cable Assemblies Technical Data Sheet

ET27187

How to Order

Part Number Configuration:

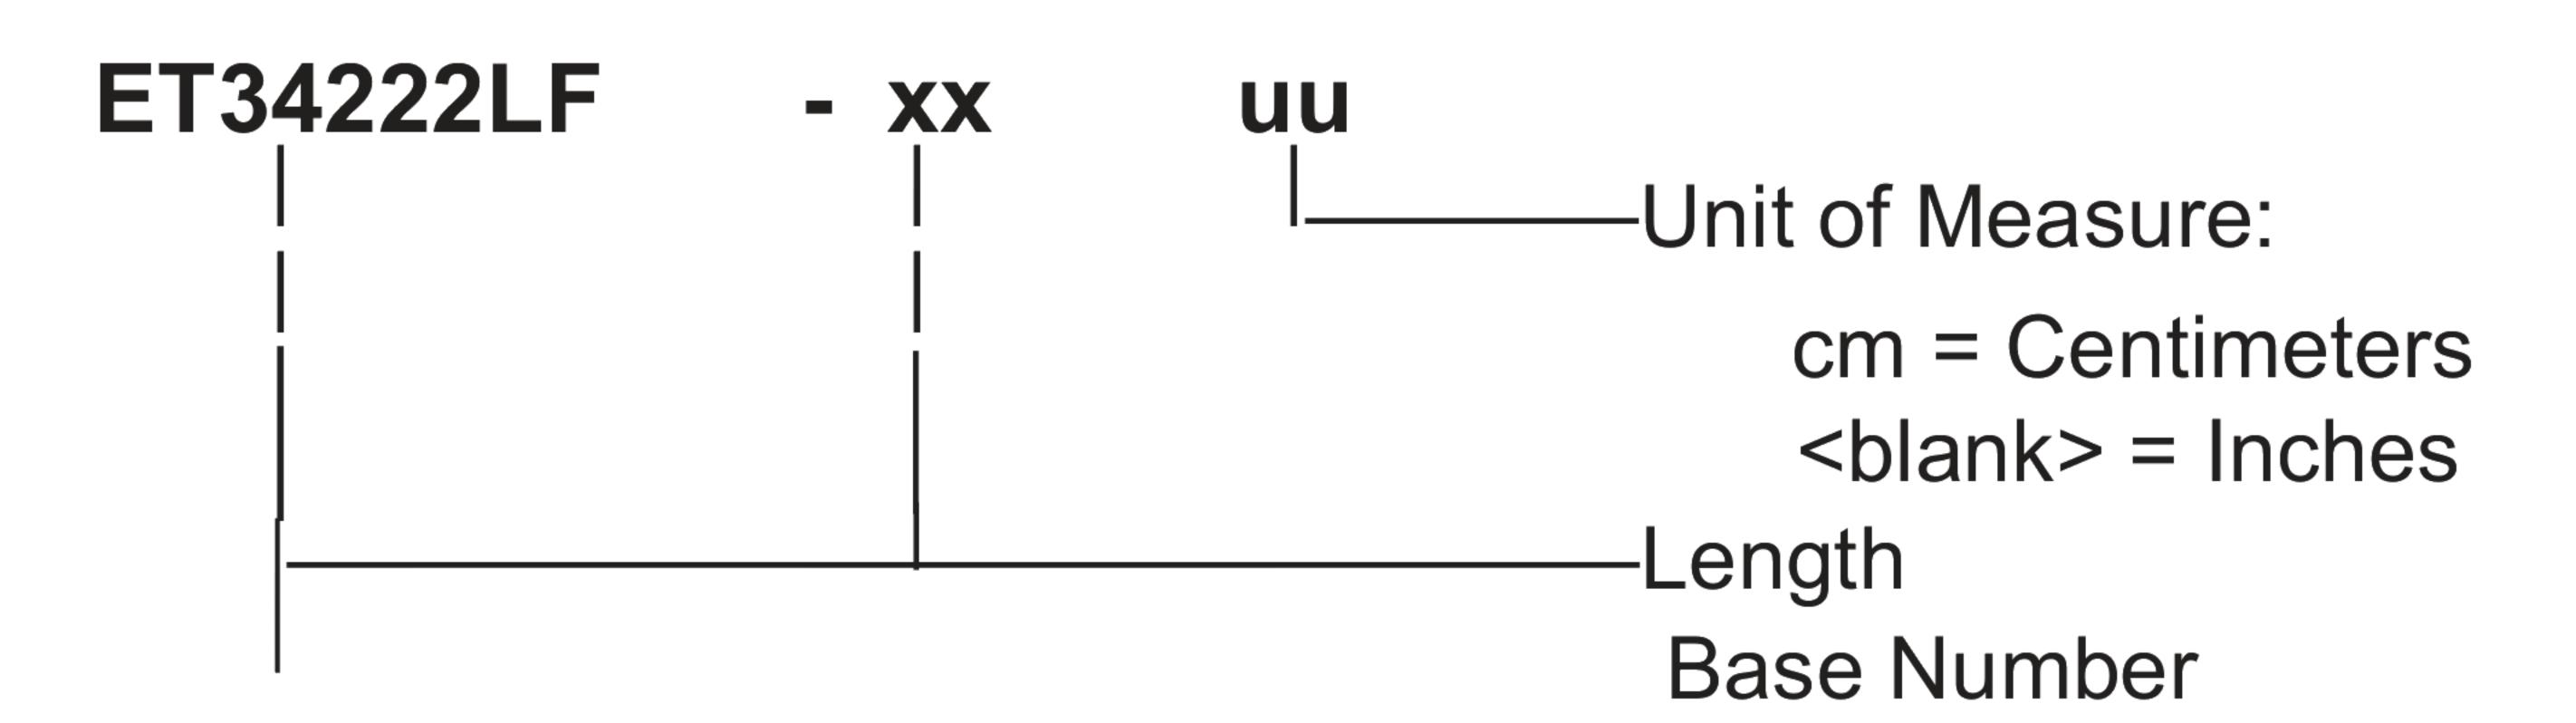

Example: ET34222LF-12 = 12 inches long cable

ET34222LF-100cm = 100 cm long cable

N Male Right Angle to N Male Right Angle Cable 24 Inch Length Using ET-RG225 Coax, LF Solder from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: N Male Right Angle to N Male Right Angle Cable 24 Inch Length Using ET-RG225 Coax, LF Solder ET27187

URL: https://www.ebeestock.com/n-male-right-angle-to-n-male-right-angle-cable-12-inch-length-us ing-rg225-coax-lf-solder-0027186

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.

