



| COMPONENTS | IMPEDANCE |
|------------|-----------|
| N MALE     | 50 OHM    |
| N FEMALE   | 50 OHM    |
|            |           |
|            |           |

| Standard Lengths |                         |
|------------------|-------------------------|
| -12              | 12"                     |
| -24              | 24"                     |
| -36              | 36"                     |
| -48              | 48"                     |
| -60              | 60"                     |
| -XXX             | Custom Length in inches |
|                  |                         |

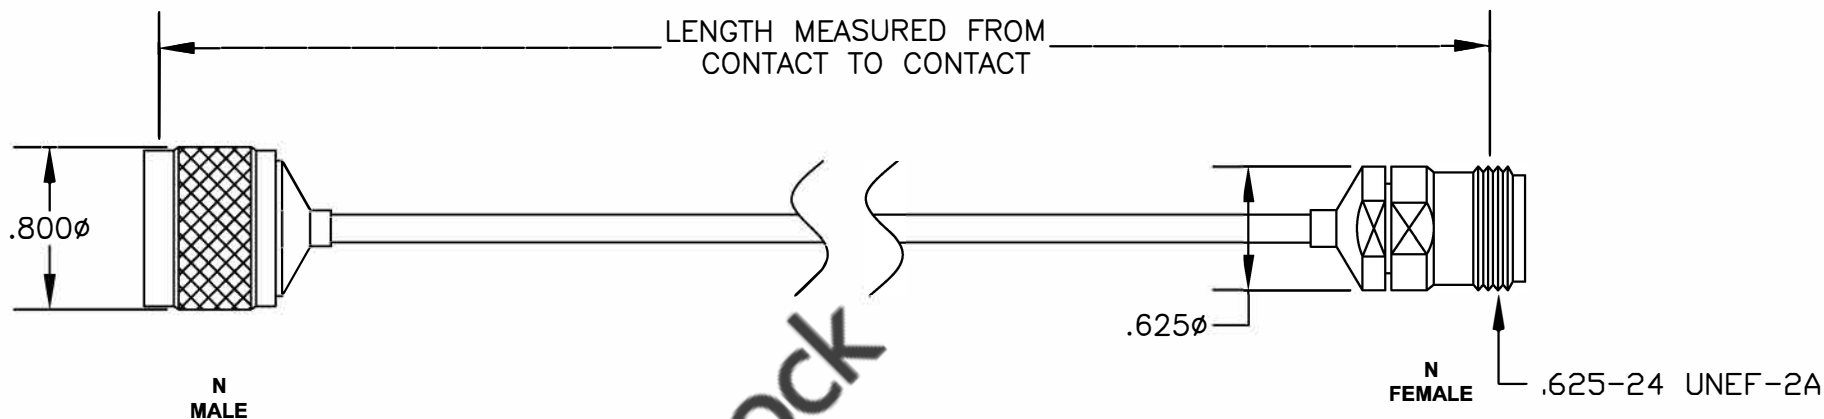

|  |                       |  |           |     |
|--|-----------------------|--|-----------|-----|
|  <b>8TH FLOOR, BUILDING 1, YONGFU SCIENCE AND TECHNOLOGY CENTER INDUSTRIAL PARK, NANZHA DISTRICT 5, HUMEN, 523900, DONGGUAN, GUANGDONG, CHINA</b>                 |                       |  |           |     |
| <b>ebeestock</b>   |                       | WEBSITE: <a href="http://www.ebeestock.com">www.ebeestock.com</a><br>EMAIL: <a href="mailto:sales@ebeestock.com">sales@ebeestock.com</a><br>COAXIAL & FIBER OPTICS |           |     |
| DWG TITLE<br><b>ET27480</b>  |                       | DES. CABLE ASSEMBLY, N MALE TO N FEMALE  |           |     |
| SIZE A   | <b>FSCM NO. 53919</b> | CAD FILE 081307  | SCALE N/A | 127 |
| <b>NOTES:</b><br>1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.<br>2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.<br>3. DIMENSIONS ARE IN INCHES.<br>4. LENGTH TOLERANCE IS ± 1.5% OR ±3/8", WHICHEVER IS GREATER. |                       |  |           |     |