



| COMPONENTS                | IMPEDANCE |
|---------------------------|-----------|
| REVERSE POLARITY TNC MALE | 50 OHM    |
| STANDARD N MALE           | 50 OHM    |
| RG316/U                   | 50 OHM    |

| Standard Lengths |                         |
|------------------|-------------------------|
| -12              | 12"                     |
| -24              | 24"                     |
| -36              | 36"                     |
| -48              | 48"                     |
| -60              | 60"                     |
| -XXX             | Custom Length in inches |

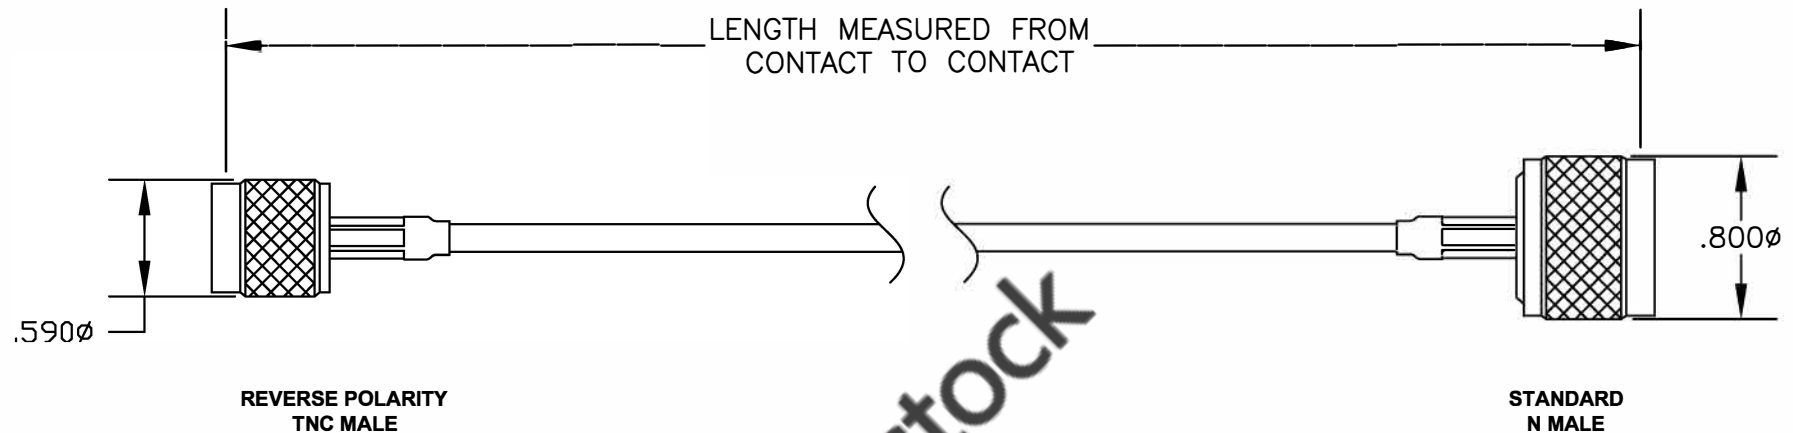


**8TH FLOOR, BUILDING 1, YONGFU SCIENCE AND TECHNOLOGY CENTER INDUSTRIAL PARK, MANZHA DISTRICT 5, HUMEN, 523900, DONGGUAN, GUANGDONG, CHINA**  
 WEBSITE: [www.ebeestock.com](http://www.ebeestock.com)  
 EMAIL: [sales@ebeestock.com](mailto:sales@ebeestock.com)  
**COAXIAL & FIBER OPTICS**

|                             |                |  |        |
|-----------------------------|----------------|--|--------|
| DWG TITLE<br><b>ET27588</b> |                | DES. CABLE ASSEMBLY, RG316/U, REVERSE POLARITY TNC MALE TO STANDARD N MALE |        |
| SIZE A                      | FSCM NO. 53919 | CAD FILE   | 022307 |
|                             |                | SCALE  | N/A    |
|                             |                |  | 127    |

**NOTES:**  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
 3. DIMENSIONS ARE IN INCHES.  
 4. LENGTH TOLERANCE IS ± 1.5% OR ±3/8", WHICHEVER IS GREATER.