



| COMPONENTS | IMPEDANCE |
|------------|-----------|
| N MALE | 50 OHM |
| N MALE | 50 OHM |
| RG393/U | 50 OHM |
| | |

| Standard Lengths | |
|------------------|-------------------------|
| -12 | 12" |
| -24 | 24" |
| -36 | 36" |
| -48 | 48" |
| -60 | 60" |
| -XXX | Custom Length in inches |
| | |

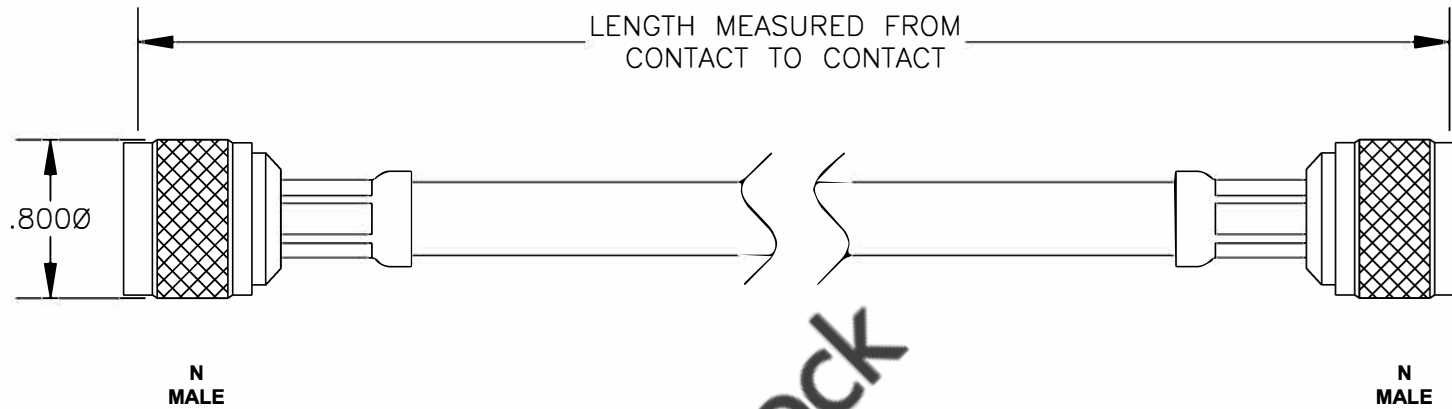

RoHS
Compliance
Certified

| | |
|---|--|
|  8TH FLOOR, BUILDING 1, YONGFU SCIENCE AND TECHNOLOGY CENTER INDUSTRIAL PARK, NANZHA DISTRICT 5, HUMEN, 523900, DONGGUAN, GUANGDONG, CHINA | |
| ebeestock WEBSITE: www.ebeestock.com EMAIL: sales@ebeestock.com COAXIAL & FIBER OPTICS | |
| DWG TITLE ET27632 | DES. CABLE ASSEMBLY, RG393/U, N MALE TO N MALE (LEAD FREE) |
| CAD FILE 021108 | SCALE N/A |
| SIZE A | 127 |
| REV. A FSCM NO. 53919 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. NOTES: SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES. 4. LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 3/8"$, WHICHEVER IS GREATER. | |