


| COMPONENTS | IMPEDANCE |
|------------|-----------|
| N MALE     | 50 OHM    |
| N FEMALE   | 50 OHM    |
| RG400/U    | 50 OHM    |
|            |           |

| Standard Lengths |                         |
|------------------|-------------------------|
| -12              | 12"                     |
| -24              | 24"                     |
| -36              | 36"                     |
| -48              | 48"                     |
| -60              | 60"                     |
| -XXX             | Custom Length in inches |
|                  |                         |

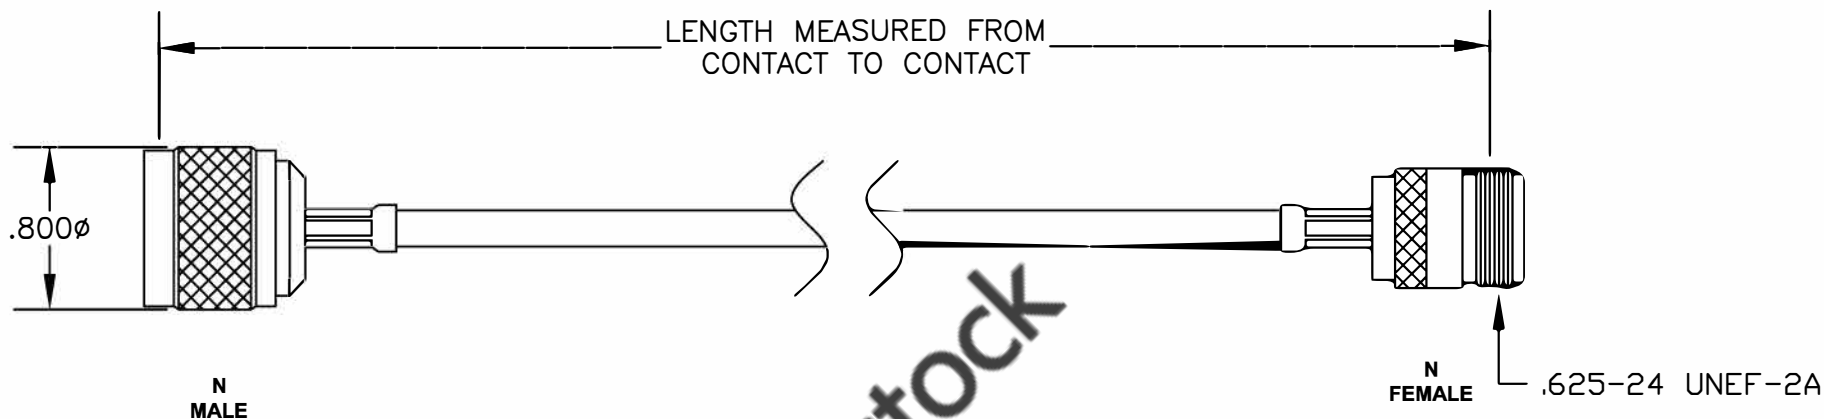

|  |   |                        |                  |            |
|--|---|------------------------|------------------|------------|
|  <p>8TH FLOOR, BUILDING 1, YONGFU SCIENCE AND TECHNOLOGY CENTER INDUSTRIAL PARK, NANZHA DISTRICT 5, HUMEN, 523900, DONGGUAN, GUANGDONG, CHINA</p> <p>WEBSITE: <a href="http://www.ebeestock.com">www.ebeestock.com</a><br/>EMAIL: <a href="mailto:sales@ebeestock.com">sales@ebeestock.com</a><br/>COAXIAL &amp; FIBER OPTICS</p> |   |                        |                  |            |
| <p>DWG TITLE</p> <h2 style="color: blue;">ET27647</h2>   | <p>DES. CABLE ASSEMBLY, RG400/U, N MALE TO N FEMALE</p> |                        |                  |            |
| <p>SIZE A</p>  | <p>FSCM NO. 53919</p>                                   | <p>CAD FILE 052407</p> | <p>SCALE N/A</p> | <p>127</p> |

- NOTES:**
- UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
  - ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
  - DIMENSIONS ARE IN INCHES.
  - LENGTH TOLERANCE IS  $\pm 1.5\%$  OR  $\pm 3/8"$ , WHICHEVER IS GREATER.