

COMPONENTS	IMPEDANCE
N MALE	50 OHM
N MALE RIGHT ANGLE	50 OHM
RG8A/U	52 OHM
-	

	Standard Lengths
-12	12"
-24	24"
-36	36"
-48	48"
-60	60"
-xxx	Custom Length in inches

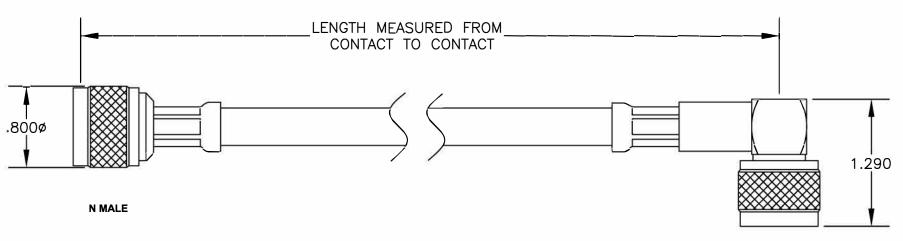

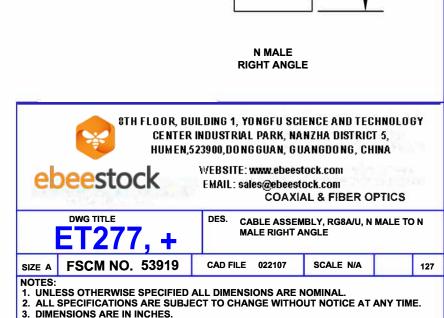

4. LENGTH TOLERANCE IS ± 1.5% OR ±3/8", WHICHEVER IS GREATER.