


N Male Right Angle to N Female Bulkhead Low Loss Cable 12 Inch Length Using Coax, RoHS



NOTE:
 LABEL FOR CABLE LENGTHS 48" OR SHORTER TO BE CENTERED. 48" OR LONGER WILL BE 12" AWAY FROM CONNECTOR.

| Part # Ext. | Length In Inches | Part # Ext. | Length In Centimeters |
|-------------|------------------|-------------|-----------------------|
| -12 | 12" | -25CM | 25Cm |
| -24 | 24" | -50CM | 50Cm |
| -36 | 36" | -75CM | 75Cm |
| -48 | 48" | -100CM | 100Cm |
| -60 | 60" | -125CM | 125Cm |
| -XX | Custom Length | -xxCM | Custom Length |

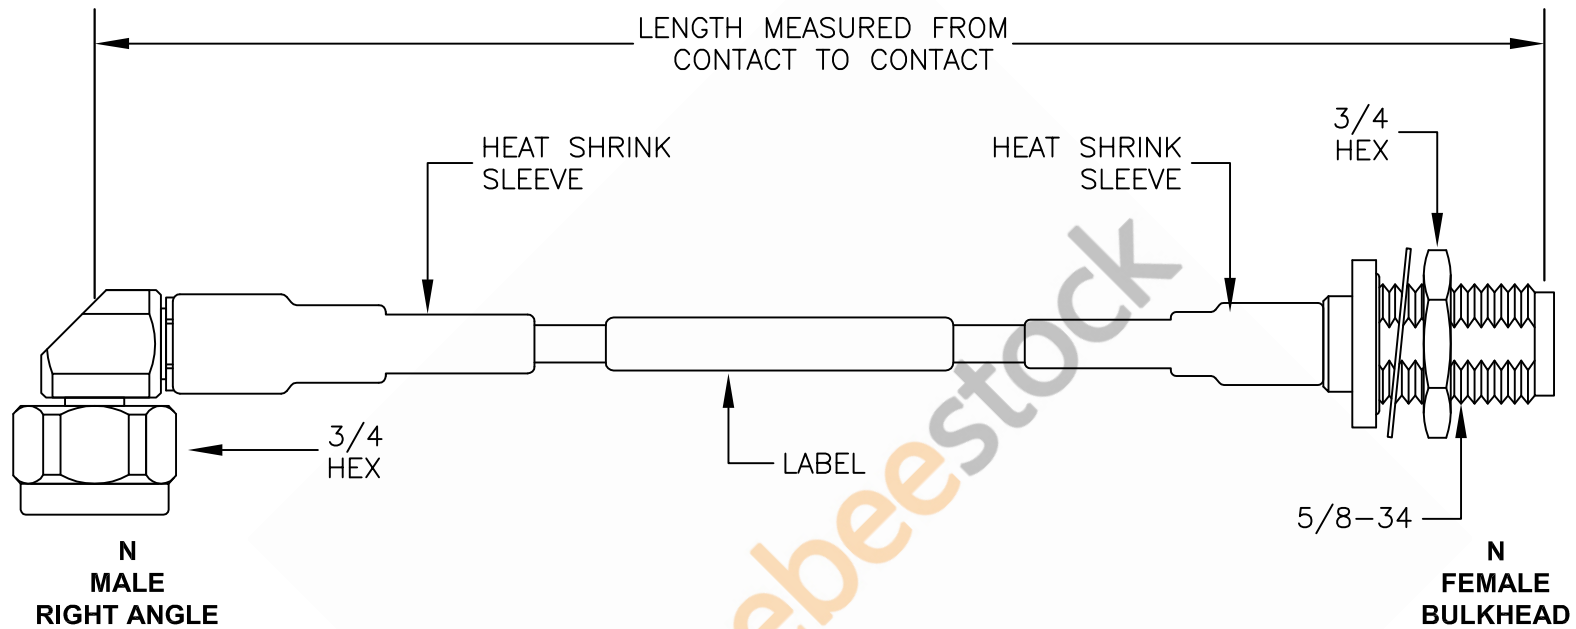

8TH FLOOR, BUILDING 1, YONGFU SCIENCE AND TECHNOLOGY
 CENTER INDUSTRIAL PARK, NANZHA DISTRICT 5,
 HUMEN, 523900, DONGGUAN, GUANGDONG, CHINA

WEBSITE: www.ebeestock.com
 EMAIL: sales@ebeestock.com

DWG TITLE

ET2848€

FSCM NO. 53919

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. LENGTH TOLERANCE IS $\pm 1.5\%$ OR $3/8"$, WHICHEVER IS GREATER.

CAD FILE 100914

SCALE N/A

SIZE A

150