



## RF Cable Assemblies Technical Data Sheet

ET28527

# Configuration


Connector 1: N Male

Connector 2: TNC Female Bulkhead

Cable Type: ET38353

#### Features

- 83% Velocity of Propagation
- Shielding effectiveness > 95 dB
- Maximum VSWR is < 1.40:1 to 18 GHz</li>
- Minimum Bend Radius of 1 inch
- Operating Temperature range of -55 to +125°C
- ROHS and REACH Compliant
- Same day shipment of custom lengths

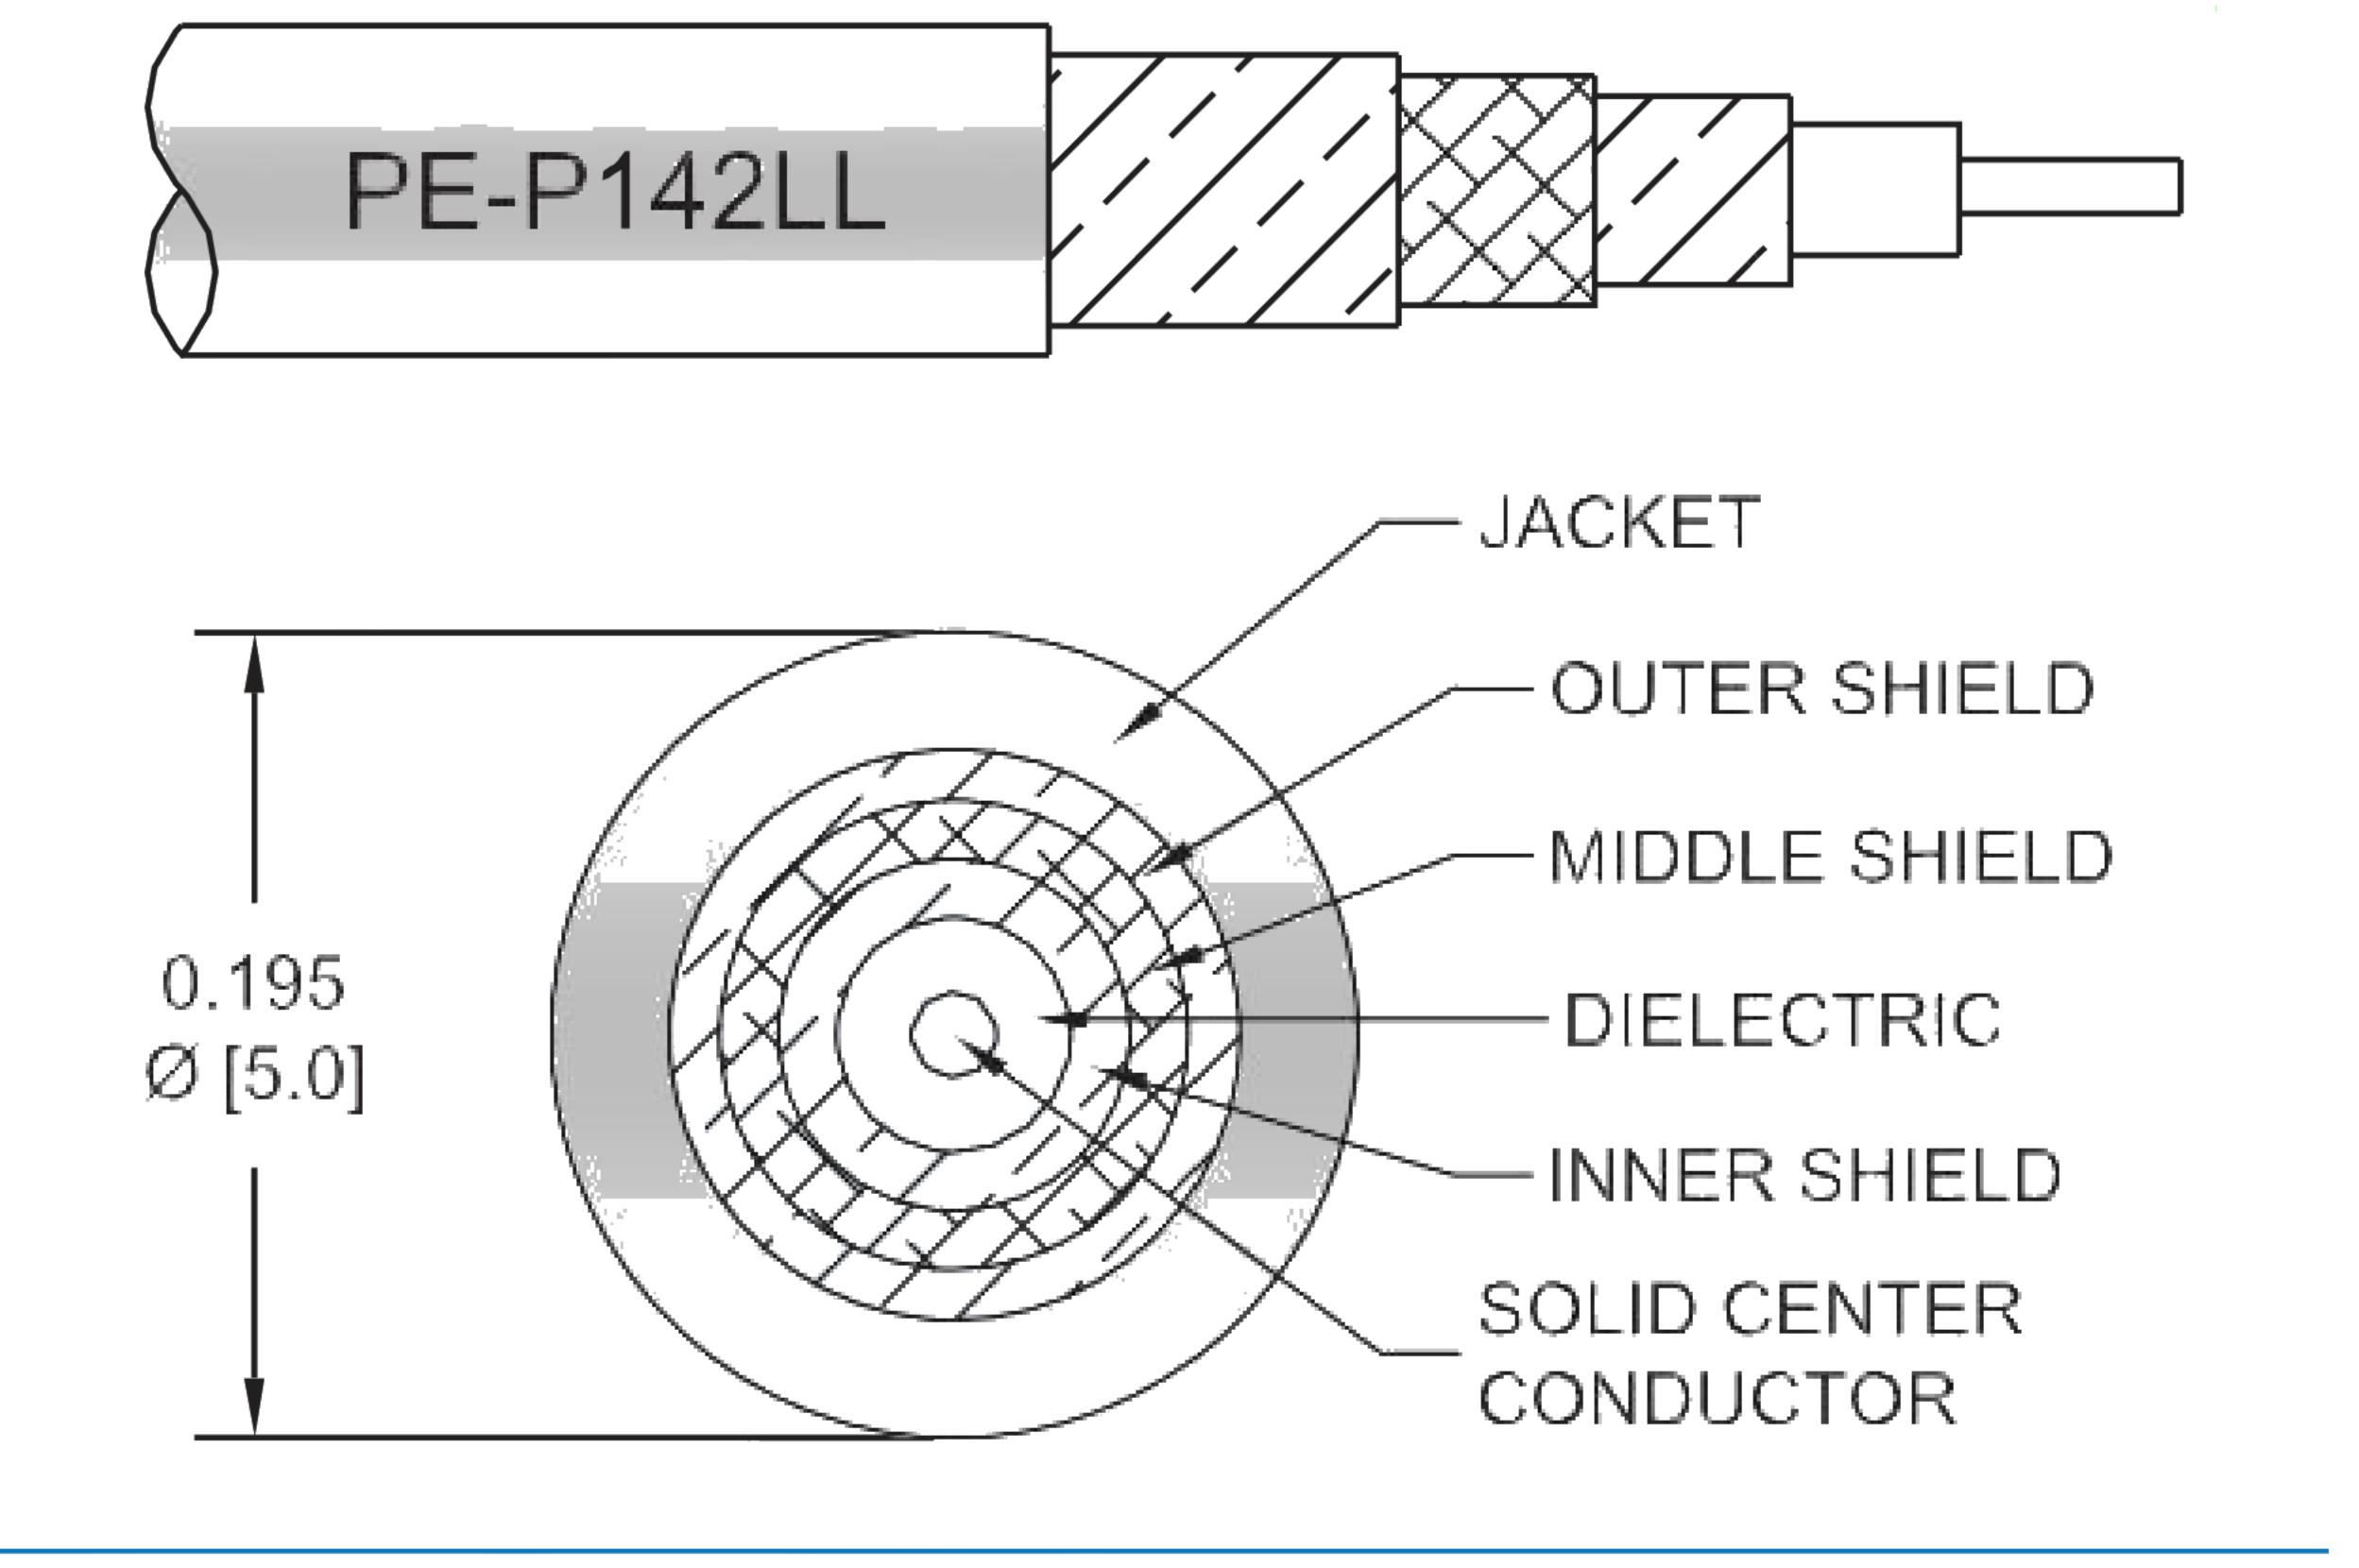

#### Description

The ET3C2276 series high performance test cable's 0.195 inch diameter and 83% phase velocity offer very low loss performance up to 18 GHz. The durable stainless steel connectors and FEP jacket provide a cost effective design ideal for test environments where a rugged cable assembly is required. The series is offered with Type N, TNC, and SMA connectors all rated to 18 GHz. A heavy duty boot provides improved strain relief and adds to the durability of the cable assemblies. These cable assemblies are built using a double shielded flexible cable, providing excellent shielding effectiveness of greater than 95 dB. All ET3C2276 cable assemblies are 100% Continuity, Hi-POT, and RF tested to published specifications. Custom lengths are built to order and shipped same day

#### **Electrical Specifications**

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
VSWR			1.4:1	
Return Loss	15.56			dB
Velocity of Propagation		83		%
RF Shielding	95			dB
Capacitance		25 [82.02]		pF/ft [pF/m]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: N Male to TNC Female Bulkhead Low Loss Cable 12 Inch Length Using ET38353 Coax, RoHS ET28527





# RF Cable Assemblies Technical Data Sheet

ET28527

#### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	1	2	4.5	9	18	GHz
Insertion Loss (Max.)	0.52	0.56	0.62	0.71	0.82	dB
Insertion Loss (Typ.)	0.49	0.52	0.58	0.65	0.75	dB

## Mechanical Specifications

Cable Assembly

Length 12 in [304.8 mm]
Weight 0.22 lbs [99.79 g]

Cable

Cable Type
Impedance
Inner Conductor Type
Solid
Copper Solid
Copper Solid

Inner Conductor Material and Plating

Copper, Silver

Dielectric Type

PTFE

Dielectric Type
Number of Shields
Shield Layer 1
Shield Layer 2
Shield Layer 3
Jacket Material

PTFE
Silver Plated Copper Tape
Aluminum Polyester
Silver Plated Copper Wire
FEP, Green

Jacket Diameter 0.195 in [4.95 mm]

One Time Minimum Bend Radius 1 in [25.4 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: N Male to TNC Female Bulkhead Low Loss Cable 12 Inch Length Using ET38353 Coax, RoHS ET28527





## RF Cable Assemblies Technical Data Sheet

ET28527

#### Connectors

Description	Connector 1	Connector 2
Type	N Male	TNC Female Bulkhead
Specification		MIL-STD-348
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Contact Plating Specification	ASTM-B488, 50µ Inch.	ASTM-B488, 50µ In. Minimum
Dielectric Type	PTFE	PEI
Outer Conductor Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel
Outer Conductor Plating Specification	SAE-AMS-2700	SAE-AMS-2700
Coupling Nut Material and Plating	Passivated Stainless Steel	
Coupling Nut Plating Specification	SAE-AMS-2700	
Hex Size	3/4 Inch	
Torque	14 in-lbs [1.58 Nm]	
Body Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel
Body Plating Specification		SAE-AMS-2700

# **Environmental Specifications**

Temperature

Operating Range -55 to +125 deg C

Compliance Certifications (visit for current document) RoHS Compliant

Yes

REACH Compliant 12/17/2015

## Plotted and Other Data

Notes:

Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: N Male to TNC Female Bulkhead Low Loss Cable 12 Inch Length Using ET38353 Coax, RoHS ET28527





# RF Cable Assemblies Technical Data Sheet

ET28527

#### How to Order

Part Number Configuration:

ET3C2276
- xx uu

——Unit of Measure:

cm = Centimeters

<br/>
<br/>
<br/>
<br/>
<br/>
Length

Base Number

Example: ET28527 = 12 inches long cable

ET3C2276-100cm = 100 cm long cable

N Male to TNC Female Bulkhead Low Loss Cable 12 Inch Length Using ET38353 Coax, RoHS from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: N Male to TNC Female Bulkhead Low Loss Cable 12 Inch Length Using ET38353 Coax, RoHS ET28527

**URL:** https://www.ebeestock.com/n-male-to-tnc-female-bulkhead-low-loss-cable-12-inch-length-usin g-pe-p142ll-coax-rohs-0028527

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

ET28527 CAD Drawing

N Male to TNC Female Bulkhead Low Loss Cable 12 Inch Length Using ET38353 Coax, RoHS

