

N Male Right Angle to TNC Male Low Loss Test Cable 60 Inch Length Using ET38354 Coax



RF Cable Assemblies Technical Data Sheet

ET28609


Configuration

• Connector 1: N Male Right Angle

Connector 2: TNC Male
Cable Type: ET38354

Features

- 83% Velocity of Propagation
- Shielding effectiveness > 95 dB
- Maximum VSWR is < 1.40:1 to 18 GHz
- Minimum Bend Radius of 1.5 inches
- Operating Temperature range of -55 to +125 °C
- ROHS Compliant
- Same day shipment of custom lengths
- 100% Continuity and RF tested

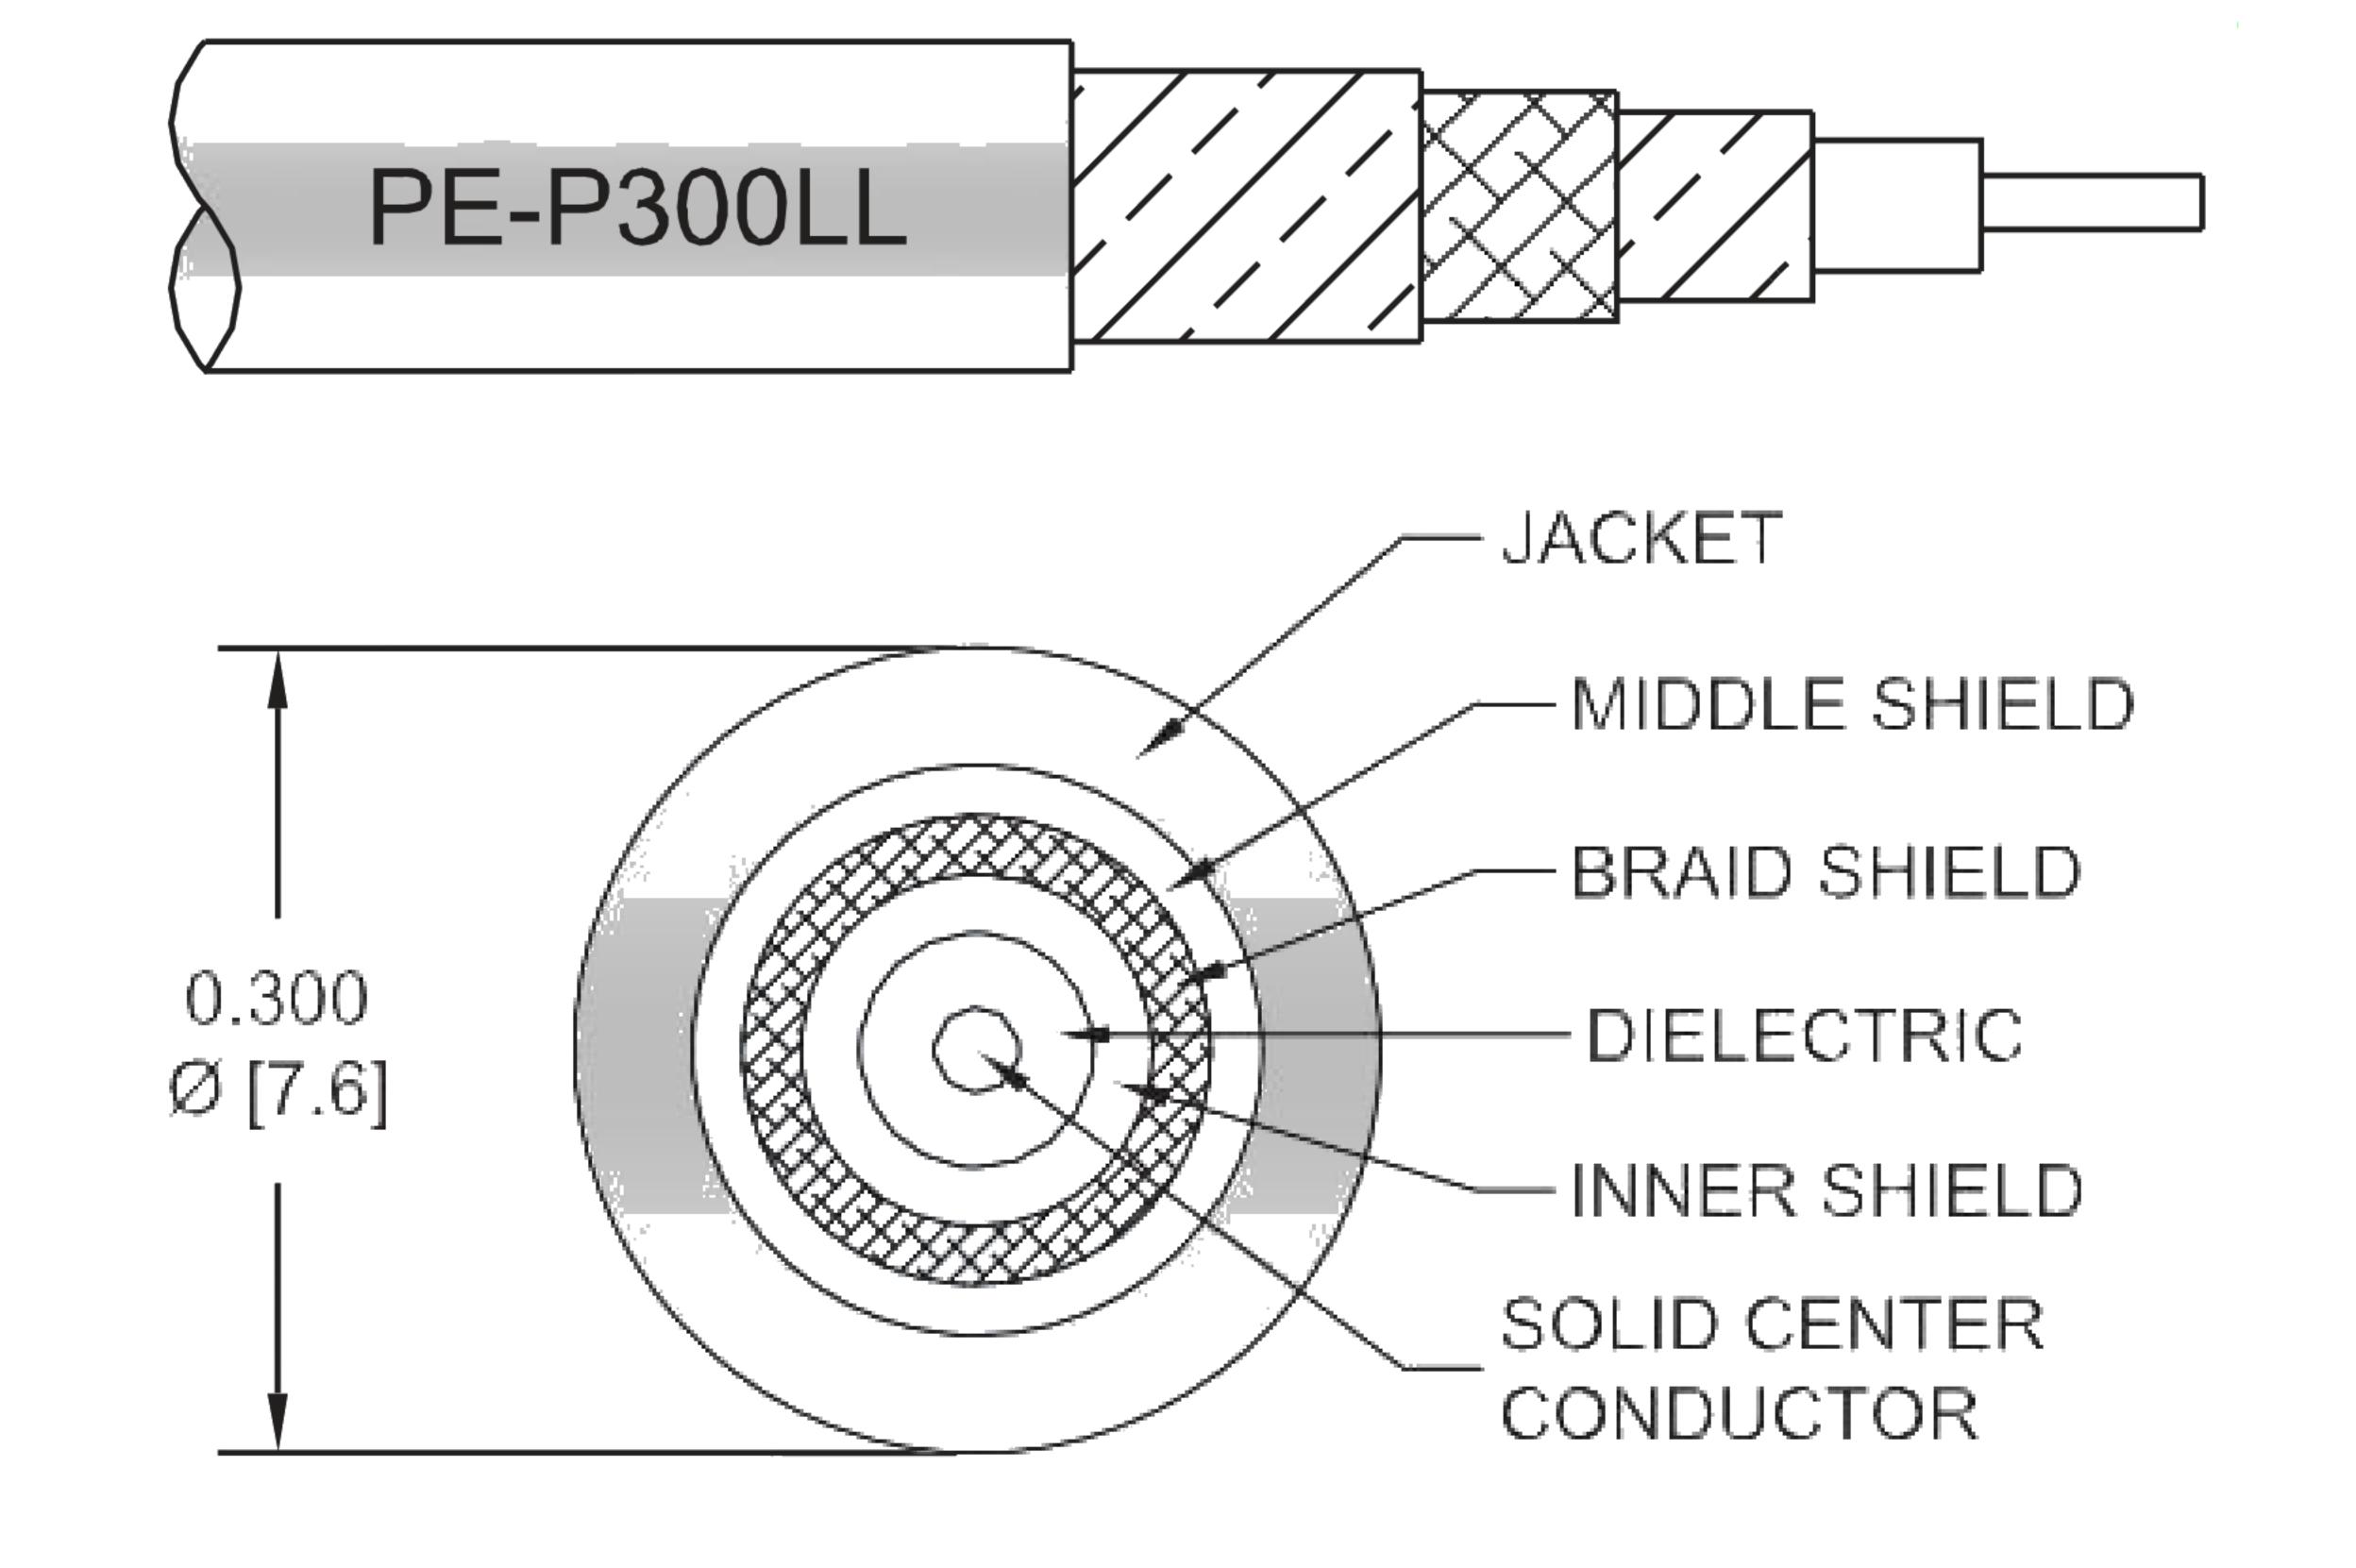

Description

The ET3C3243 high performance test cable's 0.3 inch diameter and 83% phase velocity offer very low loss performance up to 18 GHz. The durable stainless steel connectors and FEP jacket provide a cost effective design ideal for test environments where a rugged cable assembly is required. The series is offered with Type N, TNC, and SMA connectors all rated to 18 GHz. A heavy Duty boot provides improved strain relief and adds to the durability of the cable assemblies. These cable assemblies are built using a double shielded flexible cable, providing excellent shielding effectiveness of greater than 95 dB. All ET3C3243 cable assemblies are 100% Continuity and RF tested to published specifications. Custom lengths are built to order and shipped same day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
VSWR			1.4:1	
Velocity of Propagation		83		%
RF Shielding	95			dB
Capacitance		25 [82.02]		pF/ft [pF/m]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: N Male Right Angle to TNC Male Low Loss Test Cable 60 Inch Length Using ET38354 Coax, RoHS ET28609



N Male Right Angle to TNC Male Low Loss Test Cable 60 Inch L ength Using ET38354 Coax



RF Cable Assemblies Technical Data Sheet

ET28609

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	1	2	4.5	9	18	GHz
Insertion Loss (Max.)	0.5	0.6	0.8	1.1	1.5	dB
Insertion Loss (Typ.)	0.45	0.55	0.7	0.95	1.3	dB
Power Handling (Max.)	1,800	1,200	900	650	400	Watts

Mechanical Specifications

Repeated Minimum Bend Radius

Cable Assembly

 Length*
 60 in [152.4 cm]

 Diameter
 0.82 in [20.83 mm]

 Weight
 4.967 lbs [2.25 Kg]

Cable

Cable Type
Impedance
Inner Conductor Type
Inner Conductor Material and Plating

ET38354

50 Ohms

Solid
Copper, Silver

Dielectric Type

Number of Shields

Shield Layer 1

Shield Layer 2

Shield Layer 3

Silver Plated Copper Tape
Aluminum Polyester
Silver Plated Copper Wire
FEP, Green
Jacket Diameter

0.3 in [7.62 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: N Male Right Angle to TNC Male Low Loss Test Cable 60 Inch Length Using ET38354 Coax, RoHS ET28609

1.5 in [38.1 mm]



N Male Right Angle to TNC Male Low Loss Test Cable 60 Inch L ength Using ET38354 Coax



RF Cable Assemblies Technical Data Sheet

ET28609

Connectors

Description	Connector 1	Connector 2 TNC Male	
Туре	N Male Right Angle		
Specification		MIL-STD-348	
Impedance	50 Ohms	50 Ohms	
Mating Cycles		500	
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold over Nickel	
Contact Plating Specification	ASTM-B488	50 μin minimum	
Dielectric Type	PTFE	PTFE	
Body Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel	
Body Plating Specification	SAE-AMS-2700	SAE-AMS-2700	
Coupling Nut Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel	
Coupling Nut Plating Specification	SAE-AMS-2700	SAE-AMS-2700	
Hex Size		9/16 inch	
Torque		19 in-lbs [2.15 Nm]	

Mechanical Specification Notes:

Environmental Specifications

Temperature

Operating Range

-55 to +165 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: N Male Right Angle to TNC Male Low Loss Test Cable 60 Inch Length Using ET38354 Coax, RoHS ET28609

www.ebeestock.com

^{*}All cable assemblies have a length tolerance of 1.5% or ± 3/8", whichever is greater.



N Male Right Angle to TNC Male Low Loss Test Cable 60 Inch L ength Using ET38354 Coax



RF Cable Assemblies Technical Data Sheet

ET28609

How to Order

Part Number Configuration:

ET3C3243
- xx uu

——Unit of Measure:

cm = Centimeters

Example: ET3C3243-12 = 12 inches long cable

ET3C3243-100cm = 100 cm long cable

N Male Right Angle to TNC Male Low Loss Test Cable 60 Inch Length Using ET38354 Coax, RoHS from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: N Male Right Angle to TNC Male Low Loss Test Cable 60 Inch Length Using ET38354 Coax, RoHS ET28609

URL: https://www.ebeestock.com/n-male-right-angle-to-tnc-male-low-loss-test-cable-12-inch-lengt h-using-pe-p300ll-coax-0028605

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

ET28609 CAD Drawing

N Male Right Angle to TNC Male Low Loss Test Cable 60 Inch Length Using ET38354 Coax, RoHS

