



RF Cable Assemblies Technical Data Sheet

ET28649

Configuration

Connector 1: N Male Right Angle
Connector 2: N Male Right Angle

Cable Type: ET38365


Features

- Max Frequency 6 GHz
- Low PIM: -160 dBc Max
- Shielding Effectivity > 100 dB
- 76% Phase Velocity
- FEP Jacket
- PIM < -160 dBc
- 100% Tested with PIM Test Results Marked on Cable
- UL910 Plenum Rated Cable
- Lightweight and Extremely Flexible
- Low Loss with Excellent VSWR
- IP67 (when mated)

Applications

- General Purpose
- Laboratory Use
- Low PIM Applications
- Distributed Antenna Systems (DAS)
- Plenum Installations

SPP-250-LLPL

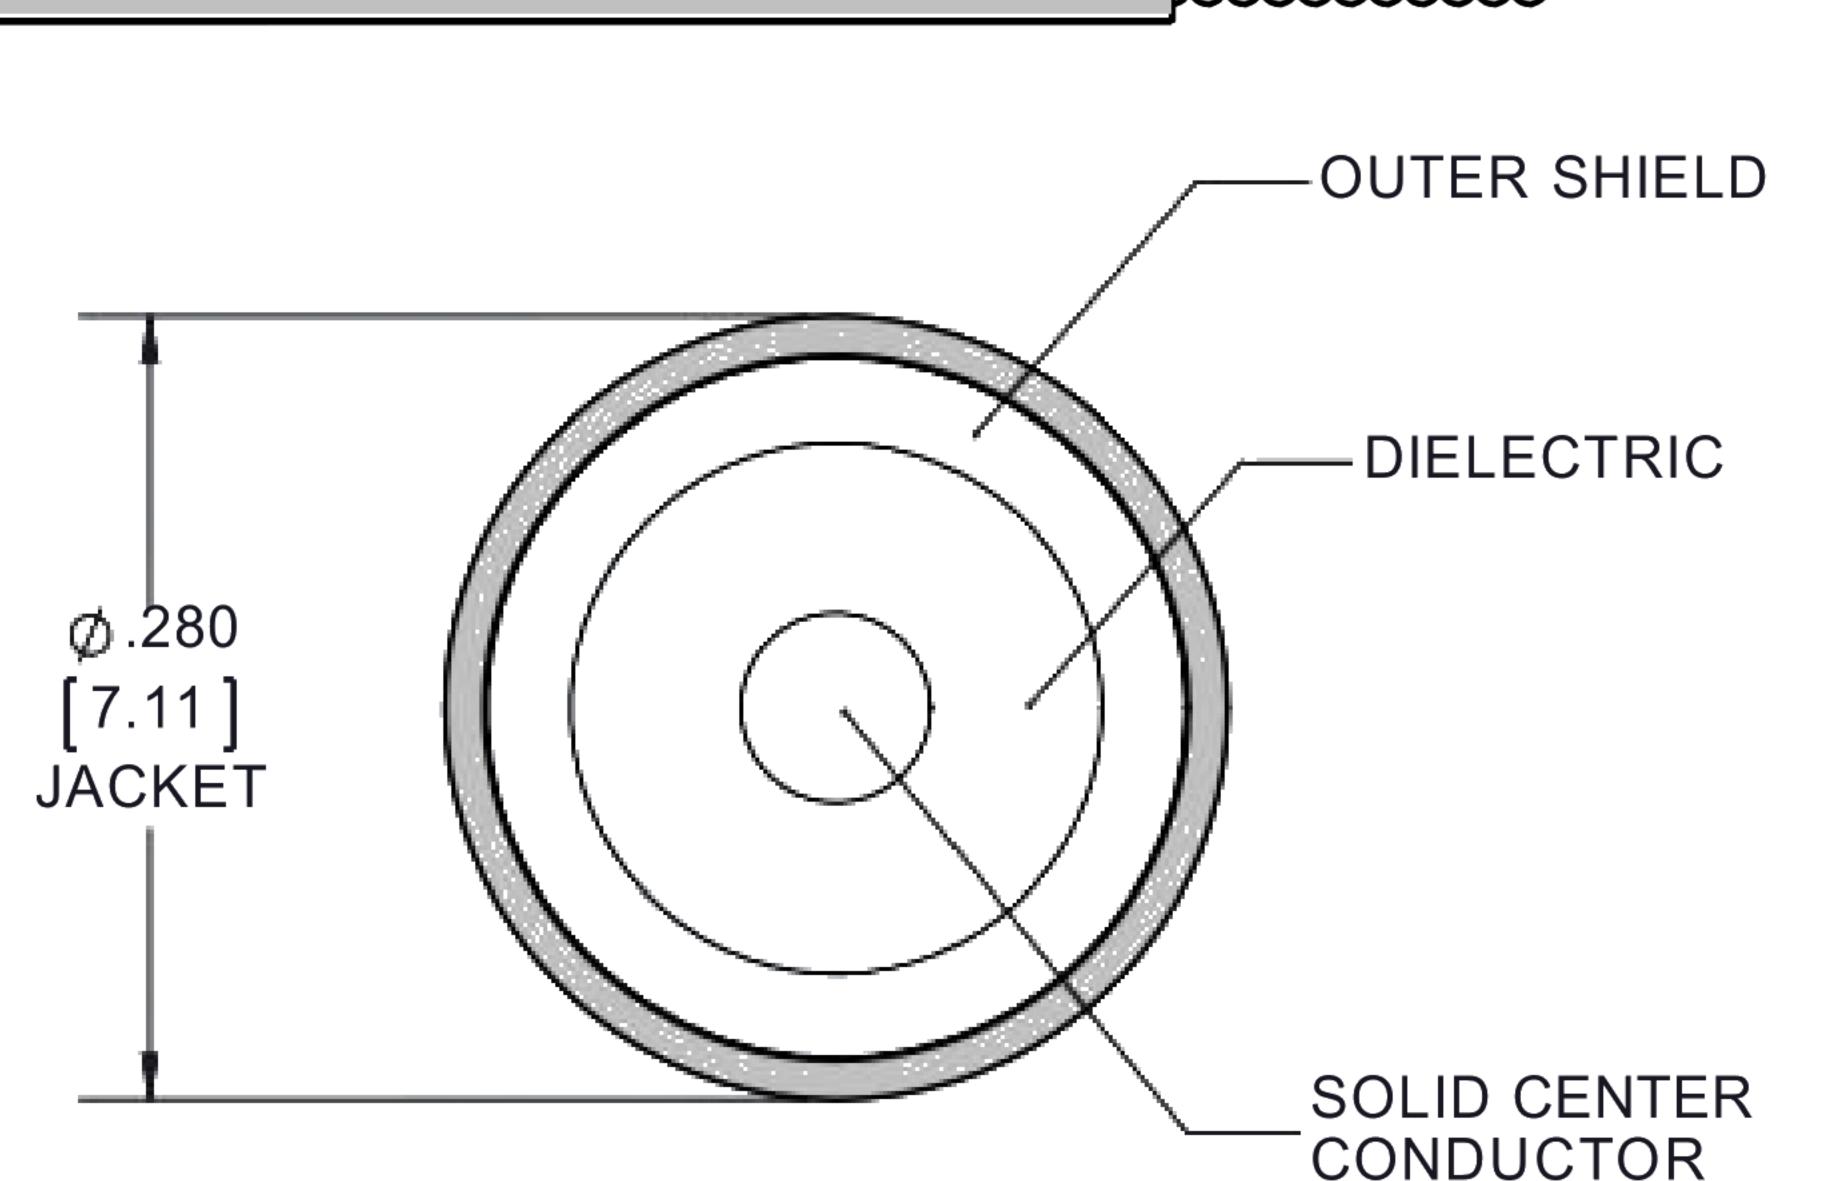

- Multi-Carrier Communication
 Systems
- PIM Testing

Description

Ebeestock's low PIM plenum cable assemblies using ET38365 coax and right angle N male to right angle N male connections are part of our full line of RF components available for same-day shipping. These right angle N male to right angle N male plenum coax cable assemblies deliver low PIM performance to support Distributed Antenna Systems (DAS) and other complex, multi-carrier communication systems. The ET38365 coax cable has been certified in accordance with UL910 for plenum coaxial cable installations. Each right angle N male to right angle N male cable assembly is 100% tested for Passive Intermodulation (PIM) and the tested value is marked directly on the cable.

Our right angle N male to right angle N male cable datasheet specifications and drawing with dimensions are shown below in this PDF. Whether the need is to provide a low PIM jumper connection, low PIM test cable or simply create a custom cable assembly configuration, Ebeestock has the right cable assemblies for the job.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Plenum N Male Right Angle to N Male RightAngle Low PIM Cable 12 Inch Length Using SPP-250-LLPL Coax, LF Solder ET28649





RF Cable Assemblies Technical Data Sheet

ET28649

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.35:1	
Velocity of Propagation		76		%
RF Shielding	100			dB
Passive Intermodulation		-165	-160	dBc
Capacitance		27 [88.58]		pF/ft [pF/m]
Inductance		0.067 [0.22]		uH/ft [uH/m]
Operating Voltage (AC)			750	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	5	1	2	4	6	GHz
Insertion Loss (Max.)	0.44	0.46	0.48	0.52	0.55	dB
VSWR (Max.)	1.25:1	1.25:1	1.25:1	1.35:1	1.35:1	

Electrical Specification Notes:

PIM test results vary between cables

The Insertion Loss data above is based on the performance specifications of the coax used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.4dB of connector loss.

Mechanical Specifications

Cable Assembly

Length* 12 in [304.8 mm] Diameter 0.28 in [7.11 mm]

Cable

Cable Type
Impedance
Inner Conductor Type
Inner Conductor Material and Plating

ET38365
50 Ohms
Solid
Copper, Bare

Shield Layer 1

Helically Corrugated Copper Tube

Outer Conductor Diameter 0.25 in [6.35 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Plenum N Male Right Angle to N Male RightAngle Low PIM Cable 12 Inch Length Using SPP-250-LLPL Coax, LF Solder ET28649

www.ebeestock.com





RF Cable Assemblies Technical Data Sheet

ET28649

Jacket Material FEP

Jacket Diameter 0.28 in [7.11 mm]

One Time Minimum Bend Radius 1.5 in [38.1 mm]

Connectors

Description	Connector 1	Connector 2	
Туре	N Male Right Angle	N Male Right Angle	
Impedance	50 Ohms	50 Ohms	
Contact Material and Plating	Brass, Silver	Brass, Silver	
Dielectric Type	PTFE	PTFE	
Body Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal	
Seal Gasket Material	Silicone Rubber	Silicone Rubber	

Mechanical Specification Notes:

Environmental Specifications

Temperature

Operating Range -55 to +200 deg C
Storage Range -55 to +200 deg C
Plenum Rating UL910

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Plenum N Male Right Angle to N Male RightAngle Low PIM Cable 12 Inch Length Using SPP-250-LLPL Coax, LF Solder ET28649

www.ebeestock.com


^{*}All cable assemblies have a length tolerance of 1.5% or ± 3/8", whichever is greater.





RF Cable Assemblies Technical Data Sheet

ET28649

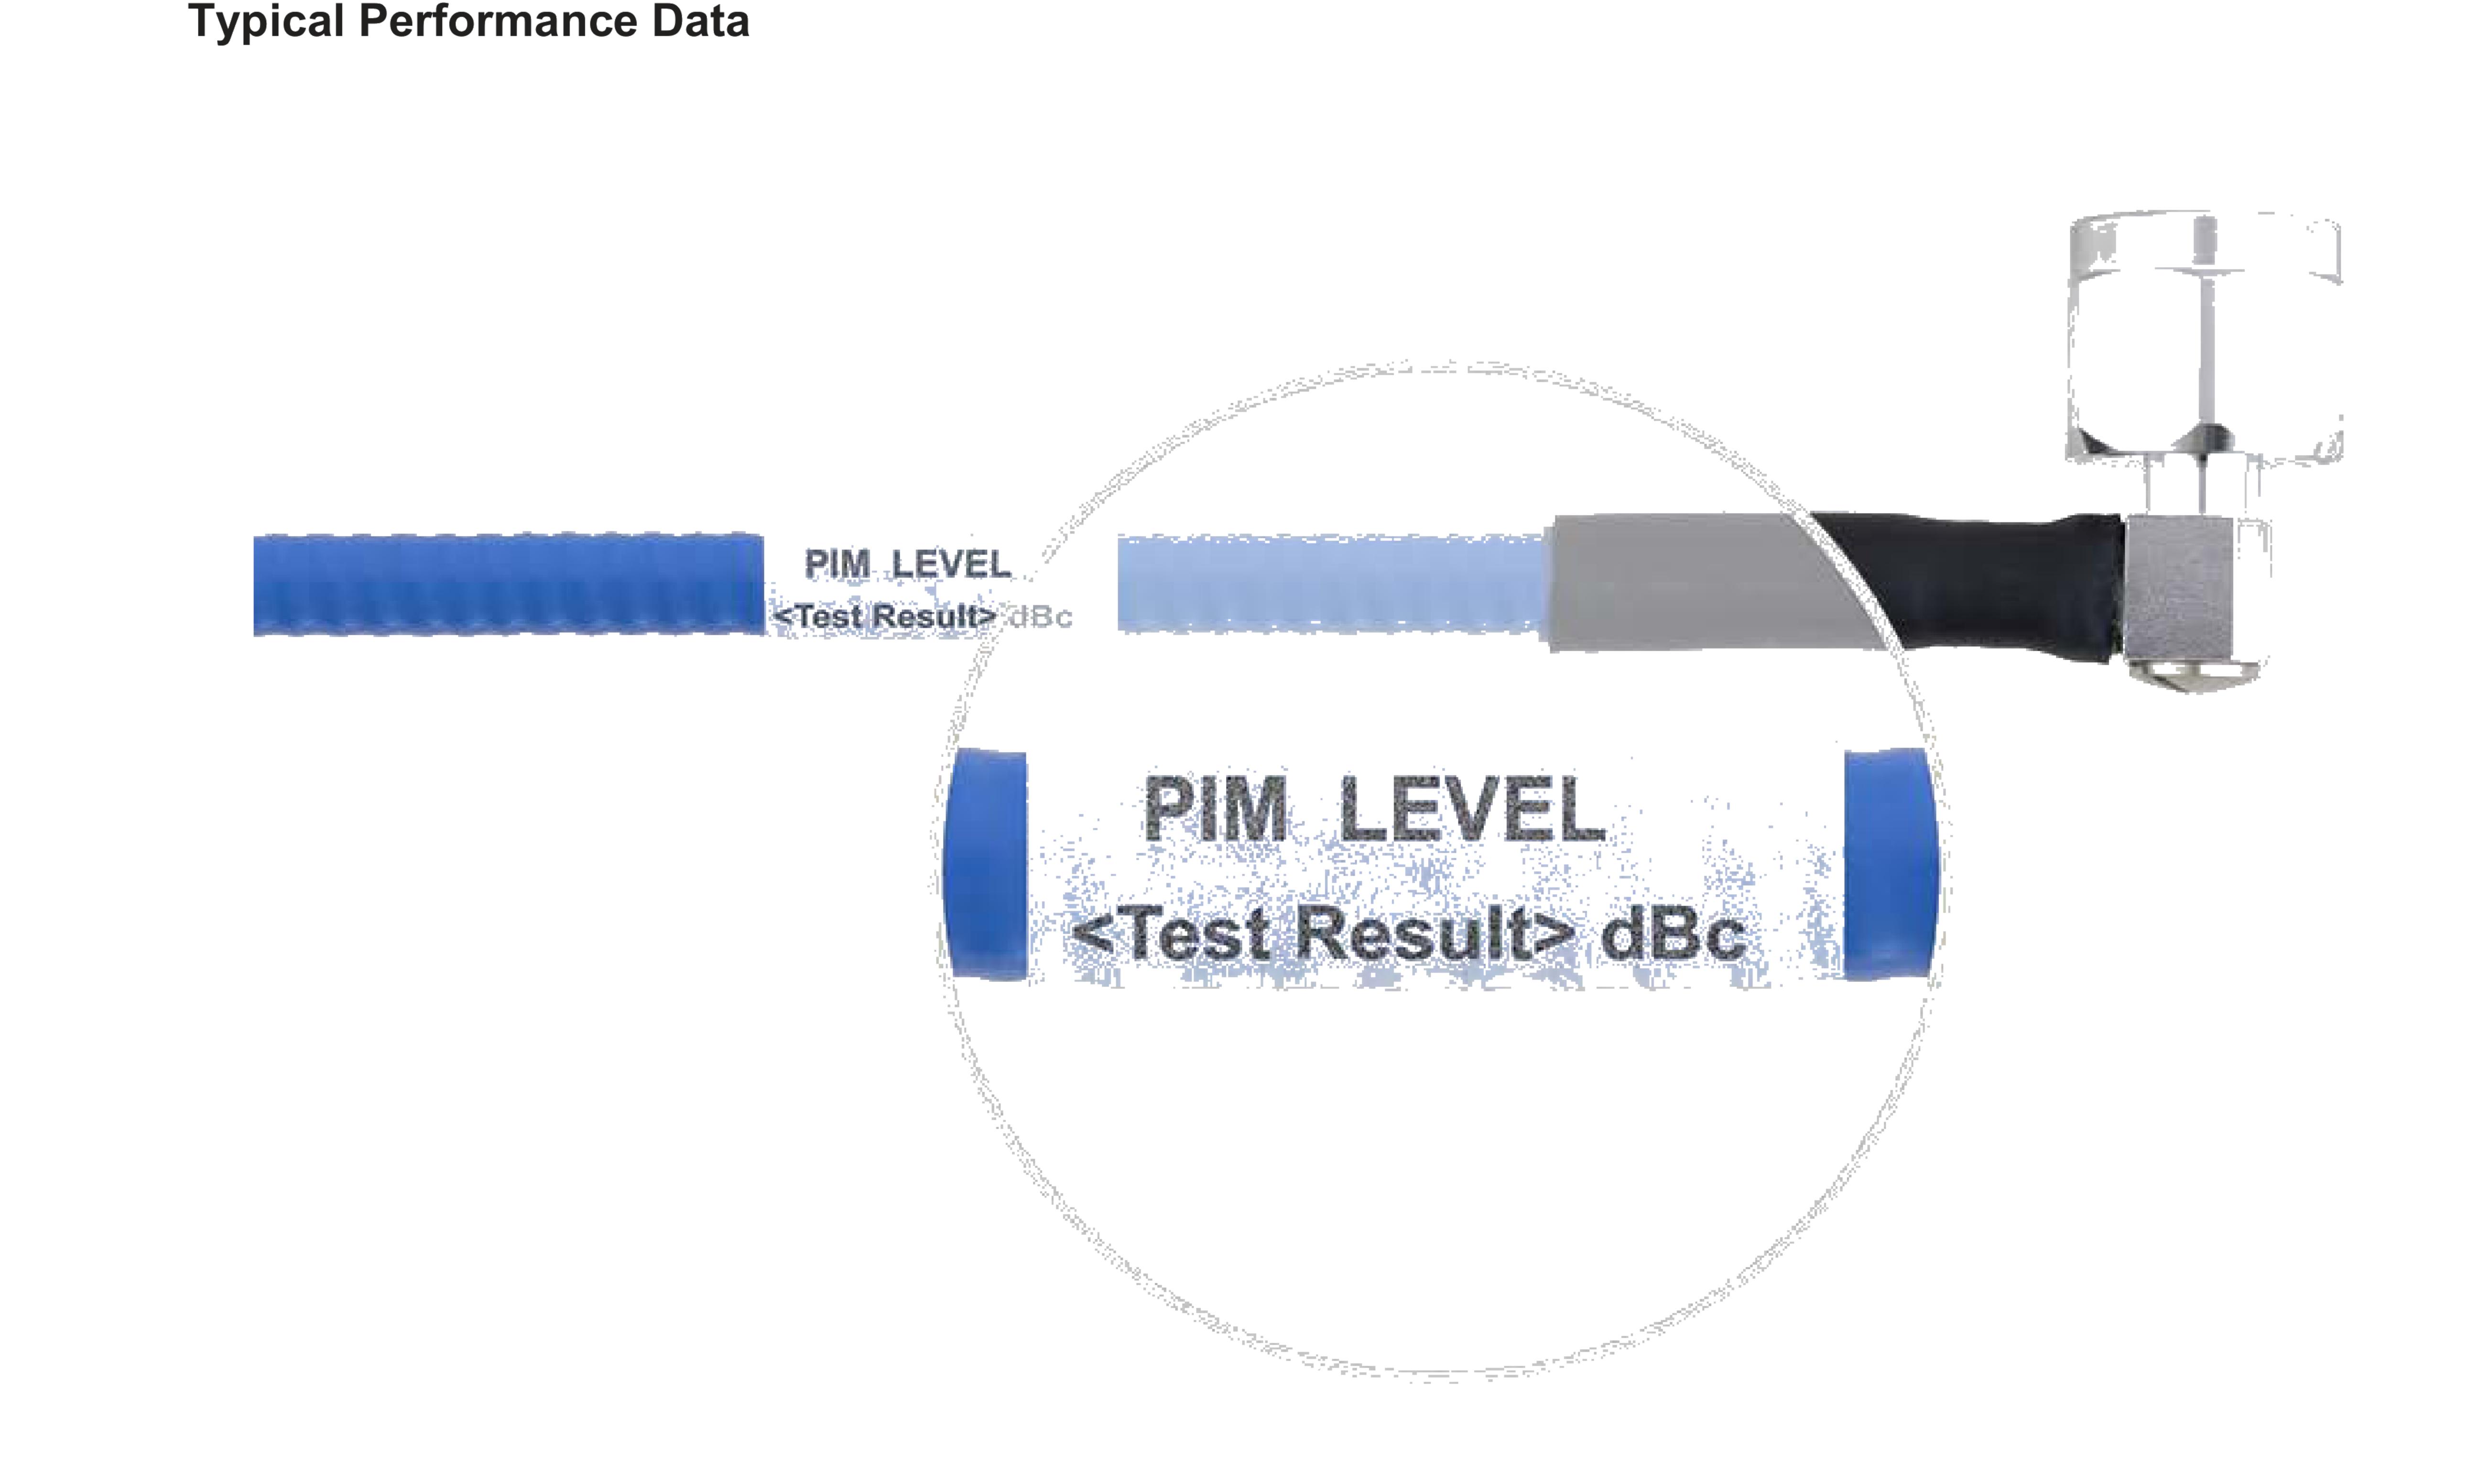

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Plenum N Male Right Angle to N Male RightAngle Low PIM Cable 12 Inch Length Using SPP-250-LLPL Coax, LF Solder ET28649





RF Cable Assemblies Technical Data Sheet

ET28649

How to Order

Part Number Configuration:

ET3C4145
- xx uu

——Unit of Measure:

cm = Centimeters

Length

Base Number

Example: ET28649 = 12 inches long cable

ET3C4145-100cm = 100 cm long cable

Plenum N Male Right Angle to N Male Right Angle Low PIM Cable 12 Inch Length Using ET38365 Coax, LF Solder from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Plenum N Male Right Angle to N Male RightAngle Low PIM Cable 12 Inch Length Using SPP-250-LLPL Coax, LF Solder ET28649

URL: https://www.ebeestock.com/plenum-n-male-right-angle-to-n-male-right-angle-low-pim-cable-12 -inch-length-using-spp-250-llpl-coax-lf-solder-0028649

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

