

MIL-DTL-17 N Male to N Female Cable 30 Inch Length Using M17 /84-ET-RG223 Coax



RF Cable Assemblies Technical Data Sheet

ET29190

Configuration

Connector 1: M39012/01-0503(N Male)
Connector 2: M39012/02-0503(N Female)

Cable: M17/84-ET-RG223

Features

- Max Frequency 11 GHz
- 65.9% Phase Velocity
- Double Shielded
- PVC Jacket
- Lot Traceability
- J-STD-Soldering
- Qualified (QPL) cable and connectors
- RF Test Plots
- Test Report
- In stock and ready to ship

MIL-DTL-17 Requirements

Applications

Hi-Rel

Avionics

• IFF

SATCOM

ECM

Description

Ebeestock's MIL-DTL-17 cable assemblies are part of our full line of reliable RF components available for same-day shipping. These commercial-off-the-shelf (COTS), military grade cable assemblies are designed and processed with high reliability in mind. MIL-PRF-39012 connectors and MIL-C-17 coaxial cable are assembled using J-STD soldering processes and WHMA-A-620 workmanship criteria. The combination of materials, processing and acceptance testing work together to create a dependable cable assembly for applications where performance over time is important or the cost of failure is high. Each finished MIL-DTL-17 cable assembly is traceable to its component lots and a test report is available for every lot produced.

Our MIL-DTL-17 cable assembly datasheet specifications and drawing with dimensions are shown below in this PDF. Ebeestock's broad catalog of RF, microwave and millimeter wave cable assemblies allow designers to configure and customize their signal connections however they like. Whether the need is to provide reliable mil-spec connections or fielding dependable RF cable assemblies, Ebeestock has the right cable assemblies for the job. Ebeestock can also expertly build your custom cable assemblies for you and ship same day.

Referenced Specifications

IPC/WHMA-Ā-620 Requirements and Acceptance for Cable and Wire Harness Assemblies
MIL-DTL-17 Cables, Radio Frequency, Flexible and Semirigid, General Specification for

MIL-STD-348 Radio Frequency Connector Interfaces for MIL-DTL-3643, MIL-DTL-3650, MIL-DTL-3655, MIL-

DTL-25516, MIL-PRF-31031, MIL-PRF-39012, MIL-PRF-49142, MIL-PRF...

MIL-PRF-39012 Connectors, Coaxial, Radio Frequency, General Specification for IPC J-STD-001 Requirements for Soldered Electrical and Electronic Assemblies

IPC J-STD-006 Requirements for Electronic Grade Solder Alloys and Fluxed and Non-Fluxed Solid Solders for

Electronic Soldering Applications

SAE AS5942 Marking of Electrical Insulating Materials

SAE AS23053 Insulation Sleeving, Electrical, Heat Shrinkable, General Specifications For

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: MIL-DTL-17 N Male to N Female Cable 30 Inch Length Using M17/84-ET-RG223 Coax ET29190



MIL-DTL-17 N Male to N Female Cable 30 Inch Length Using M17 /84-ET-RG223 Coax



RF Cable Assemblies Technical Data Sheet

ET29190

SAE AS22520

Crimping Tools, Wire Termination, General Specification For

Material Specifications

| Component | Specification |
|---------------|---|
| Cable | M17/84-ET-RG223 in accordance with MIL-DTL-17 |
| Connector 1 | M39012/01-0503 in accordance with MIL-PRF-39012 |
| Connector 2 | M39012/02-0503 in accordance with MIL-PRF-39012 |
| Heat Shrink 1 | M23053/5-106-0 in accordance with SAE AS23053 |
| Heat Shrink 2 | M23053/5-106-0 in accordance with SAE AS23053 |
| Solder | SN63 in accordance with J-STD-006 |

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|--------------------------------------|---------|---------------|---------|-----------------|
| Frequency Range | DC | | 11 | GHz |
| VSWR | | | 1.7:1 | |
| Velocity of Propagation | | 65.9 | | % |
| Capacitance | | 32.2 [105.64] | | pF/ft [pF/m] |
| DC Resistance Inner Conductor | | 0.9 [2.95] | | Ω/1000ft [Ω/Km] |
| Dielectric Withstanding Voltage (AC) | | | 1,500 | Vrms |

Specifications by Frequency

| Description | F1 | F2 | F3 | F4 | F5 | Units |
|-----------------------|------|-----|------|------|------|-------|
| Frequency | 0.05 | 0.4 | 1 | 5 | 11 | GHz |
| Insertion Loss (Max.) | 0.32 | 0.5 | 0.73 | 1.58 | 2.33 | dB |

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1 dB for the connectors.

Mechanical Specifications

Cable Assembly

| Description | Minimum | Typical | Maximum | Units |
|----------------------|----------|----------|------------|---------|
| Length* | 30 [762] | 30 [762] | 31 [787.4] | in [mm] |
| Cable Outer Diameter | 0.208 | 0.212 | 0.216 | in |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: MIL-DTL-17 N Male to N Female Cable 30 Inch Length Using M17/84-ET-RG223 Coax ET29190



MIL-DTL-17 N Male to N Female Cable 30 Inch Length Using M17 /84-ET-RG223 Coax



RF Cable Assemblies Technical Data Sheet

ET29190

| Weight | 0.3 [136.08] | lbs [g] |
|--------|--------------|---------|
|--------|--------------|---------|

^{*}Length Tolerances: +0.5, -0 inches for Length ≤ 1 foot; +1, -0 inches for Length >1 to 5 feet; +2, -0 inches for Length >5 to 10 feet; +3, -0 inches for Length >10 to 25 feet and +2%, -0 inches for Length >25 feet.

Cable Characteristics

| Specification | |
|--------------------|--|
| M17/84-ET-RG223 | |
| 50 Ohms | |
| Solid | |
| Silver Clad Copper | |
| PE | |
| 2 | |
| Silver Clad Copper | |
| Silver Clad Copper | |
| 0.176 in [4.47 mm] | |
| PVC | |
| | M17/84-ET-RG223 50 Ohms Solid Silver Clad Copper PE 2 Silver Clad Copper Silver Clad Copper O.176 in [4.47 mm] |

Connector Characteristics

| Description | Connector 1 | Connector 2 |
|---------------------------------------|-----------------|-----------------------|
| Туре | N Male | N Female |
| Specification | MIL-PRF-39012 | MIL-PRF-39012 |
| Impedance | 50 Ohms | 50 Ohms |
| Contact Material and Plating | Brass, Gold | Phosphor Bronze, Gold |
| Contact Plating Specification | MIL-G-45204 | MIL-G-45204 |
| Dielectric Type | Teflon | Teflon |
| Outer Conductor Material and Plating | | Brass, Silver |
| Outer Conductor Plating Specification | | QQ-S-365 |
| Body Material and Plating | Brass, Silver | Brass, Silver |
| Body Plating Specification | QQ-S-365 | QQ-S-365 |
| Seal Gasket Material | Silicone Rubber | |
| Contact Gage Specification | 0.210 in min | 0.187 to 0.207 in |

Mechanical Specification Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: MIL-DTL-17 N Male to N Female Cable 30 Inch Length Using M17/84-ET-RG223 Coax ET29190

www.ebeestock.com



MIL-DTL-17 N Male to N Female Cable 30 Inch Length Using M17 /84-ET-RG223 Coax



RF Cable Assemblies Technical Data Sheet

ET29190

Environmental Specifications

| Description | Specification | |
|-----------------------------|------------------|--|
| Temperature Operating Range | -40 to +85 deg C | |
| | | |

Compliance Certifications (see product page for current document)

Process Specifications

| Process | Specification |
|-------------|---|
| Soldering | in accordance with J-STD-001, class3 |
| Crimping | dies in accordance with SAE AS22520 |
| Marking | shall meet the adherence requirements of SAE AS5942 |
| Workmanship | shall be in accordance with IPC/WHMA-A-620, class 3 |

Tests and Inspections

| Description | Sampling |
|--|-------------|
| Connector Gaging (pin and insulator position) | 100% |
| Insertion Loss | 100% |
| VSWR | 100% |
| Dielectric Withstanding Voltage (DWV) | 100% |
| Visual -workmanship, configuration and marking | 100% |
| Length | C=0, 1.5AQL |
| Mass | C=0, 1.5AQL |
| | |

Plotted and Other Data

Notes:

Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: MIL-DTL-17 N Male to N Female Cable 30 Inch Length Using M17/84-ET-RG223 Coax ET29190



MIL-DTL-17 N Male to N Female Cable 30 Inch Length Using M17 /84-ET-RG223 Coax



RF Cable Assemblies Technical Data Sheet

ET29190

How to Order

ET3M0037 Part Number Configuration: - XX -Unit of Measure: cm = Centimeters <black> = Inches Length Base Number

ET3M0037-12 = 12 inches long cable Example:

ET3M0037-100cm = 100 cm long cable


MIL-DTL-17 N Male to N Female Cable 30 Inch Length Using M17/84-ET-RG223 Coax from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: MIL-DTL-17 N Male to N Female Cable 30 Inch Length Using M17/84-ET-RG223 Coax ET3M0037-30

URL: https://www.ebeestock.com/mil-dtl-17-n-male-to-n-female-cable-12-inch-length-using-m17-84rg223-coax-0029187

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

www.ebeestock.com

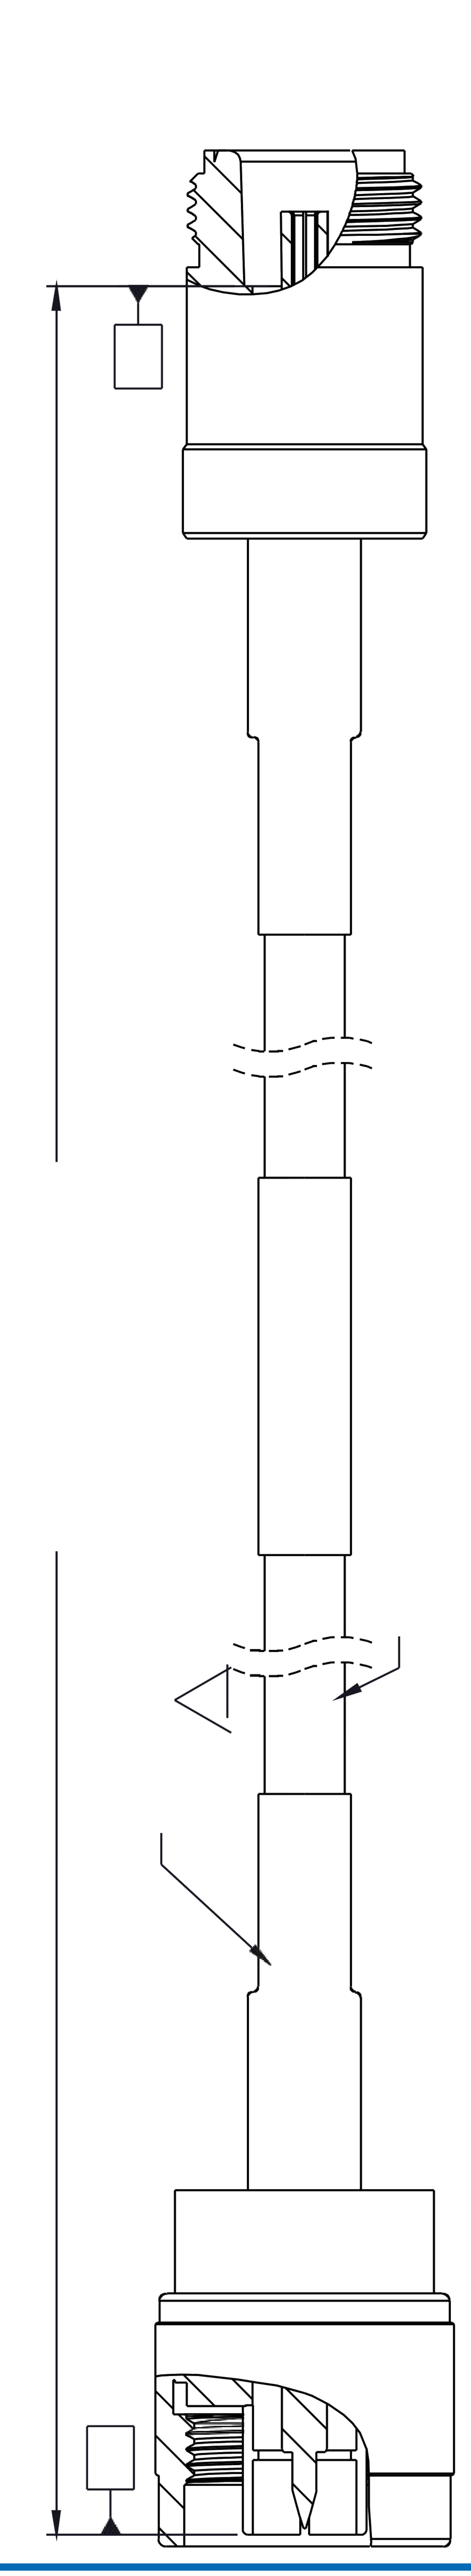

CAGE CODE 53919

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.

2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTIC

3. DIMENSIONS ARE IN INCHES [mm].

CAGE CODE 53919

CAD FILE

SCALE N/A

SIZE A

ebeestock Freezestock

INCF

8th Floor, Building 1, Yongfu Science
and Technology Center Industrial Park,
ha District 5, Humen,523900, Dongguan, Guangdong, China.

ebstie: www.ebeestock.com Email: sales@ebeestock.com