



RF Cable Assemblies Technical Data Sheet

ET29731


Configuration

• Connector 1: QMA Male Right Angle

Connector 2: SMA Male
Cable Type: ET38380

Features

- Max Frequency 4 GHz
- Shielding Effectivity > 90 dB
- 80% Phase Velocity
- Double Shielded
- PE Jacket

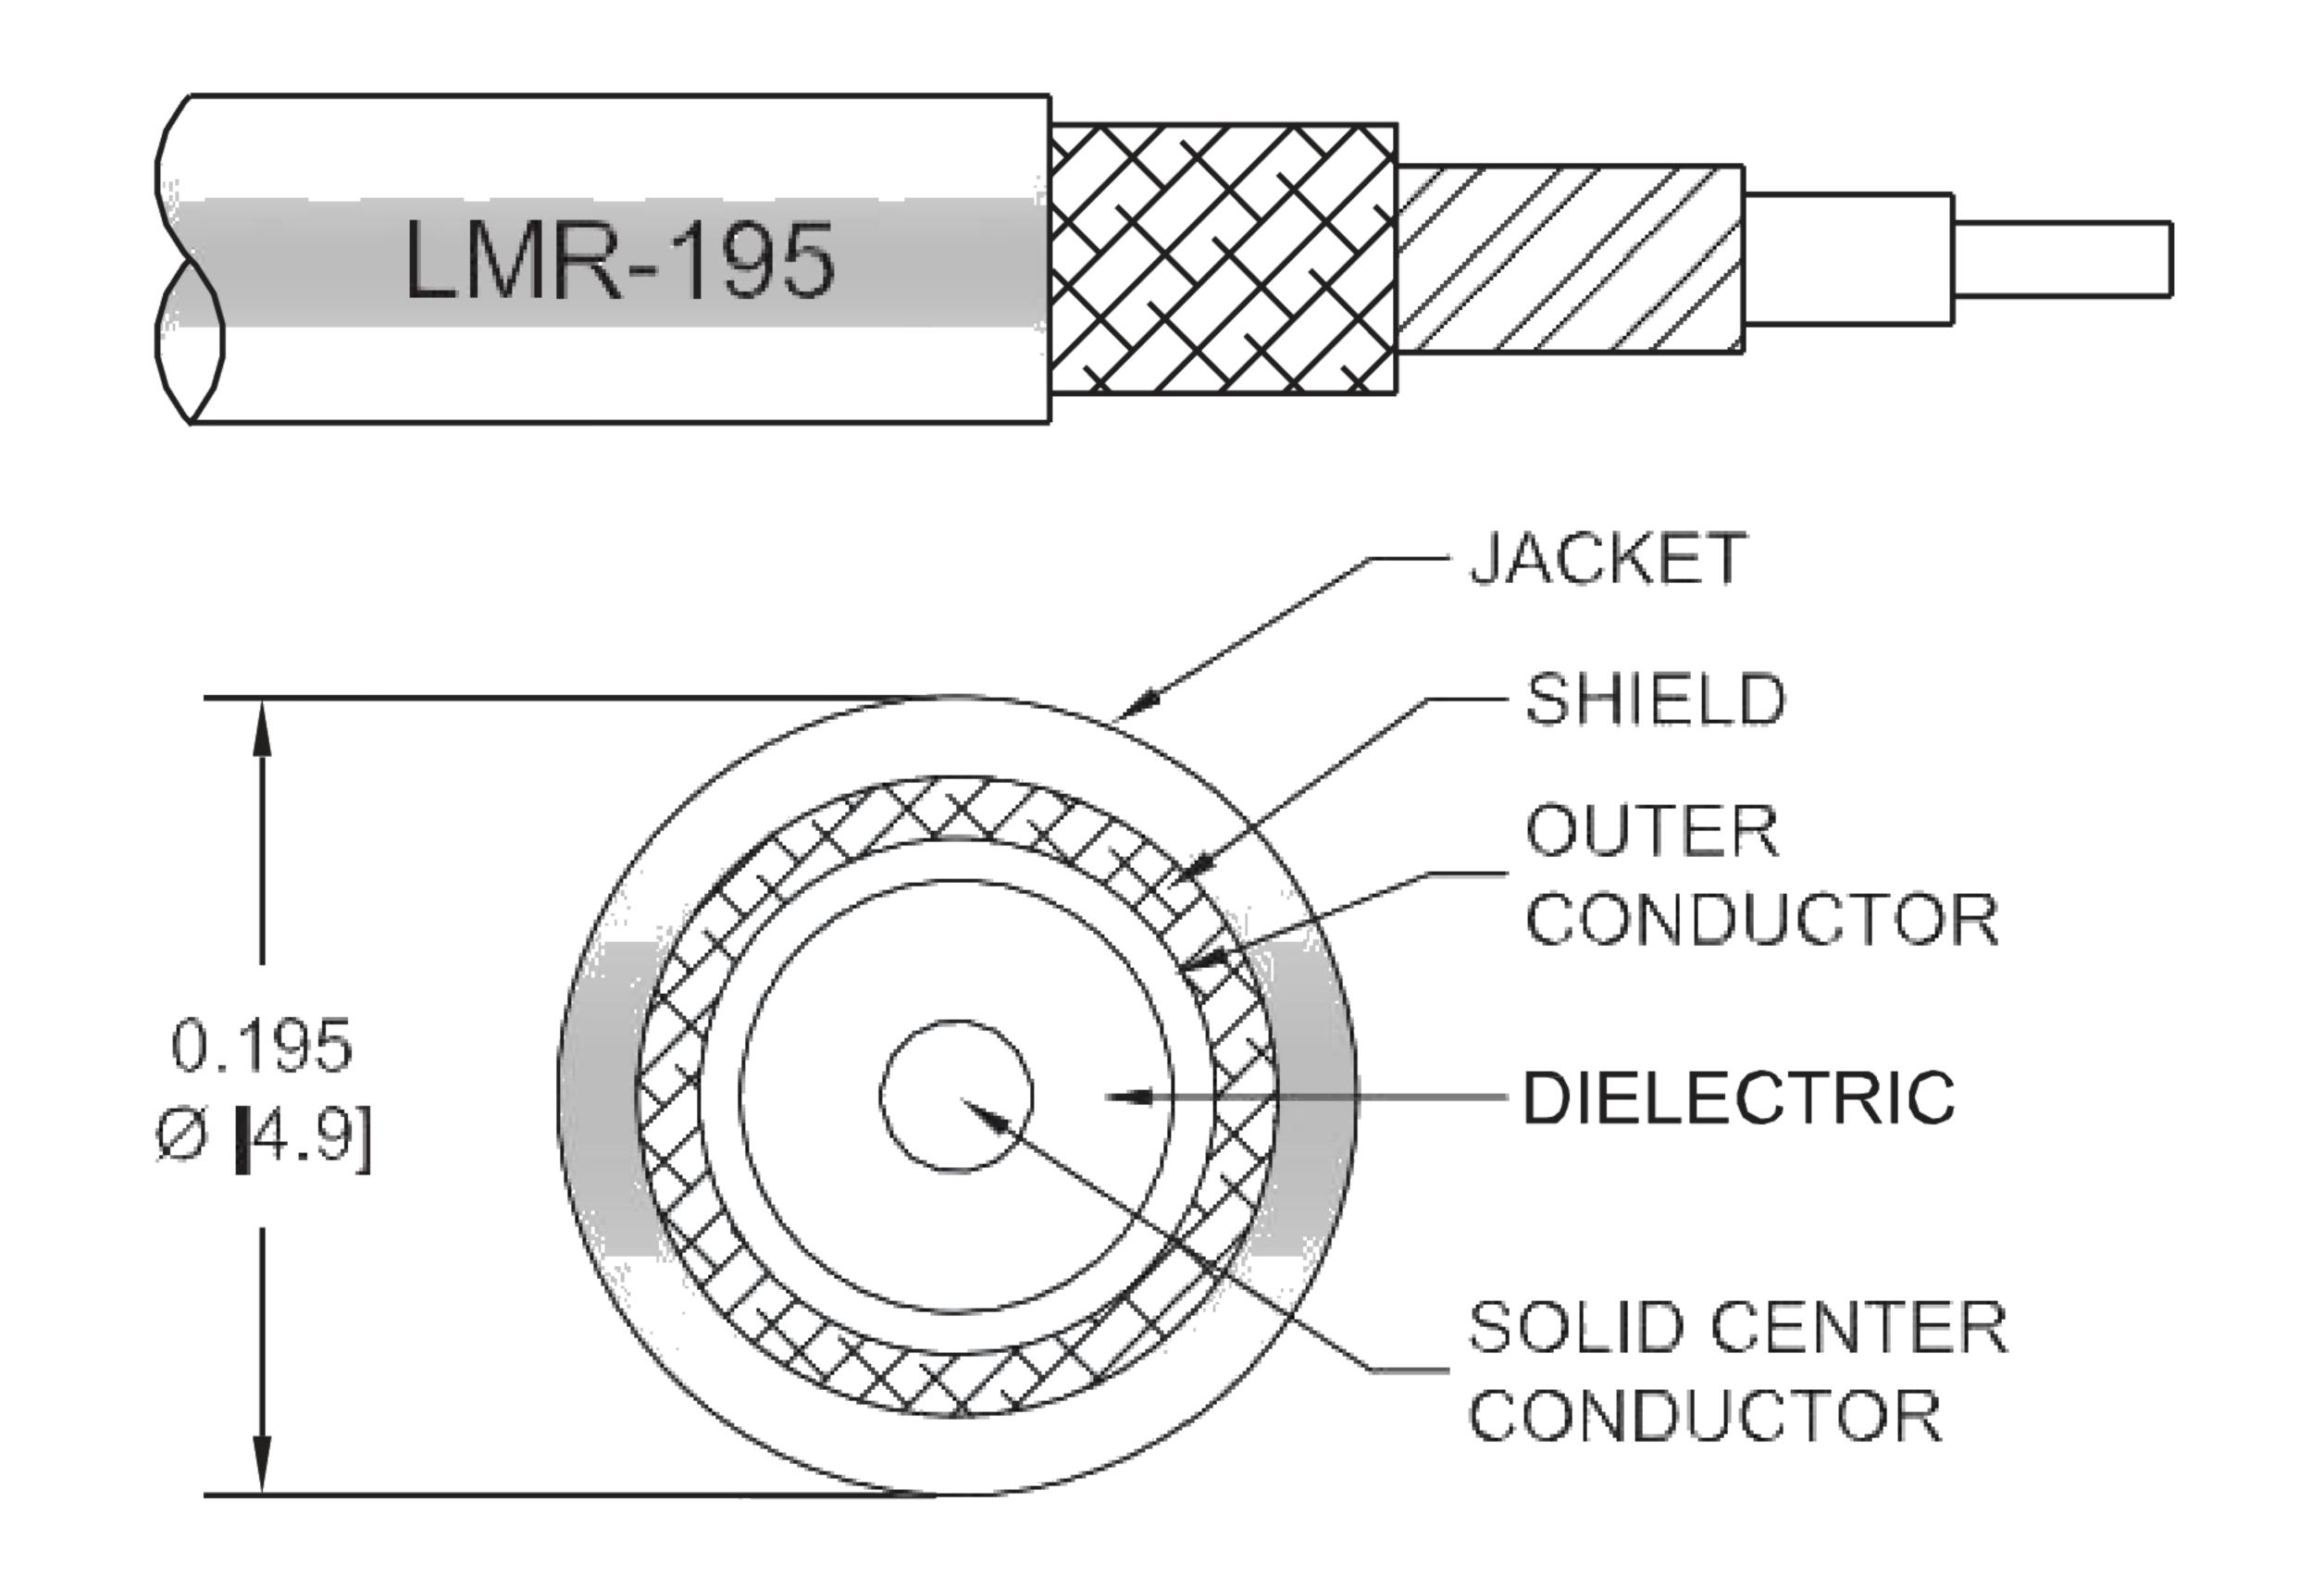

Applications

General Purpose

Laboratory Use

Description

Ebeestock's ET29731 QMA male right angle to SMA male 50 cm cable using ET38380 coax is part of our full line of RF components available for same-day shipping. Ebeestock's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Ebeestock QMA to SMA cable assembly has a male to male gender configuration with 50 ohm flexible ET38380 coax. The ET29731 QMA male to SMA male cable assembly operates to 4 GHz. The right angle QMA interface on the ET38380 cable allows for easier connections in tight spaces. The double shielding of this Ebeestock cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: QMA Male Right Angle to SMA Male Cable 50 cm Length Using ET38380 Coax ET29731

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.





RF Cable Assemblies Technical Data Sheet

ET29731

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		4	GHz
VSWR			1.5:1	
Velocity of Propagation		80		%
RF Shielding	90			dB
Group Delay		1.27 [4.17]		ns/ft [ns/m]
Capacitance		25.4 [83.33]		pF/ft [pF/m]
Inductance		0.064 [0.21]		uH/ft [uH/m]
DC Resistance Inner Conductor		7.6 [24.93]		Ohms/1000ft [Ohms/
Km]				
DC Resistance Outer Conductor		4.9 [16.08]		Ohms/1000ft [Ohms/
Km]				
Jacket Spark			3,000	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	4	GHz
Insertion Loss (Max.)	0.4	0.44	0.49	0.62	0.7	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.3dB of connector loss.

Mechanical Specifications

Cable Assembly

Length* 19.68 in [499.87 mm] Diameter 0.41 in [10.41 mm]

Cable

Cable Type
Impedance
Inner Conductor Type
Inner Conductor Material and Plating
Dielectric Type
Number of Shields

ET38380
50 Ohms
Copper
PE (F)

Shield Layer 1
Shield Layer 2
Aluminum Tape
Tinned Copper Braid

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: QMA Male Right Angle to SMA Male Cable 50 cm Length Using ET38380 Coax ET29731

www.ebeestock.com

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.





RF Cable Assemblies Technical Data Sheet

ET29731

Jacket Material

Jacket Diameter

0.195 in [4.95 mm]

PE, Black

One Time Minimum Bend Radius Repeated Minimum Bend Radius Bending Moment Flat Plate Crush 0.5 in [12.7 mm]
2 in [50.8 mm]
0.2 lbs-ft [0.27 N-m]
15 lbs/in [0.27 Kg/mm]
40 lbs [18.14 Kg]

Connectors

Tensile Strength

Connector 1	Connector 2 SMA Male		
QMA Male Right Angle			
50 Ohms	50 Ohms		
Phosphor Bronze, Gold	Brass, Gold		
	ASTM B488		
PTFE	Teflon		
Phosphor Bronze, Tri-Metal			
Brass, Tri-Metal	Passivated Stainless Steel		
	Passivated Stainless Steel		
	5/16 Inch		
	QMA Male Right Angle 50 Ohms Phosphor Bronze, Gold PTFE Phosphor Bronze, Tri-Metal		

Mechanical Specification Notes:

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: QMA Male Right Angle to SMA Male Cable 50 cm Length Using ET38380 Coax ET29731

^{*}All cable assemblies have a length tolerance of 1.5% or ± 3/8", whichever is greater.





RF Cable Assemblies Technical Data Sheet

ET29731

How to Order

Part Number Configuration:

ET3W06662
- xx uu

Unit of Measure:

cm = Centimeters

chlank> = Inches

Base Number

Example: ET3W06662-12 = 12 inches long cable

ET3W06662-100cm = 100 cm long cable

QMA Male Right Angle to SMA Male Cable 50 cm Length Using ET38380 Coax from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: QMA Male Right Angle to SMA Male Cable 50 cm Length Using ET38380 Coax ET3W06662-50CM

URL: https://www.ebeestock.com/qma-male-right-angle-to-sma-male-cable-12-inch-length-using-lmr-195-coax-0029726

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.

