


| COMPONENTS           | IMPEDANCE |
|----------------------|-----------|
| SMB PLUG             | 50 OHM    |
| SMB PLUG RIGHT ANGLE | 50 OHM    |
|                      |           |
|                      |           |

| Standard Lengths |                         |
|------------------|-------------------------|
| -12              | 12"                     |
| -24              | 24"                     |
| -36              | 36"                     |
| -48              | 48"                     |
| -60              | 60"                     |
| -XXX             | Custom Length in inches |
|                  |                         |

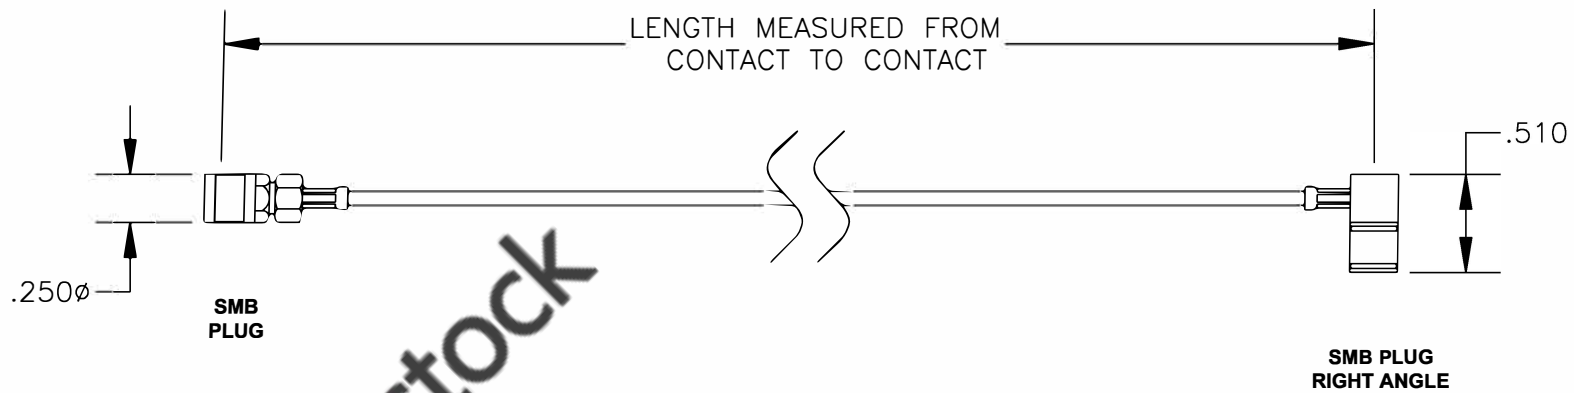

RoHS  
Compliance  
Certified


**8TH FLOOR, BUILDING 1, YONGFU SCIENCE AND TECHNOLOGY CENTER INDUSTRIAL PARK, NANZHA DISTRICT 5, HUMEN, 523900, DONGGUAN, GUANGDONG, CHINA**  
 WEBSITE: [www.ebeestock.com](http://www.ebeestock.com)  
 EMAIL: [sales@ebeestock.com](mailto:sales@ebeestock.com)

|                |  |                                                                             |  |
|----------------|--|-----------------------------------------------------------------------------|--|
| <b>ET30363</b> |  | DES. CABLE ASSEMBLY, RG178B/U, SMB PLUG TO SMB PLUG RIGHT ANGLE (LEAD FREE) |  |
|----------------|--|-----------------------------------------------------------------------------|--|

|        |                |                 |           |            |
|--------|----------------|-----------------|-----------|------------|
| REV. A | FSCM NO. 53919 | CAD FILE 012208 | SCALE N/A | SIZE A 147 |
|--------|----------------|-----------------|-----------|------------|

- NOTES:**
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
  3. DIMENSIONS ARE IN INCHES.
  4. LENGTH TOLERANCE IS  $\pm 1.5\%$  OR  $\pm 3/8"$ , WHICHEVER IS GREATER.