
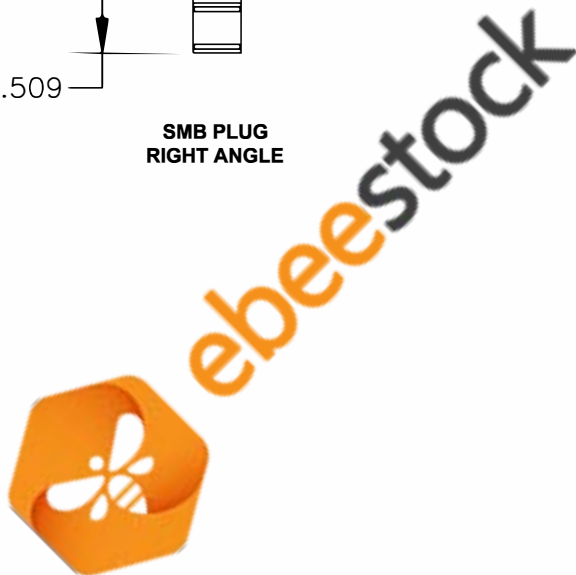



| COMPONENTS           | IMPEDANCE |
|----------------------|-----------|
| SMB PLUG RIGHT ANGLE | 50 OHM    |
| SMB PLUG RIGHT ANGLE | 50 OHM    |
|                      |           |
|                      |           |

| Standard Lengths |                         |
|------------------|-------------------------|
| -12              | 12"                     |
| -24              | 24"                     |
| -36              | 36"                     |
| -48              | 48"                     |
| -60              | 60"                     |
| -XXX             | Custom Length in inches |
|                  |                         |

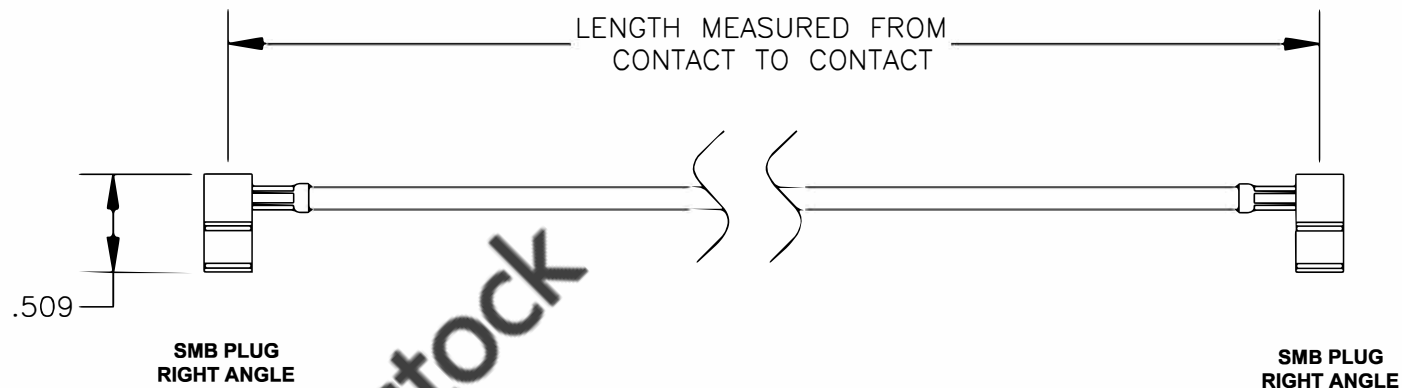

RoHS  
Compliance  
Certified

|   |                |   |           |
|---|----------------|---|-----------|
|  |                | 8TH FLOOR, BUILDING 1, YONGFU SCIENCE AND TECHNOLOGY<br>CENTER INDUSTRIAL PARK, NANZHA DISTRICT 5,<br>HUMEN, 523900, DONGGUAN, GUANGDONG, CHINA |           |
| <b>ebeestock</b>  |                | WEBSITE: <a href="http://www.ebeestock.com">www.ebeestock.com</a><br>EMAIL: <a href="mailto:sales@ebeestock.com">sales@ebeestock.com</a>        |           |
| <b>ET30378</b>  |                | DES. CABLE ASSEMBLY, RG316-DS, SMB PLUG<br>RIGHT ANGLE TO SMB PLUG RIGHT ANGLE<br>(LEAD FREE)   |           |
| REV. A  | FSCM NO. 53919 | CAD FILE 012408   | SCALE N/A |
| SIZE A  |                | 147   |           |

- NOTES:**
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
  3. DIMENSIONS ARE IN INCHES.
  4. LENGTH TOLERANCE IS  $\pm 1.5\%$  OR  $\pm 3/8"$ , WHICHEVER IS GREATER.