



## RF Cable Assemblies Technical Data Sheet


ET30992

# Configuration

Connector 1: SMA Male
Connector 2: SMB Plug
Cable Type: ET-RG58

# Features

- Max Frequency 4 GHz
- 65.9% Phase Velocity
- PVC (NC) Jacket

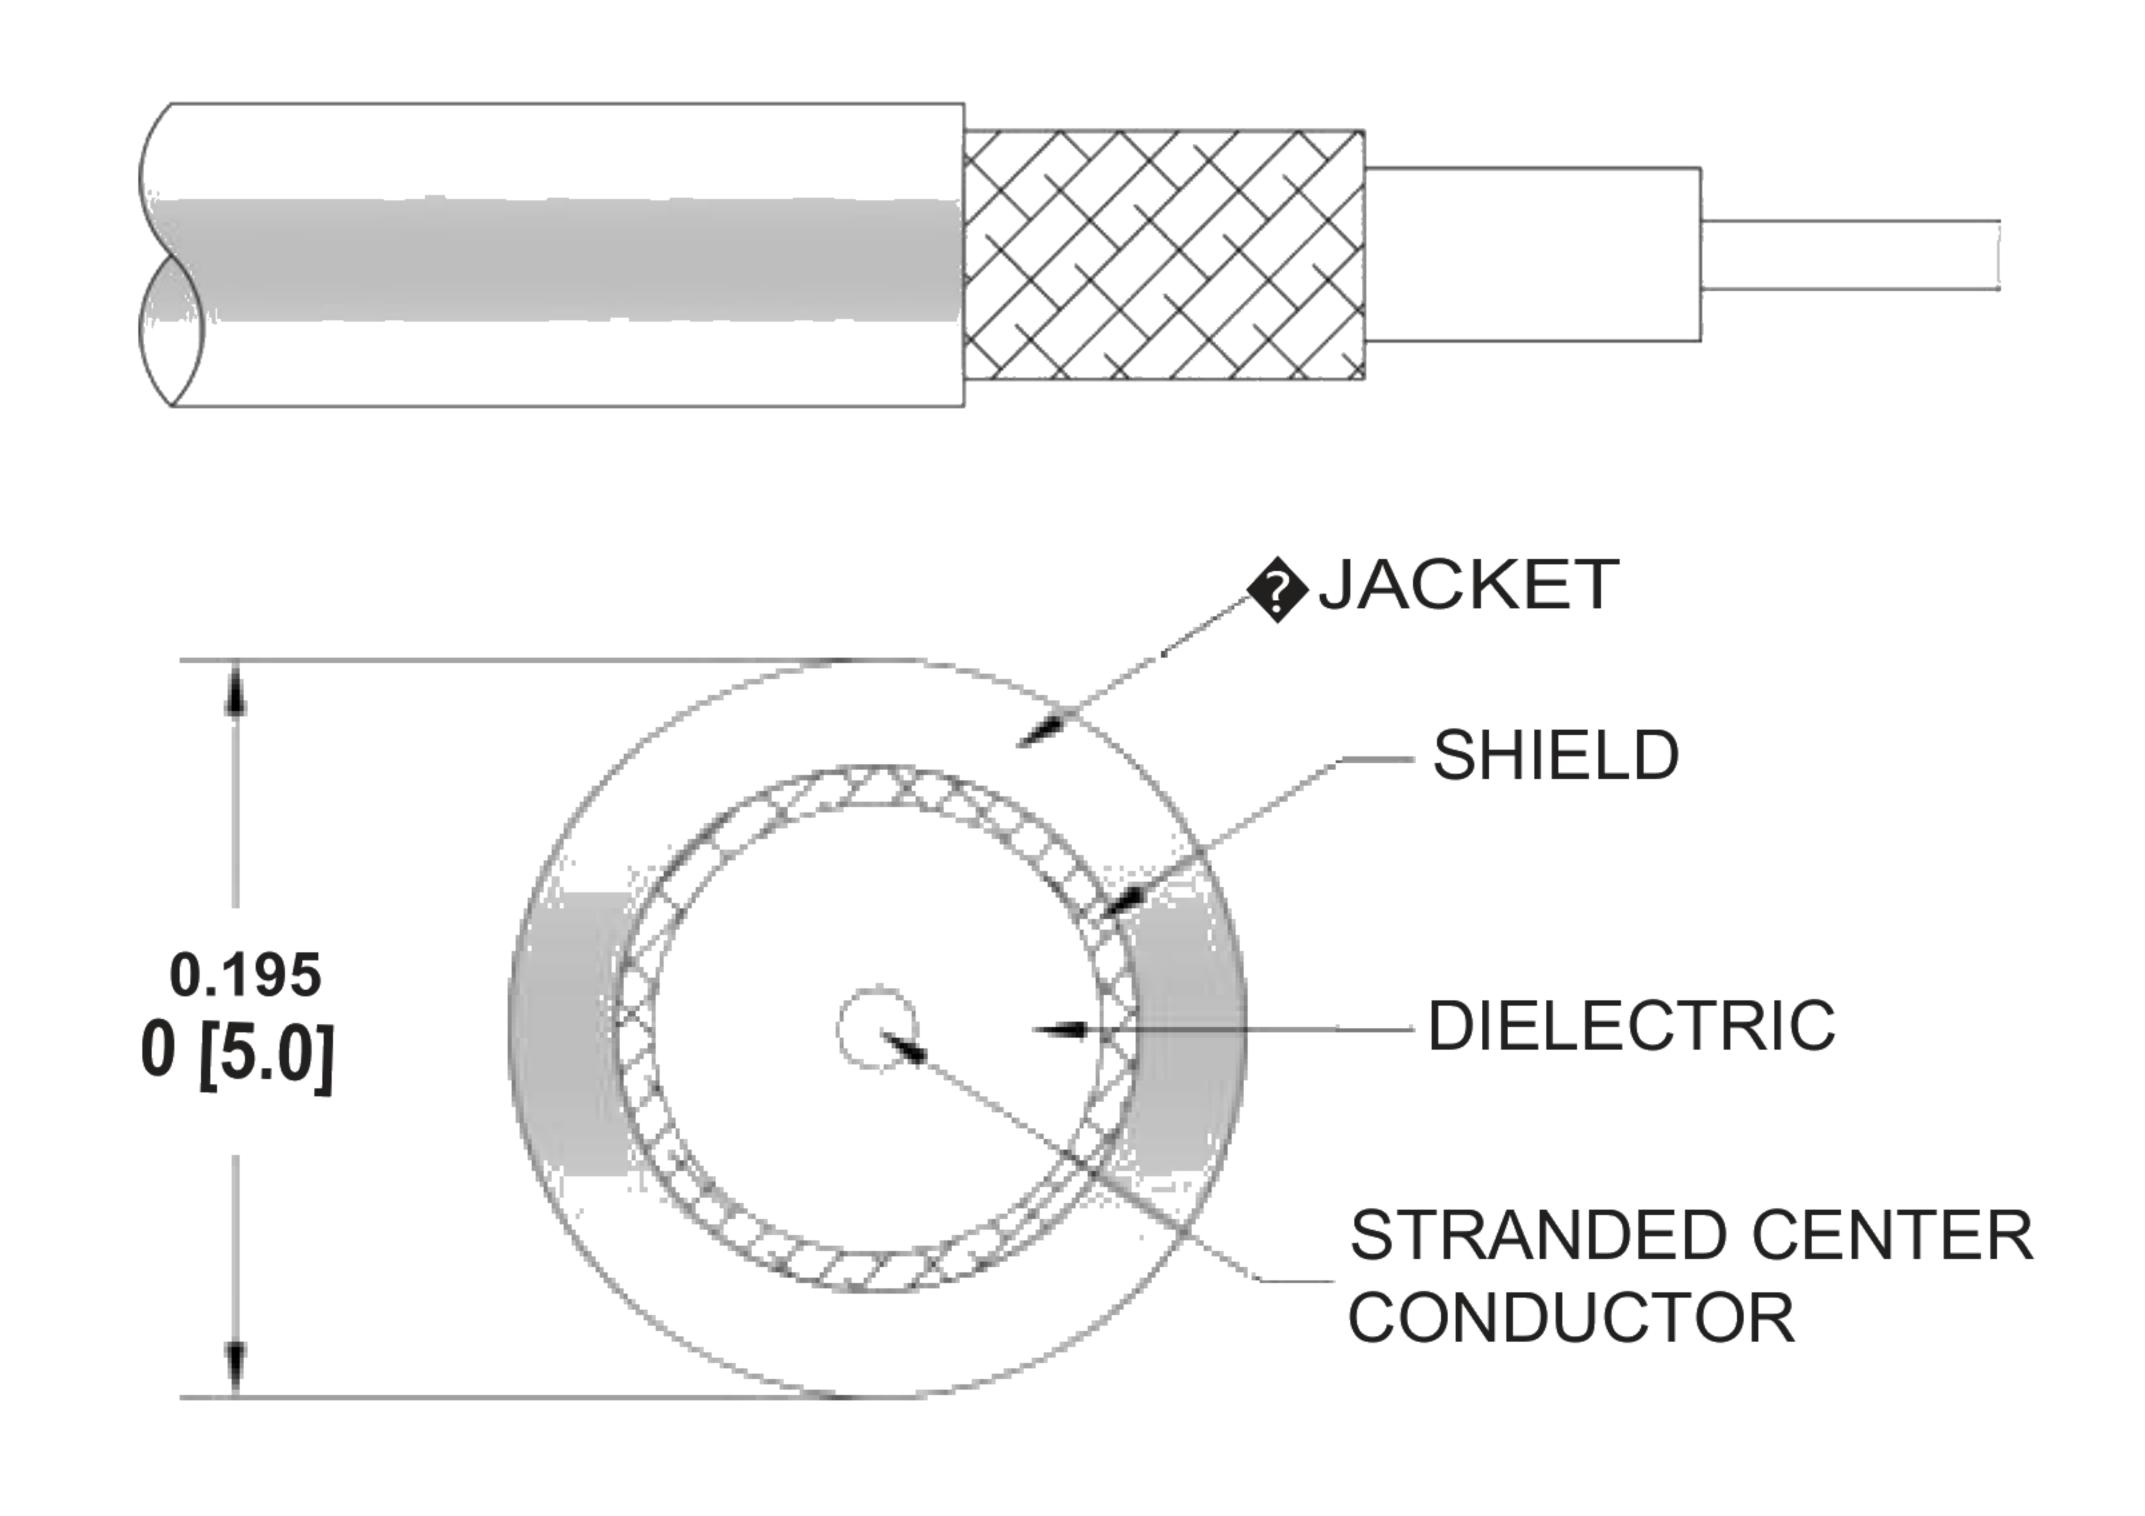

# Applications

General Purpose

Laboratory Use

#### Description

Ebeestock's ET30992 SMA male to SMB plug 6 inch cable using ET-RG58 coax is part of our full line of RF components avail- able for same-day shipping. Ebeestock's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Ebeestock SMA to SMB cable assembly has a male to plug gender configuration with 50 ohm flexible ET-RG58 coax. The ET30992 SMA male to SMB plug cable assembly operates to 4 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Male to SMB Plug Cable 6 Inch Length Using ET-RG58 Coax ET30992





# RF Cable Assemblies Technical Data Sheet

ET30992

## Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		4	GHz
VSWR			1.4:1	
Velocity of Propagation		65.9		%
Capacitance		30.8 [101.05]		pF/ft [pF/m]
Operating Voltage (AC)			335	Vrms

## Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	4	GHz
Insertion Loss (Typ.)	0.225	0.237	0.258	0.3	0.45	dB
VSWR (Max.)	1.4:1	1.4:1	1.4:1	1.4:1	1.4:1	
Return Loss (Max.)	15.56	15.563	15.563	15.563	15.563	dB

### Mechanical Specifications

## Cable Assembly

 Length\*
 6 in [152.4 mm]

 Diameter
 0.315 in [8 mm]

 Weight
 0.041 lbs [18.6 g]

#### Cable

ET-RG58 Cable Type Impedance 50 Ohms Stranded Inner Conductor Type Inner Conductor Material and Plating Copper, Tin PE Dielectric Type Number of Shields Shield Layer 1 Tinned Copper Braid Jacket Material PVC (NC), Black 0.195 in [4.95 mm] Jacket Diameter One Time Minimum Bend Radius 0.98 in [24.89 mm] Repeated Minimum Bend Radius 1.96 in [49.78 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Male to SMB Plug Cable 6 Inch Length Using ET-RG58 Coax ET30992





## RF Cable Assemblies Technical Data Sheet

ET30992

#### Connectors

Description	Connector 1	Connector 2  SMB Plug	
Туре	SMA Male		
Specification	MIL-STD-348A	MIL-STD-348A	
Impedance	50 Ohms	50 Ohms	
Contact Material and Plating	Brass, Gold	Beryllium Copper, Gold	
Contact Plating Specification	50 μin minimum	30 µin minimum	
Dielectric Type	PTFE	PTFE	
Body Material and Plating	Brass, Nickel	Brass, Nickel	
Body Plating Specification	100 μin minimum	100 μin minimum	
Coupling Nut Material and Plating	Brass, Nickel		
Coupling Nut Plating Specification	100 μin minimum		
Hex Size	5/16 inch		
Torque	3 in-lbs [0.34 Nm]		

## **Environmental Specifications**

Temperature

Operating Range -40 to +80 deg C

Compliance Certifications (see product page for current document)

## Plotted and Other Data

Notes:

Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Male to SMB Plug Cable 6 Inch Length Using ET-RG58 Coax ET30992






## RF Cable Assemblies Technical Data Sheet

ET30992

#### How to Order

Part Number Configuration:

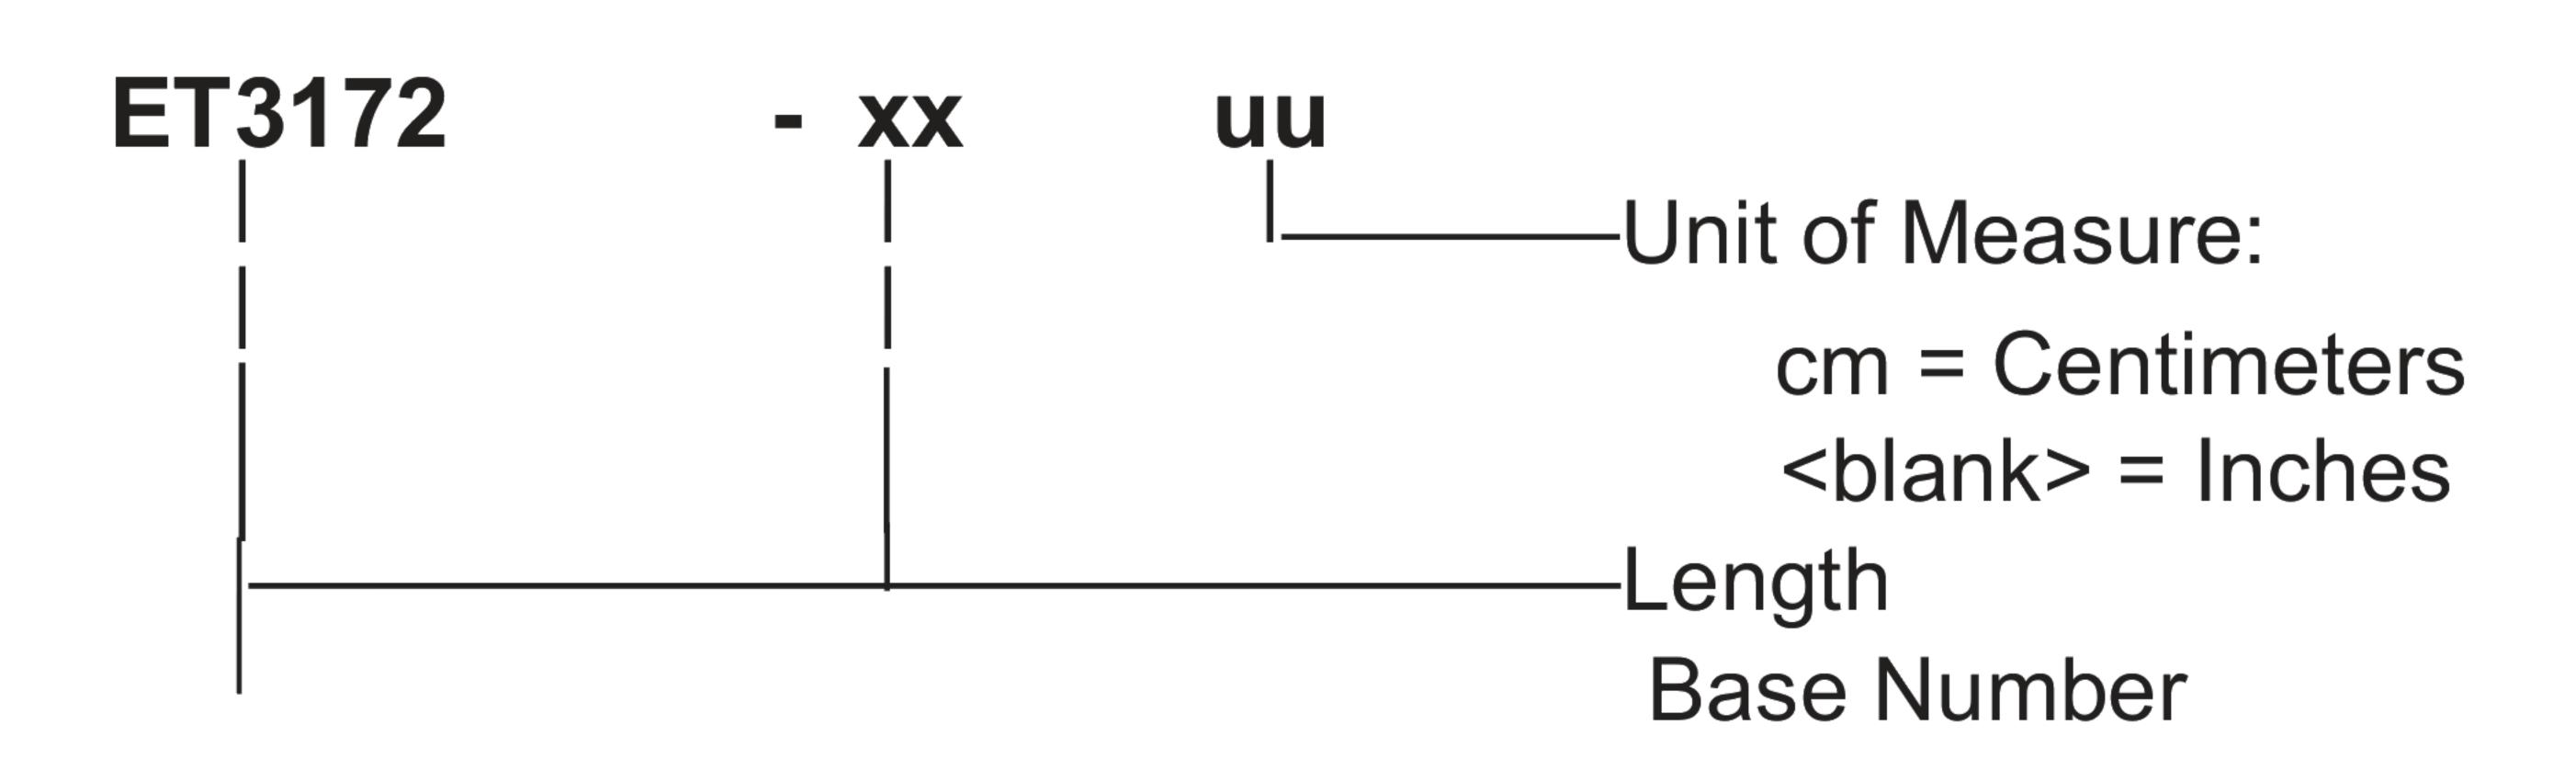

Example: ET3172-12 = 12 inches long cable

ET3172-100cm = 100 cm long cable

SMA Male to SMB Plug Cable 6 Inch Length Using ET-RG58 Coax from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Male to SMB Plug Cable 6 Inch Length Using ET-RG58 Coax ET30992

URL: https://www.ebeestock.com/sma-male-to-smb-plug-cable-6-inch-length-using-rg58-coax-0030992

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

ET30992 CAD Drawing
SMA Male to SMB Plug Cable 6 Inch Length Using ET-RG58 Coax

