
| IMPEDANCE | COMPONENTS |
|-----------|------------|
| 50 OHM | SMP FEMALE |
| 50 OHM | SMP FEMALE |
| 50 OHM | RG405/U |
| ł | RG405/0 |

| Standard Lengths | | |
|------------------|-------------------------|--|
| -12 | 12" | |
| -24 | 24" | |
| -36 | 36" | |
| -48 | 48" | |
| -60 | 60" | |
| -XXX | Custom Length in inches | |
| 1 | | |

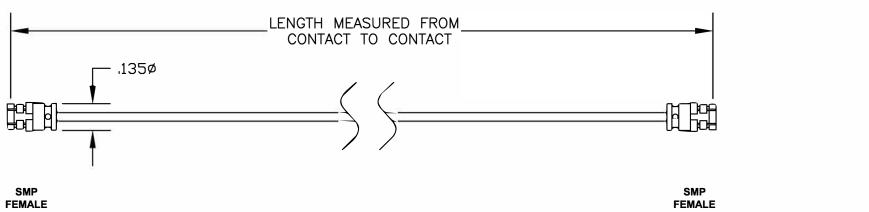

EMALE

| CENTER I | ILDING 1, YONGFU SCIENCE AND TECHNOLOGY Industrial Park, Nanzha District 5, 23900,Dongguan, guangdong, China | | | |
|--|--|--|--|--|
| ebeestock WEBSITE: www.ebeestock.com EMAIL: sales@ebeestock.com | | | | |
| DWG TITLE 9 H 8.8%- | DES. CABLE ASSEMBLY, RG405/U, SMP FEMALE TO SMP FEMALE | | | |
| SIZE A FSCM NO. 53919 | CAD FILE 082207 SCALE N/A 127 | | | |
| NOTES: 1. UNLESS OTHERWISE SPECIFIED A 2. ALL SPECIFICATIONS ARE SUBJE 3. DIMENSIONS ARE IN INCHES. 4. LENGTH TOLERANCE IS ± 1.5% OF | CT TO CHANGE WITHOUT NOTICE AT ANY TIME. | | | |