


SMP Female Right Angle to Push-On SMP Female Cable 48 Inch Length Using Coax

| REVISIONS | | | |
|-----------|-----------------|----------|----------|
| REV. | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 04/23/19 | S.ELLIS |

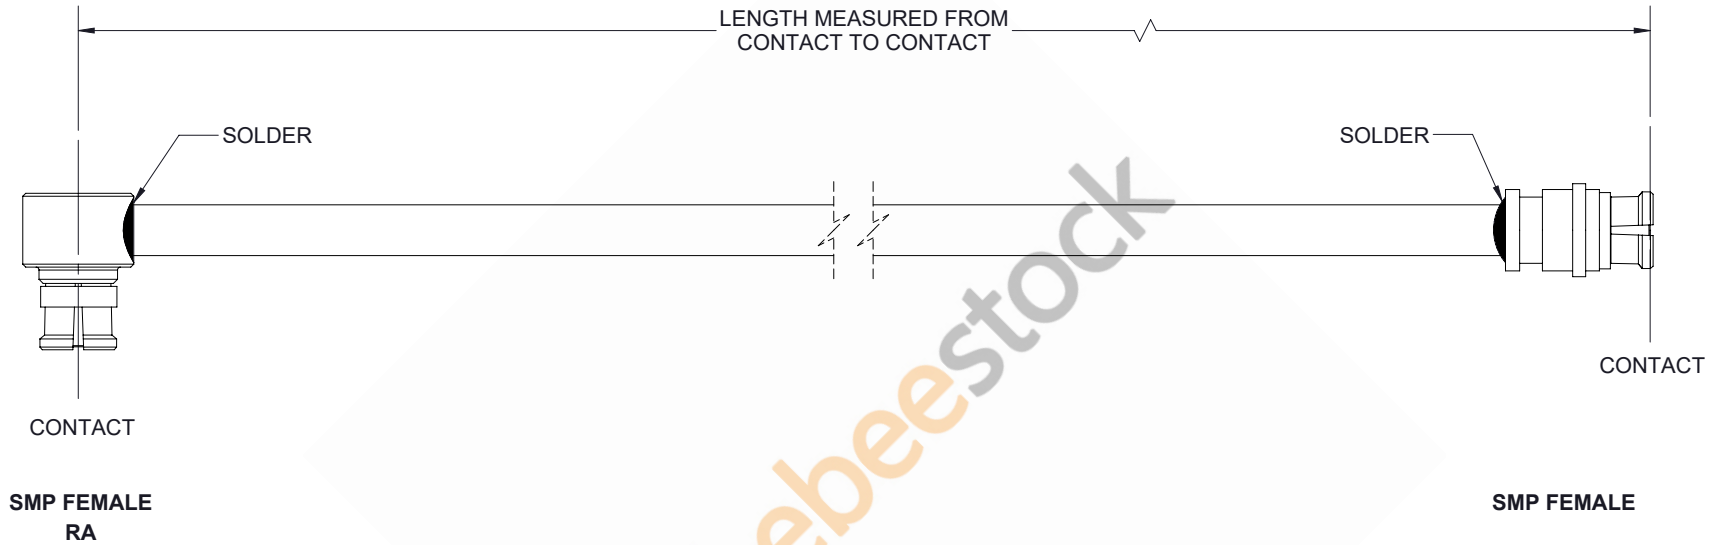

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

| | | | | | |
|--|--|---|---------------|---|------------------------|
| UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS TOLERANCES: .X \pm .2 [5.08] FRACTIONS \pm 1/32 .XX \pm .01 [.25] ANGES \pm 1° .XXX \pm .005 [.13] | |  8TH FLOOR, BUILDING 1, YONGFU SCIENCE AND TECHNOLOGY CENTER INDUSTRIAL PARK, NANZHA DISTRICT 5,HUMEN,523900,DONGGUAN, GUANGDONG, CHINA WEBSITE: www.ebeeStock.com EMAIL: sales@ebeeStock.com | | THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF EBEE STOCK CORPORATION. ALL RIGHTS RESERVED. | |
| ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY. | | SHEET 1 OF 1 | | SCALE N/A | |
| THIRD-ANGLE PROJECTION  | | SIZE A | CAGE 53919 | DRAWN BY K.DANG | PART NUMBER ET32333 |
| | | | | REV A | |