



RF Cable Assemblies Technical Data Sheet


ET32373

Configuration

- Connector 1: Push-OnSMP Female Right Angle
- Connector 2: TNC Female Reverse Polarity Bulkhead
- Cable Type: ET-LMR-100A

Features

- Max Frequency 3 GHz
- Shielding Effectivity > 90 dB
- 66% Phase Velocity
- Double Shielded
- PVC Jacket

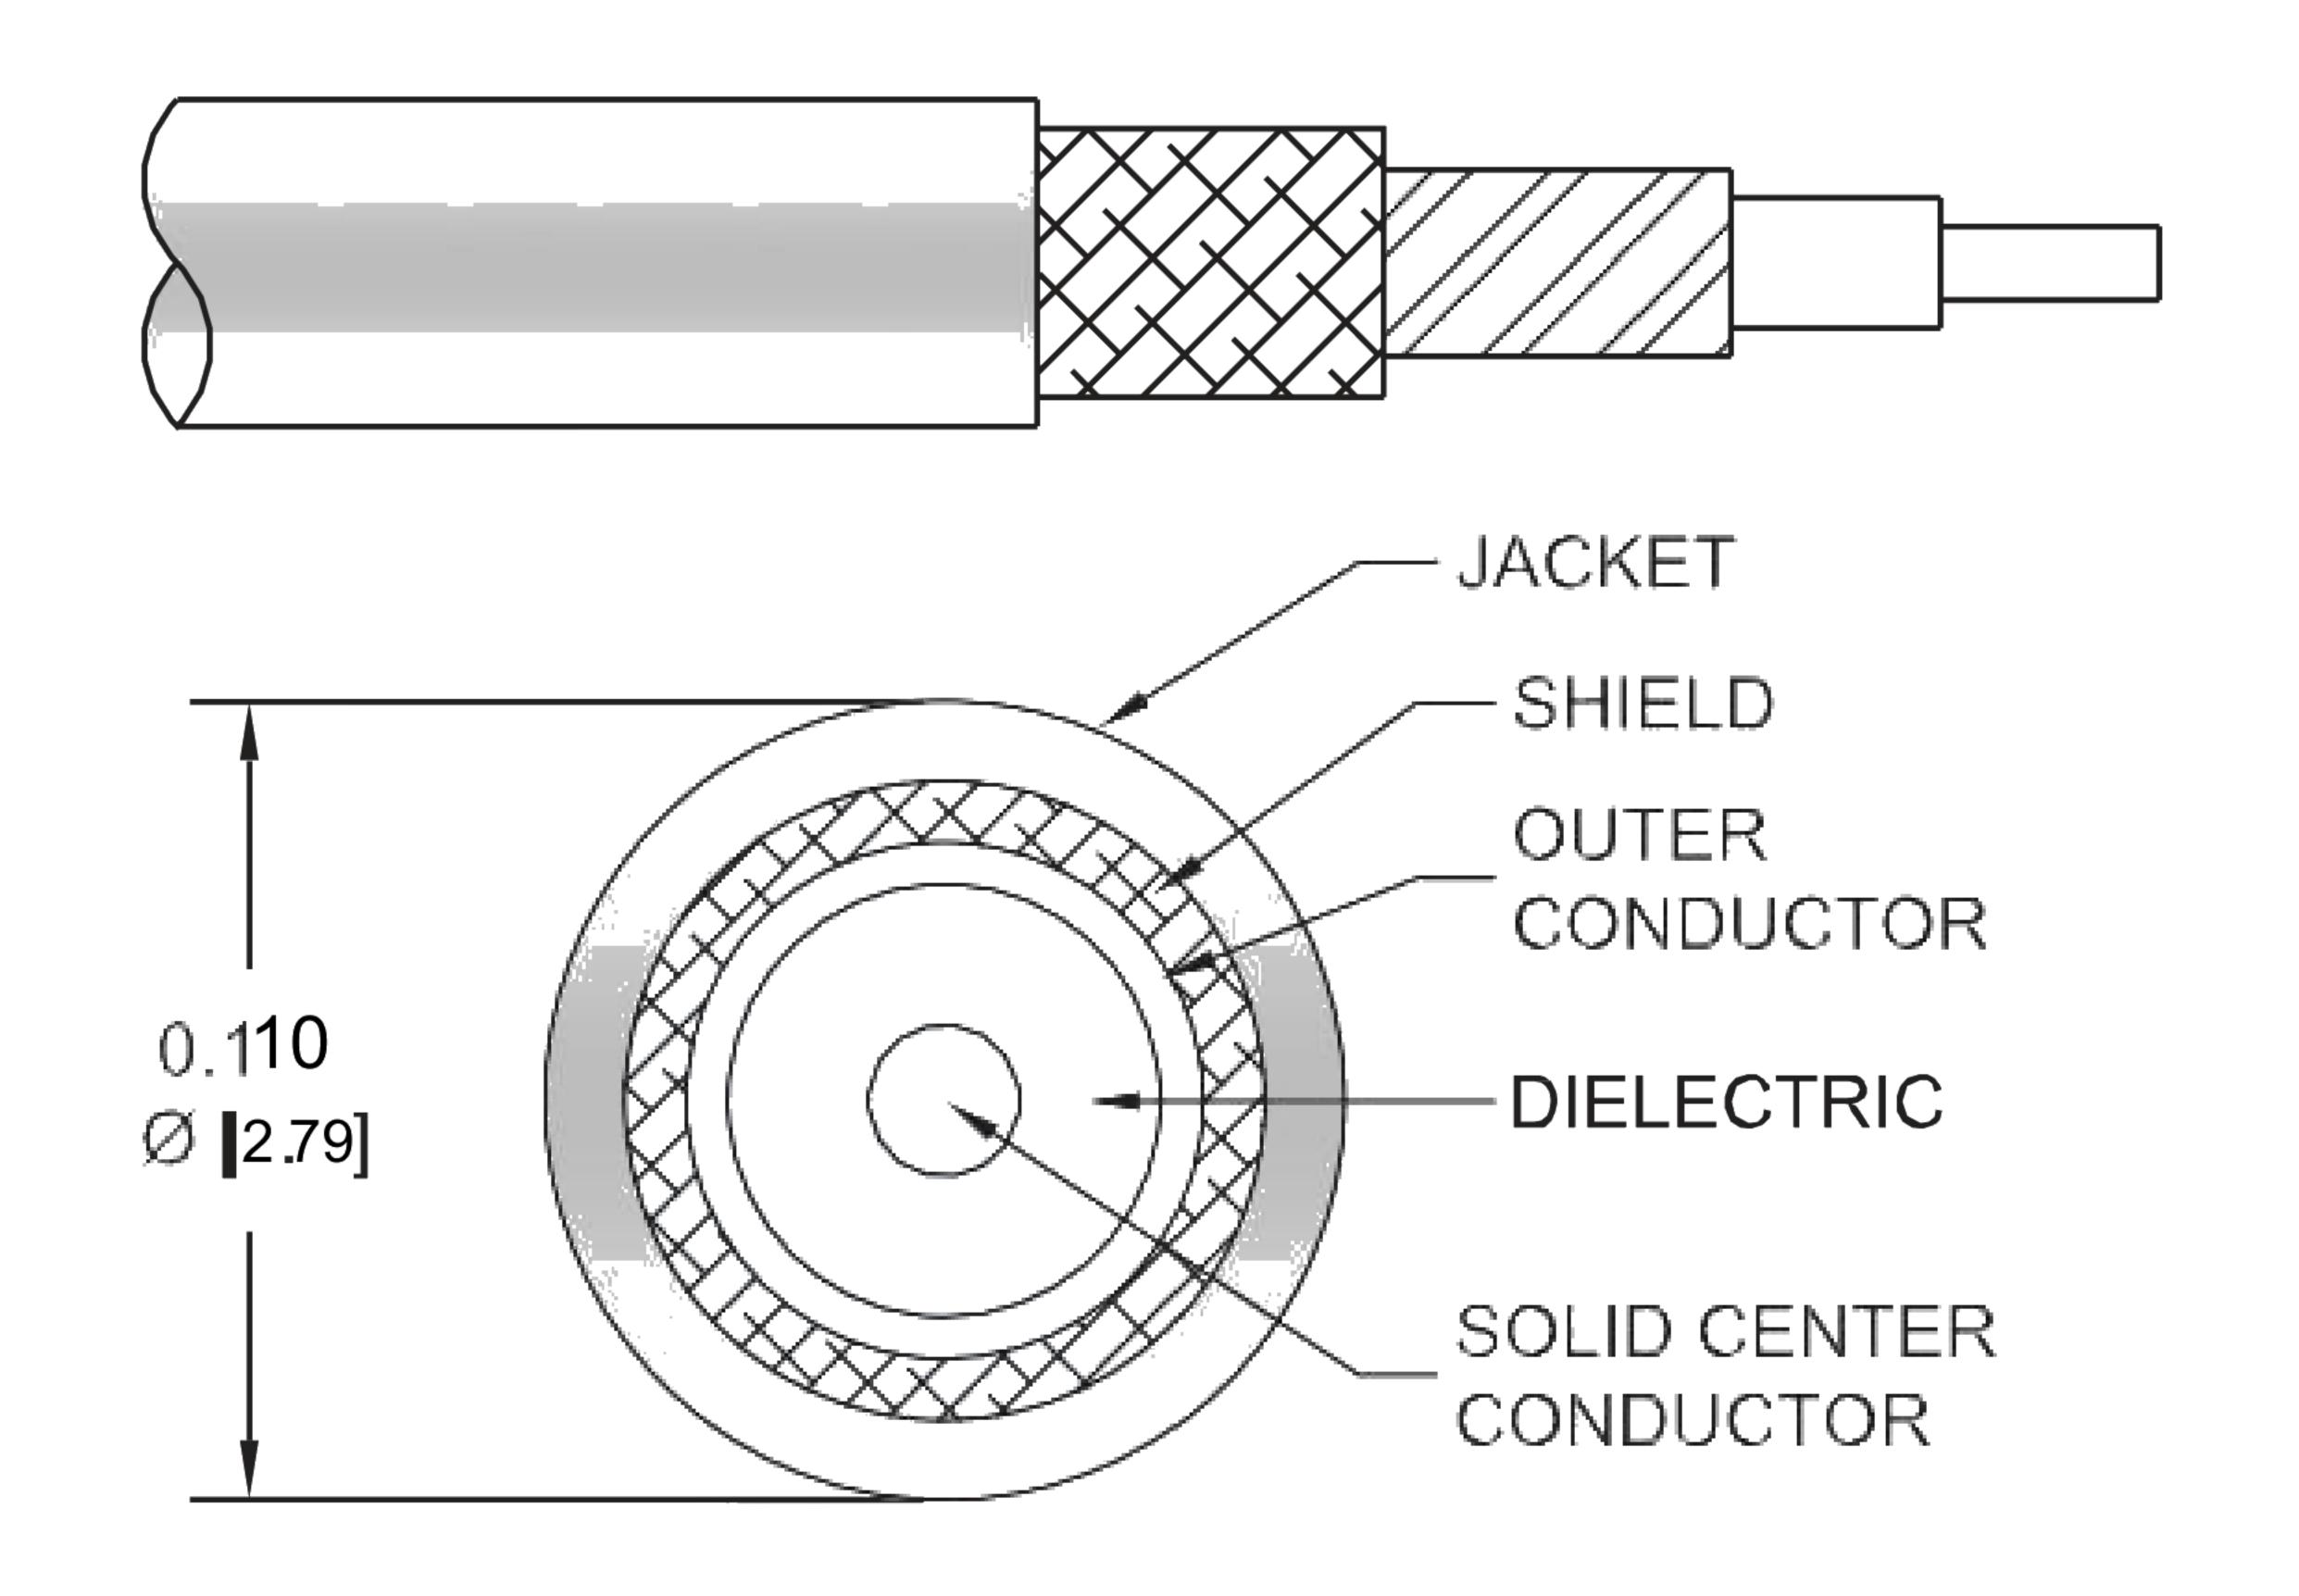

Applications

General Purpose

Laboratory Use

Description

Ebeestock's ET32373 SMP female push-on right angle to reverse polarity TNC female bulkhead 150 cm cable using ET-LMR-100 coax is part of our full line of RF components available for same-day shipping. Ebeestock's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Ebeestock SMP to reverse polarity TNC cable assembly has a female to female gender configuration with 50 ohm flexible ET-LMR-100A coax. The ET3W05481- 150CM SMP female to reverse polarity TNC female cable assembly operates to 3 GHz. The right angle SMP interface on the ET-LMR-100A cable allows for easier connections in tight spaces. Our RF cable assembly with TNC bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications. The double shielding of this Ebeestock cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Push-On SMP Female Right Angle to Reverse Polarity TNC Female Bulkhead Cable 150 cm Length Using ET-LMR-100 Coax ET32373





RF Cable Assemblies Technical Data Sheet

ET32373

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.4:1	
Velocity of Propagation		66		%
RF Shielding	90			dB
Group Delay		1.54 [5.05]		ns/ft [ns/m]
Capacitance		30.8 [101.05]		pF/ft [pF/m]
Inductance		0.077 [0.25]		uH/ft [uH/m]
DC Resistance Inner Conductor		81 [265.75]		Ohms/1000ft [Ohms/
Km]				
DC Resistance Outer Conductor		9.5 [31.17]		Ohms/1000ft [Ohms/
Km]				
Jacket Spark			2,000	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	3	GHz
Insertion Loss (Max.)	0.87	1.12	1.48	2.27	2.44	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.3dB of connector loss.

Mechanical Specifications

Cable Assembly

Length* 59.05 in [149.99 cm]
Diameter 0.68 in [17.27 mm]

Cable

Cable Type
Impedance
Inner Conductor Type

ET-LMR-100A
50 Ohms
Solid

Inner Conductor Material and Plating Copper Clad Steel

Dielectric Type
Number of Shields
2

Shield Layer 1
Shield Layer 2
Aluminum Tape
Tinned Copper Braid

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Push-On SMP Female Right Angle to Reverse Polarity TNC Female Bulkhead Cable 150 cm Length Using ET-LMR-100 Coax ET32373

www.ebeestock.com





RF Cable Assemblies Technical Data Sheet

ET32373

Jacket Material PVC, Black Jacket Diameter 0.11 in [2.79 mm]

One Time Minimum Bend Radius

Repeated Minimum Bend Radius

1 in [25.4 mm]

Bending Moment

7 lt Plate Crush

Tensile Strength

0.25 in [6.35 mm]

1 in [25.4 mm]

0.1 lbs-ft [0.14 N-m]

10 lbs/in [0.18 Kg/mm]

15 lbs [6.8 Kg]

Connectors

Description	Connector 1	Connector 2	
Type	SMP Female Right Angle	TNC Female Reverse Polarity Bulkhead	
Specification	MIL-STD-348A	MIL-STD-348	
Impedance	50 Ohms	50 Ohms	
Connection Method	Push-On		
Contact Material and Plating	Beryllium Copper, Gold	Phosphor Bronze, Gold	
Contact Plating Specification	30µ in. minimum	30 µin minimum	
Dielectric Type	Teflon	PTFE	
Outer Conductor Material and Plating	Beryllium Copper, Gold		
Outer Conductor Plating Specification	3μ in. minimum		
Body Material and Plating	Brass, Gold	Brass, Nickel	
Body Plating Specification	3µ in. minimum		

Mechanical Specification Notes:

Environmental Specifications

Temperature

Operating Range -40 to +85 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Push-On SMP Female Right Angle to Reverse Polarity TNC Female Bulkhead Cable 150 cm Length Using ET-LMR-100 Coax ET32373

^{*}All cable assemblies have a length tolerance of 1.5% or ± 3/8", whichever is greater.





RF Cable Assemblies Technical Data Sheet

ET32373

How to Order

Part Number Configuration:

ET3W05481 - xx uu

Unit of Measure:

cm = Centimeters

chlank> = Inches

Base Number

Example: ET3W05481-12 = 12 inches long cable

ET3W05481-100cm = 100 cm long cable

Push-On SMP Female Right Angle to Reverse Polarity TNC Female Bulkhead Cable 150 cm Length Using ET-LMR-100 Coax from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Push-On SMP Female Right Angle to Reverse Polarity TNC Female Bulkhead Cable 150 cm Length Using ET-LMR-100 Coax ET32373

URL: https://www.ebeestock.com/push-on-smp-female-right-angle-to-reverse-polarity-tnc-female-bulkhead-cable-12-inch-length-using-lmr-100-coax-0032366

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

