



## RF Cable Assemblies Technical Data Sheet

ET32418


# Configuration

Connector 1: SMP Female Right Angle
Connector 2: SMA Female Bulkhead

Cable Type: ET38323

### Features

- Max Frequency 3 GHz
- Shielding Effectivity > 100 dB
- 69.5% Phase Velocity
- FEP Jacket

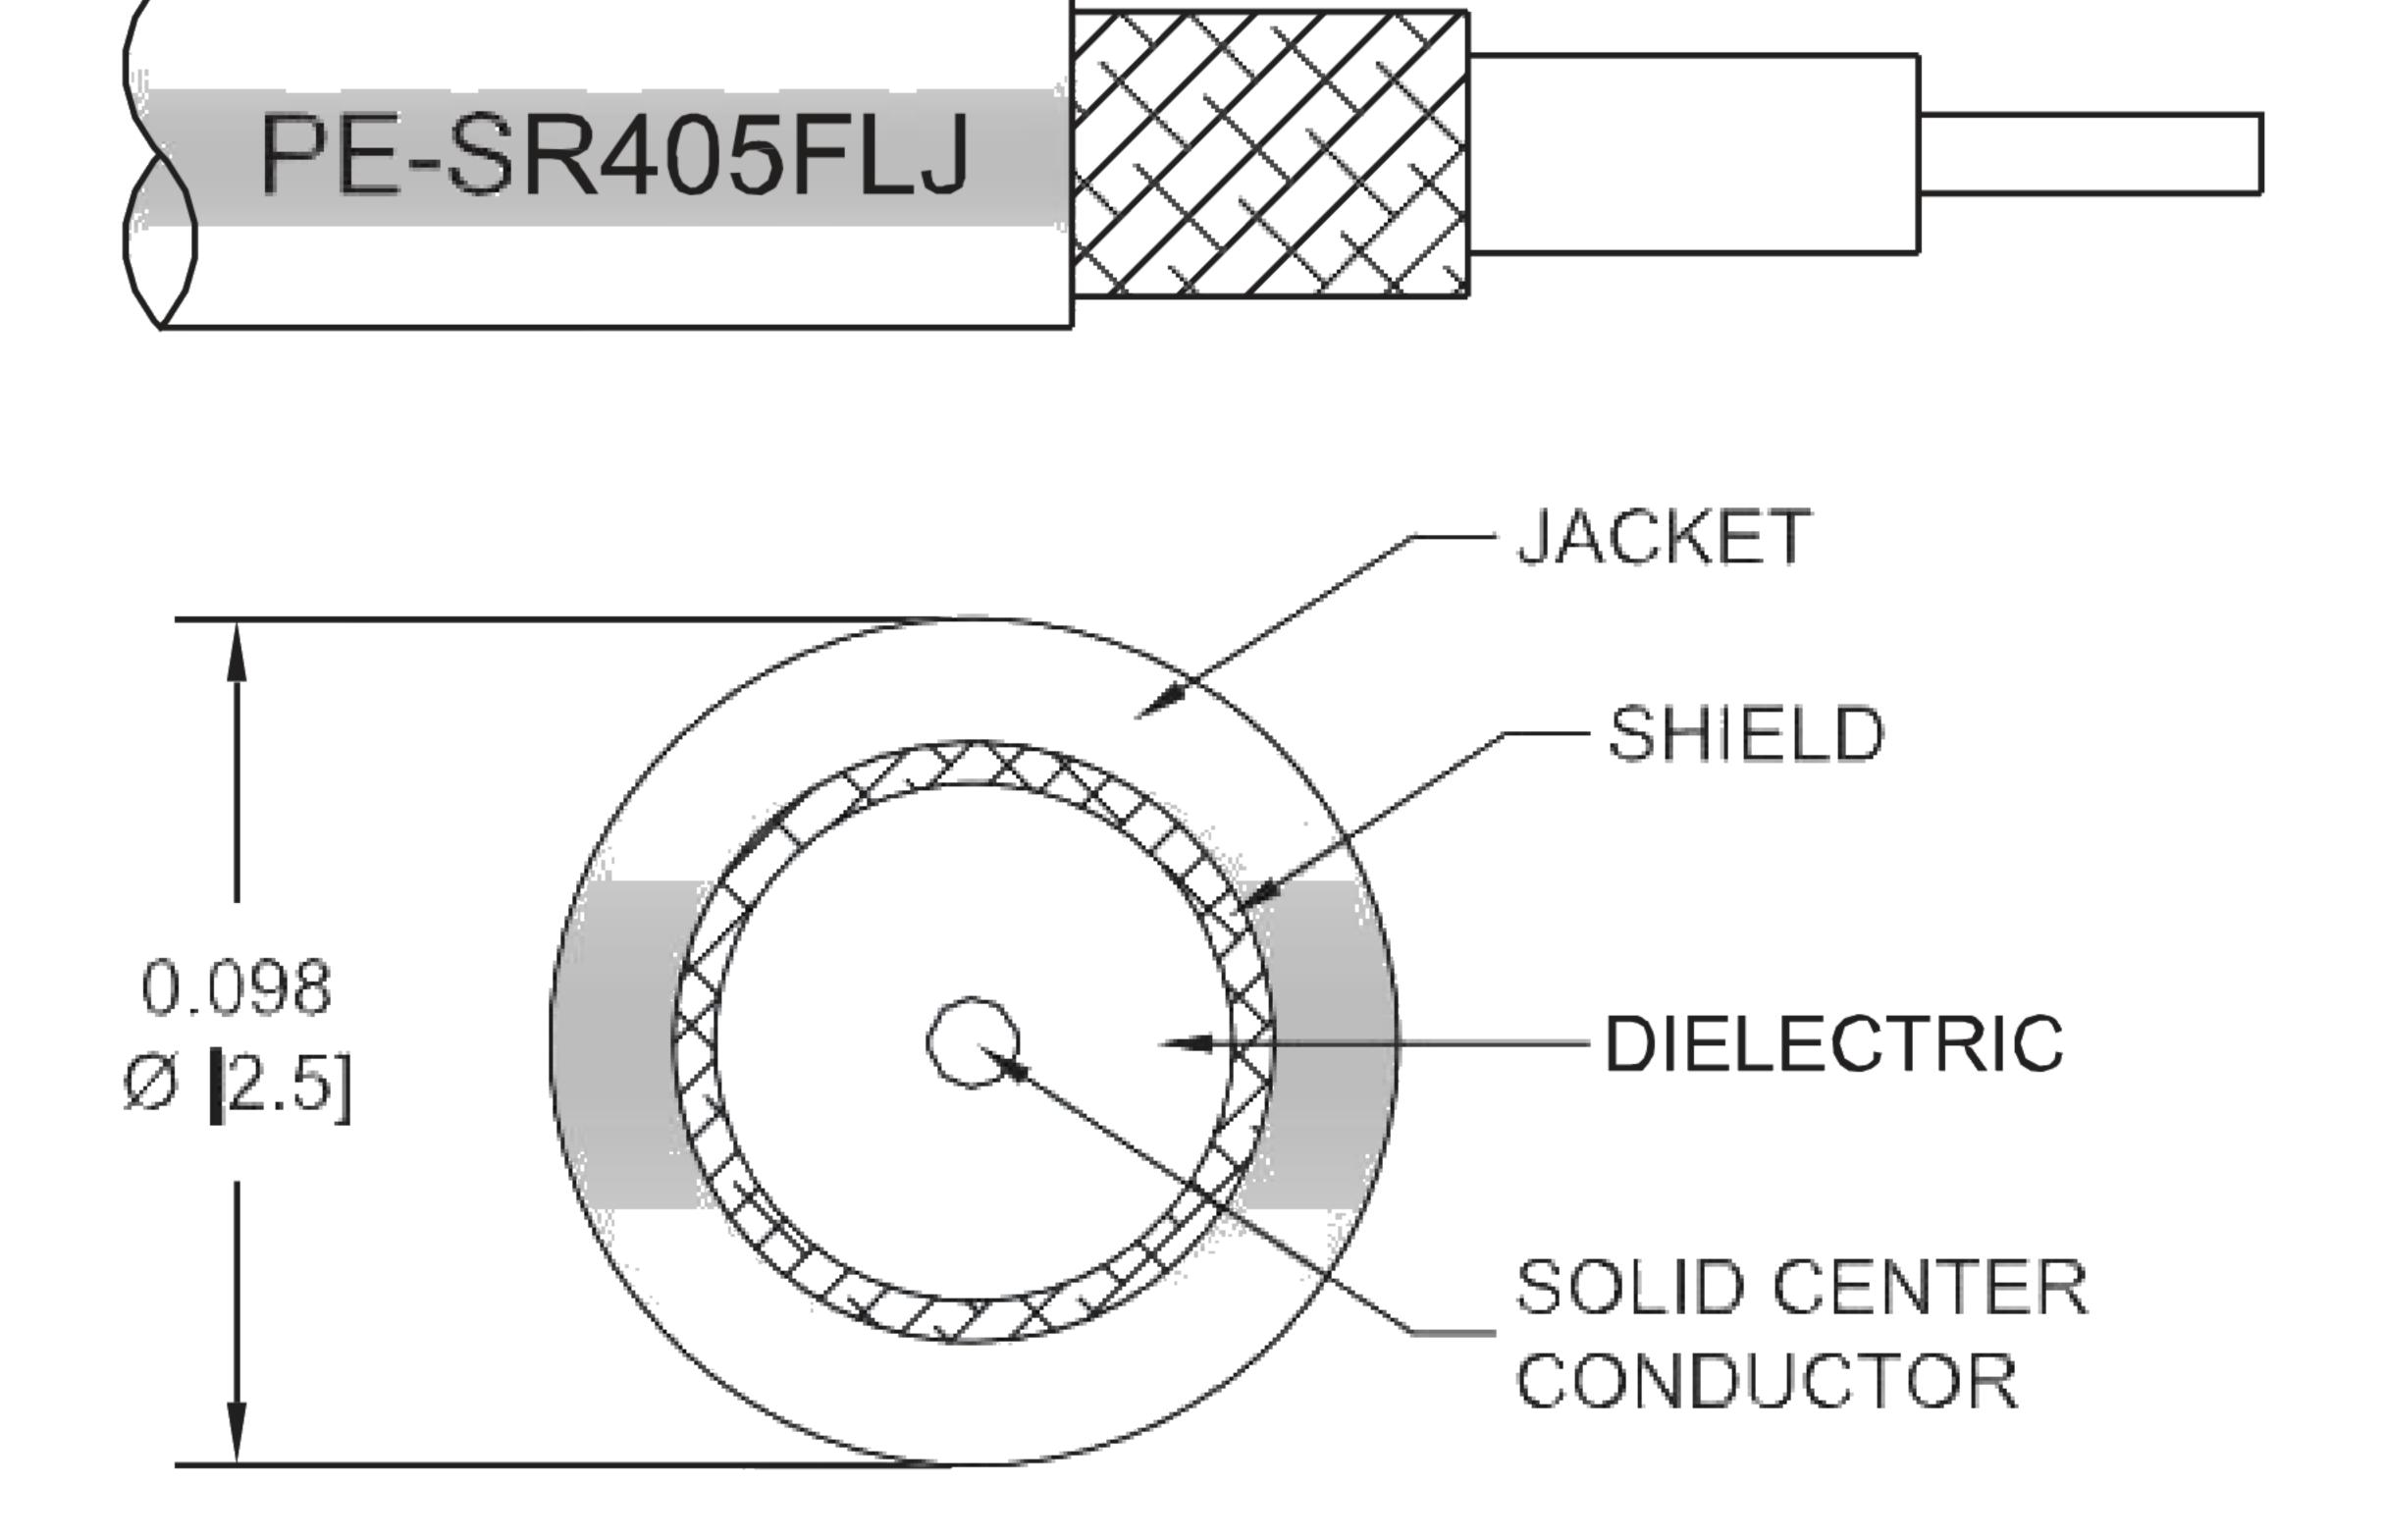

# Applications

General Purpose

Laboratory Use

#### Description

Ebeestock's ET32418 SMP female right angle to SMA female bulkhead 150 cm cable using ET38323 coax is part of our full line of RF components available for same-day shipping. Ebeestock's formable RF cable assemblies provide an alternative to costly pre-formed semi-rigid assemblies since they are hand formable. This Ebeestock SMP to SMA cable assembly has a female to female gender configuration with 50 ohm formable ET38323 coax. The ET3W06520/ HS-150CM SMP female to SMA female cable assembly operates to 3 GHz. The right angle SMP interface on the ET38323 cable allows for easier connections in tight spaces. Our RF cable assembly with SMA bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMP Female Right Angle to SMA Female Bulkhead Cable 150 cm Length Using ET-SR-405FLJ Coax with HeatShrink ET32418





### RF Cable Assemblies Technical Data Sheet

ET32418

### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.5:1	
Velocity of Propagation		69.5		%
RF Shielding	100			dB
Group Delay		1.43 [4.69]		ns/ft [ns/m]
Capacitance		29 [95.14]		pF/ft [pF/m]
DC Resistance Inner Conductor		65.7 [215.55]		Ohms/1000ft [Ohms/
Km]				
DC Resistance Outer Conductor		10.2 [33.46]		Ohms/1000ft [Ohms/
Km]				

### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.5	1	2.5	3		GHz
Insertion Loss (Max.)	1.04	1.41	2.01	2.21		dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.3dB of connector loss.

#### Mechanical Specifications

#### Cable Assembly

Length\* 59.05 in [149.99 cm]
Diameter 0.433 in [11 mm]

#### Cable

Cable Type
Impedance
Inner Conductor Type

ET38323
50 Ohms
Solid

Inner Conductor Material and Plating Copper Clad Steel, Silver

Outer Conductor Material and Plating Tinned Copper Composite Braid

Jacket Material FEP, Black Jacket Diameter 0.105 in [2.67 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMP Female Right Angle to SMA Female Bulkhead Cable 150 cm Length Using ET-SR-405FLJ Coax with HeatShrink ET32418





### RF Cable Assemblies Technical Data Sheet

ET32418

One Time Minimum Bend Radius Repeated Minimum Bend Radius

0.5 in [12.7 mm] 0.787 in [19.99 mm]

#### Connectors

Description	Connector 1	Connector 2 SMA Female Bulkhead		
Type	SMP Female Right Angle			
Specification	DESC 94008			
Impedance	50 Ohms	50 Ohms		
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold over Nickel		
Contact Plating Specification	MIL-G-45204			
Dielectric Type	PTFE	PTFE		
Body Material and Plating	Beryllium Copper, Gold	Brass, Gold over Nickel		
Body Plating Specification	MIL-G-45204			

Mechanical Specification Notes:

Compliance Certifications (see product page for current document)

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMP Female Right Angle to SMA Female Bulkhead Cable 150 cm Length Using ET-SR-405FLJ Coax with HeatShrink ET32418

<sup>\*</sup>All cable assemblies have a length tolerance of 1.5% or ± 3/8", whichever is greater.






### RF Cable Assemblies Technical Data Sheet

ET32418

#### How to Order

Part Number Configuration:

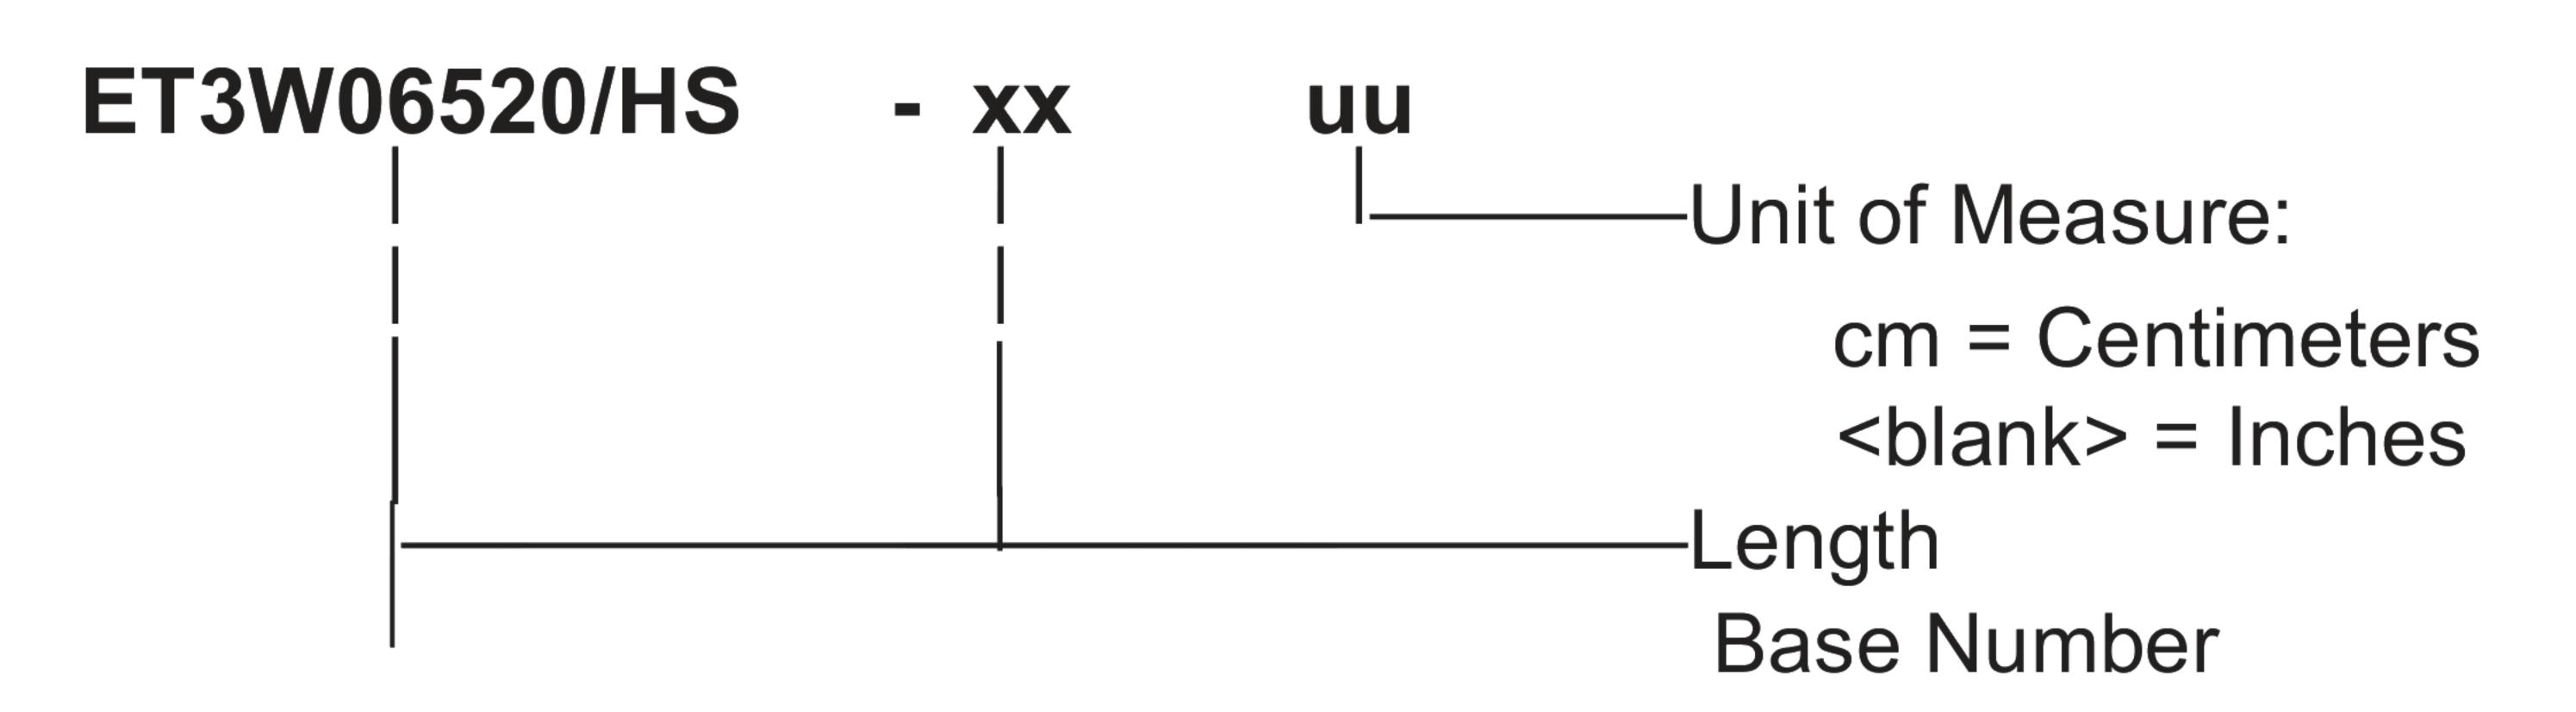

Example: ET3W06520/HS-12 = 12 inches long cable

ET3W06520/HS-100cm = 100 cm long cable

SMP Female Right Angle to SMA Female Bulkhead Cable 150 cm Length Using ET38323 Coax with HeatShrink from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMP Female Right Angle to SMA Female Bulkhead Cable 150 cm Length Using ET38323 Coax with HeatShrink ET32418

**URL:** https://www.ebeestock.com/smp-female-right-angle-to-sma-female-bulkhead-cable-12-inch-leng th-using-pe-sr405flj-coax-with-heatshrink-0032411

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

