

SMP Female Right Angle to SMP Female Right Angle Cable 12 In ch Length Using ET38322J Coax



RF Cable Assemblies Technical Data Sheet

ET32429


Configuration

Connector 1: SMP Female Right Angle
 Connector 2: SMP Female Right Angle

Cable Type: ET38323

Features

- Max Frequency 18 GHz
- Shielding Effectivity > 100 dB
- 69.5% Phase Velocity
- FEP Jacket

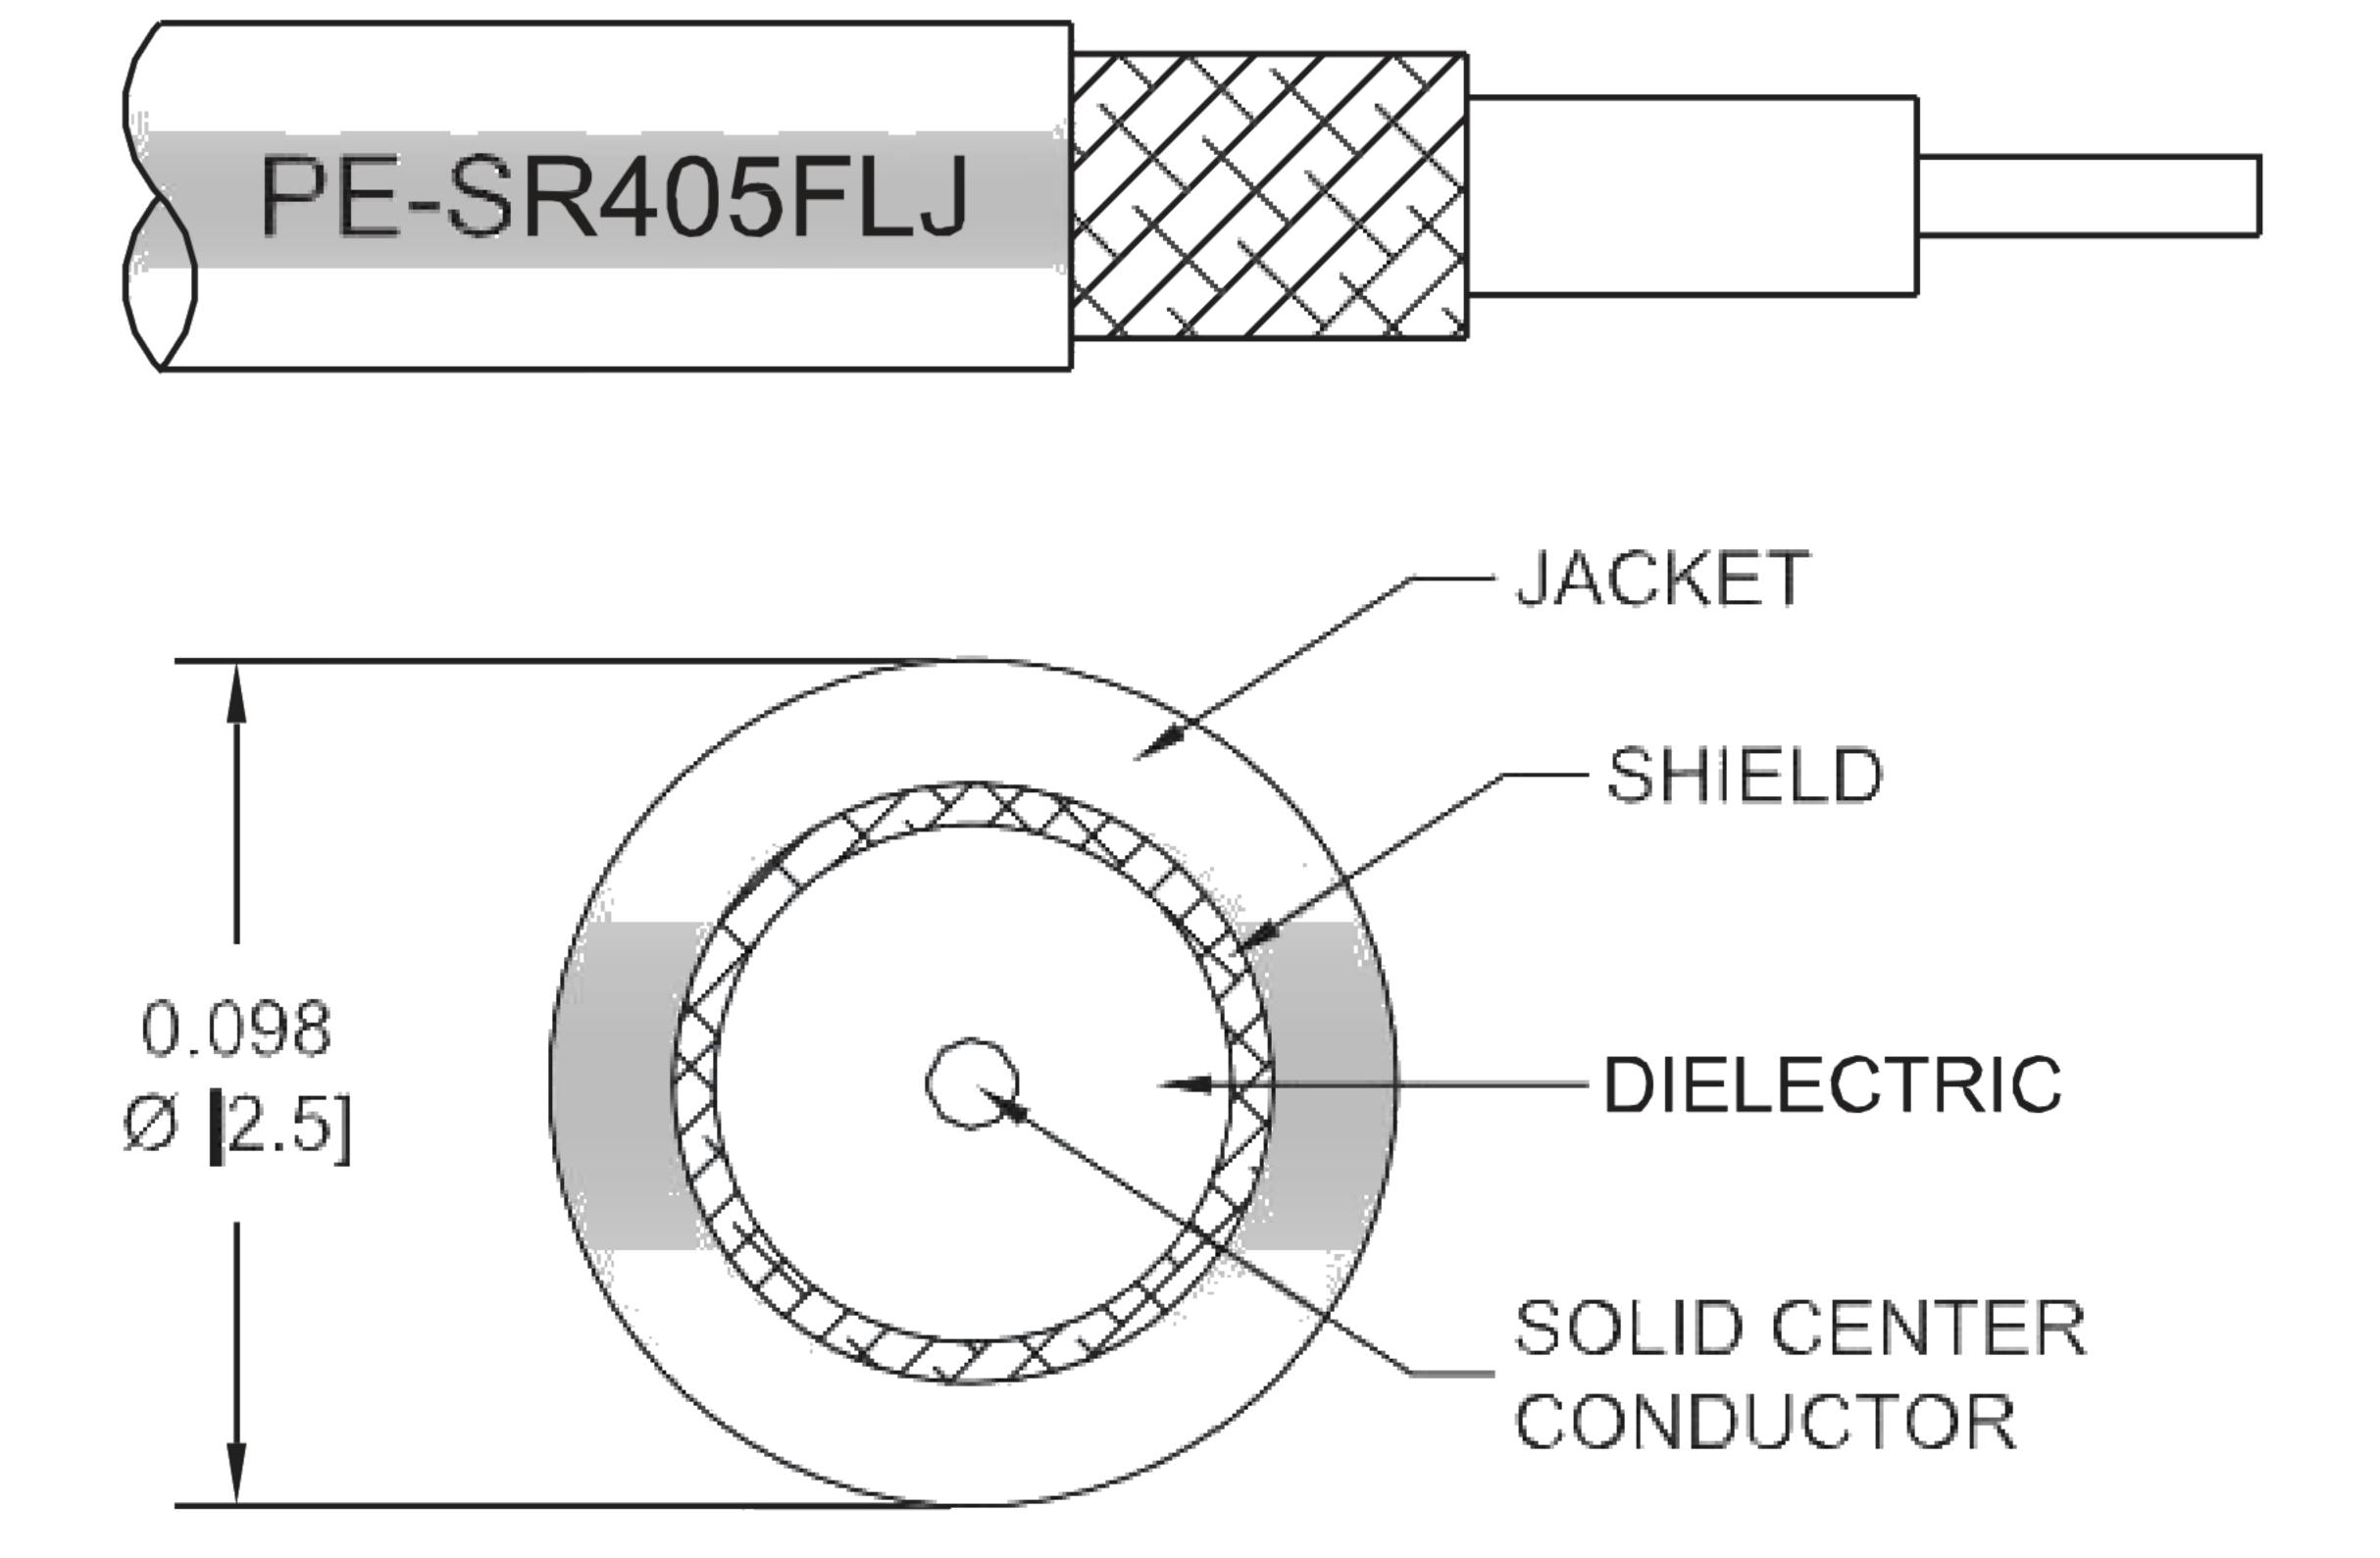

Applications

General Purpose

Laboratory Use

Description

Ebeestock's ET32429 SMP female right angle to SMP female right angle 12 inch cable using ET38323 coax is part of our full line of RF components available for same-day shipping. Ebeestock's formable RF cable assemblies provide an alternative to costly pre-formed semi-rigid assemblies since they are hand formable. This Ebeestock SMP to SMP cable assembly has a female to female gender configuration with 50 ohm formable ET38323 coax. The ET32429 SMP female to SMP female cable assembly operates to 18 GHz. The right angle SMP interfaces on the ET38323 cable allow for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMP Female Right Angle to SMP Female Right Angle Cable 12 Inch Length Using ET-SR-405FLJ Coax ET32429



SMP Female Right Angle to SMP Female Right Angle Cable 12 In ch Length Using ET38322J Coax



RF Cable Assemblies Technical Data Sheet

ET32429

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
VSWR			1.4:1	
Velocity of Propagation		69.5		%
RF Shielding	100			dB
Group Delay		1.43 [4.69]		ns/ft [ns/m]
Capacitance		29 [95.14]		pF/ft [pF/m]
DC Resistance Inner Conductor		65.7 [215.55]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		10.2 [33.46]		Ω/1000ft [Ω/Km]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	1	2	4.5	9	18	GHz
Insertion Loss (Max.)	0.63	0.68	0.81	1.04	1.5	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax used in this assembly. Insertion Loss is estimated as 0.2 dB per connector.

Mechanical Specifications

Cable Assembly

Length* 12 in [304.8 mm]
Diameter 0.156 in [3.96 mm]

Cable

Cable Type
Impedance
Inner Conductor Type

ET38323

Solid

Inner Conductor Material and Plating Copper Clad Steel, Silver

Dielectric Type

Number of Shields

1

Outer Conductor Material and Plating Tinned Copper Composite Braid

Jacket Material FEP, Black

Jacket Diameter 0.105 in [2.67 mm]

One Time Minimum Bend Radius 0.5 in [12.7 mm]
Repeated Minimum Bend Radius 0.787 in [19.99 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMP Female Right Angle to SMP Female Right Angle Cable 12 Inch Length Using ET-SR-405FLJ Coax ET32429

www.ebeestock.com



SMP Female Right Angle to SMP Female Right Angle Cable 12 In ch Length Using ET38322J Coax



RF Cable Assemblies Technical Data Sheet

ET32429

Connectors

Description	Connector 1	Connector 2		
Type	SMP Female Right Angle	SMP Female Right Angle		
Specification	MIL-STD-348	MIL-STD-348		
Impedance	50 Ohms	50 Ohms		
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold		
Contact Plating Specification	MIL-G-45204	MIL-G-45204		
Dielectric Type	PTFE	PTFE		
Body Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold		
Body Plating Specification	MIL-G-45204	MIL-G-45204		

Environmental Specifications

Temperature

Operating Range

-55 to +125 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMP Female Right Angle to SMP Female Right Angle Cable 12 Inch Length Using ET-SR-405FLJ Coax ET32429

www.ebeestock.com



SMP Female Right Angle to SMP Female Right Angle Cable 12 In ch Length Using ET38322J Coax



RF Cable Assemblies Technical Data Sheet

ET32429

How to Order

Part Number Configuration:

ET3W08886 - xx uu

Unit of Measure:

cm = Centimeters

chlank> = Inches

Base Number

Example: ET32429 = 12 inches long cable

ET3W08886-100cm = 100 cm long cable

SMP Female Right Angle to SMP Female Right Angle Cable 12 Inch Length Using ET38323 Coax from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMP Female Right Angle to SMP Female Right Angle Cable 12 Inch Length Using ET-SR405FLJ Coax ET32429

URL: https://www.ebeestock.com/smp-female-right-angle-to-smp-female-right-angle-cable-12-inch-length-using-pe-sr405flj-coax-0032429

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

