



# RF Cable Assemblies Technical Data Sheet

ET32488


# Configuration

Connector 1: TNC Female Bulkhead
 Connector 2: SMP Female Right Angle

Cable Type: ET38322

### Features

- Max Frequency 6 GHz
- 69.5% Phase Velocity

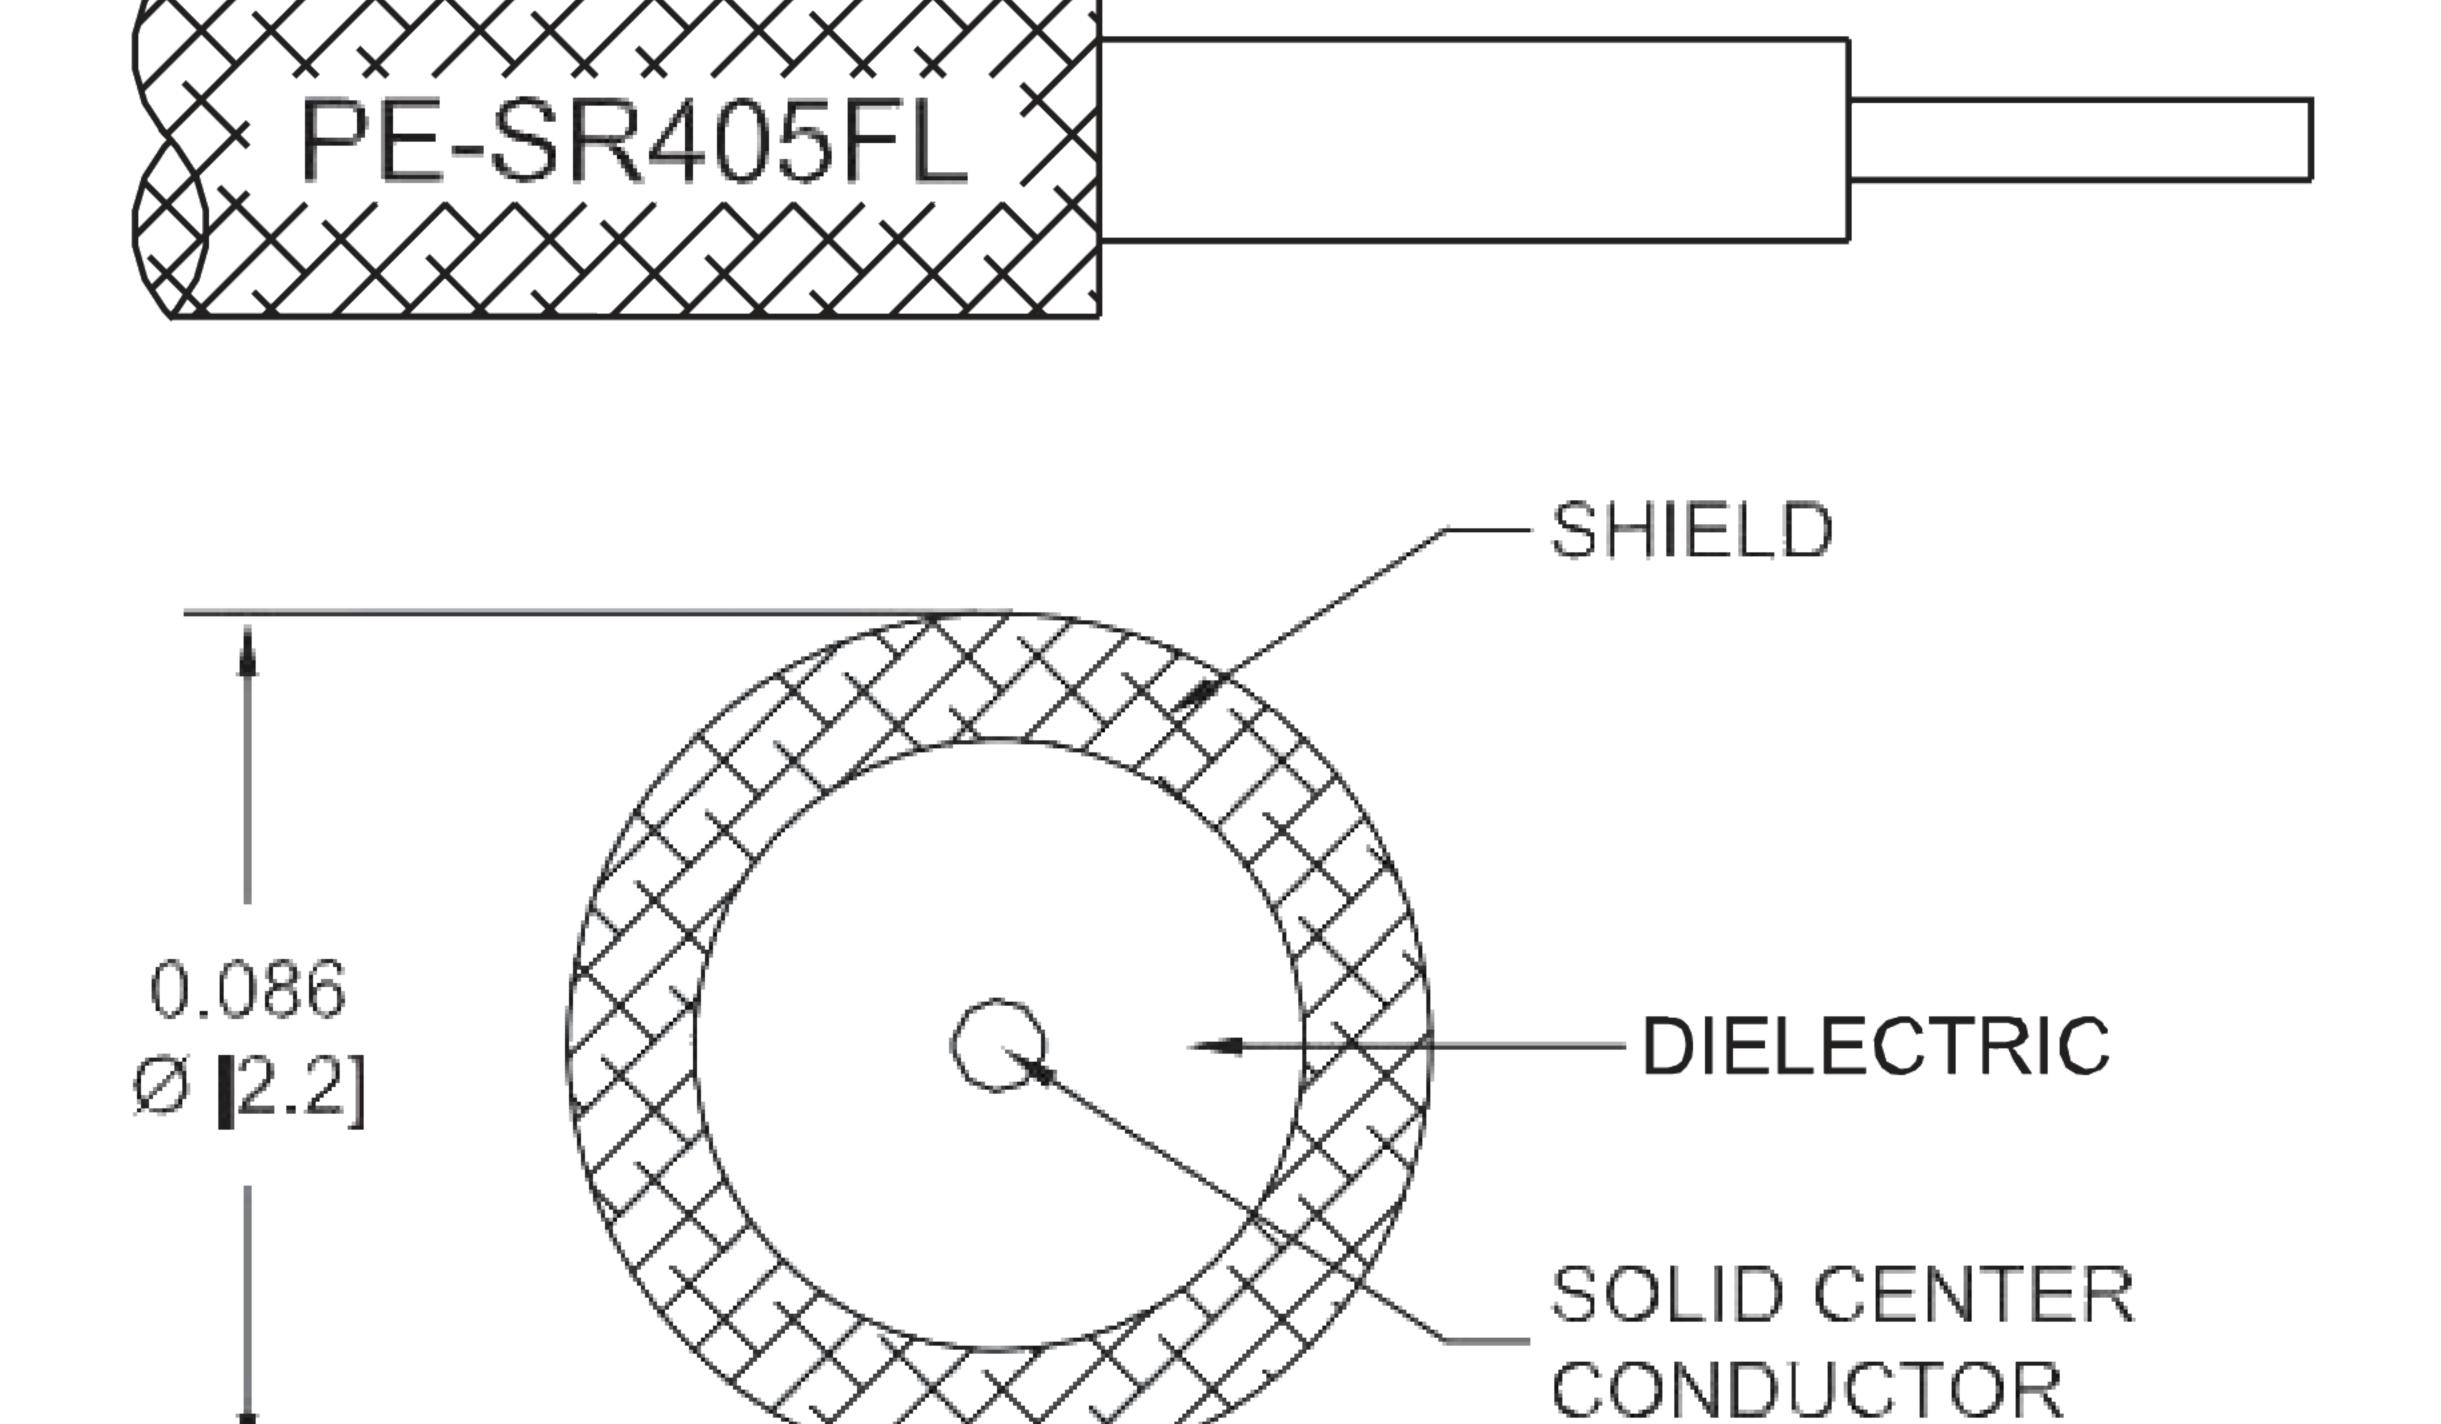

# Applications

General Purpose

Laboratory Use

#### Description

Ebeestock's ET32488 TNC female bulkhead to SMP female right angle 50 cm cable using ET38322 coax is part of our full line of RF components available for same-day shipping. Ebeestock's formable RF cable assemblies provide an alternative to costly pre-formed semi-rigid assemblies since they are hand formable. This Ebeestock TNC to SMP cable assembly has a female to female gender configuration with 50 ohm formable ET38322 coax. The ET32488 TNC female to SMP female cable assembly operates to 6 GHz. The right angle SMP interface on the ET38322 cable allows for easier connections in tight spaces. Our RF cable assembly with TNC bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: TNC Female Bulkhead to SMP Female Right Angle Cable 50 cm Length Using ET38322 Coax ET32488

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.





## RF Cable Assemblies Technical Data Sheet

ET32488

### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.5:1	
Velocity of Propagation		69.5		%
Capacitance		29 [95.14]		pF/ft [pF/m]
DC Resistance Inner Conductor		65.7 [215.55]		Ohms/1000ft [Ohms/
Km]				
DC Resistance Outer Conductor		10.2 [33.46]		Ohms/1000ft [Ohms/
Km]				

#### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.5	1	2	4	6	GHz
Insertion Loss (Max.)	0.55	0.67	1.31	1.53	1.64	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.3dB of connector loss.

## Mechanical Specifications

### Cable Assembly

Length\* 19.68 in [499.87 mm] Diameter 0.795 in [20.19 mm]

### Cable

Cable Type
Impedance
Inner Conductor Type

ET38322

Solid

Inner Conductor Material and Plating Copper Clad Steel, Silver

Dielectric Type

Number of Shields

Outer Conductor Material and Plating Copper, Tin

Repeated Minimum Bend Radius 0.78 in [19.81 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: TNC Female Bulkhead to SMP Female Right Angle Cable 50 cm Length Using ET38322 Coax ET32488

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.





## RF Cable Assemblies Technical Data Sheet

ET32488

#### Connectors

Description	Connector 1	Connector 2		
Type	TNC Female Bulkhead	SMP Female Right Angle		
Specification	MIL-STD-348	MIL-STD-348A		
Impedance	50 Ohms	50 Ohms		
Contact Material and Plating	Phosphor Bronze, Gold	Beryllium Copper, Gold		
Contact Plating Specification	30 µin minimum			
Dielectric Type	PTFE	PTFE		
Body Material and Plating	Brass, Nickel	Beryllium Copper, Gold		

Mechanical Specification Notes:

Compliance Certifications (see product page for current document)

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: TNC Female Bulkhead to SMP Female Right Angle Cable 50 cm Length Using ET38322 Coax ET32488

<sup>\*</sup>All cable assemblies have a length tolerance of 1.5% or ± 3/8", whichever is greater.





## RF Cable Assemblies Technical Data Sheet

ET32488

#### How to Order

Part Number Configuration:

ET3W05541 - xx uu

Unit of Measure:

cm = Centimeters

<br/>
<br/>
<br/>
chlank> = Inches

Base Number

Example: ET3W05541-12 = 12 inches long cable

ET3W05541-100cm = 100 cm long cable

TNC Female Bulkhead to SMP Female Right Angle Cable 50 cm Length Using ET38322 Coax from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: TNC Female Bulkhead to SMP Female Right Angle Cable 50 cm Length Using ET38322 Coax ET32488

**URL:** https://www.ebeestock.com/tnc-female-bulkhead-to-smp-female-right-angle-cable-12-inch-leng th-using-pe-sr405fl-coax-0032483

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.

