

SMA Female 2 Hole Flange to SMP Female Right Angle Cable 150 cm Length Using ET38322J Coax



RF Cable Assemblies Technical Data Sheet

ET32499


Configuration

Connector 1: SMA Female 2 Hole Flange
Connector 2: SMP Female Right Angle

Cable Type: ET38323

Features

- Max Frequency 10 GHz
- Shielding Effectivity > 100 dB
- 69.5% Phase Velocity
- FEP Jacket

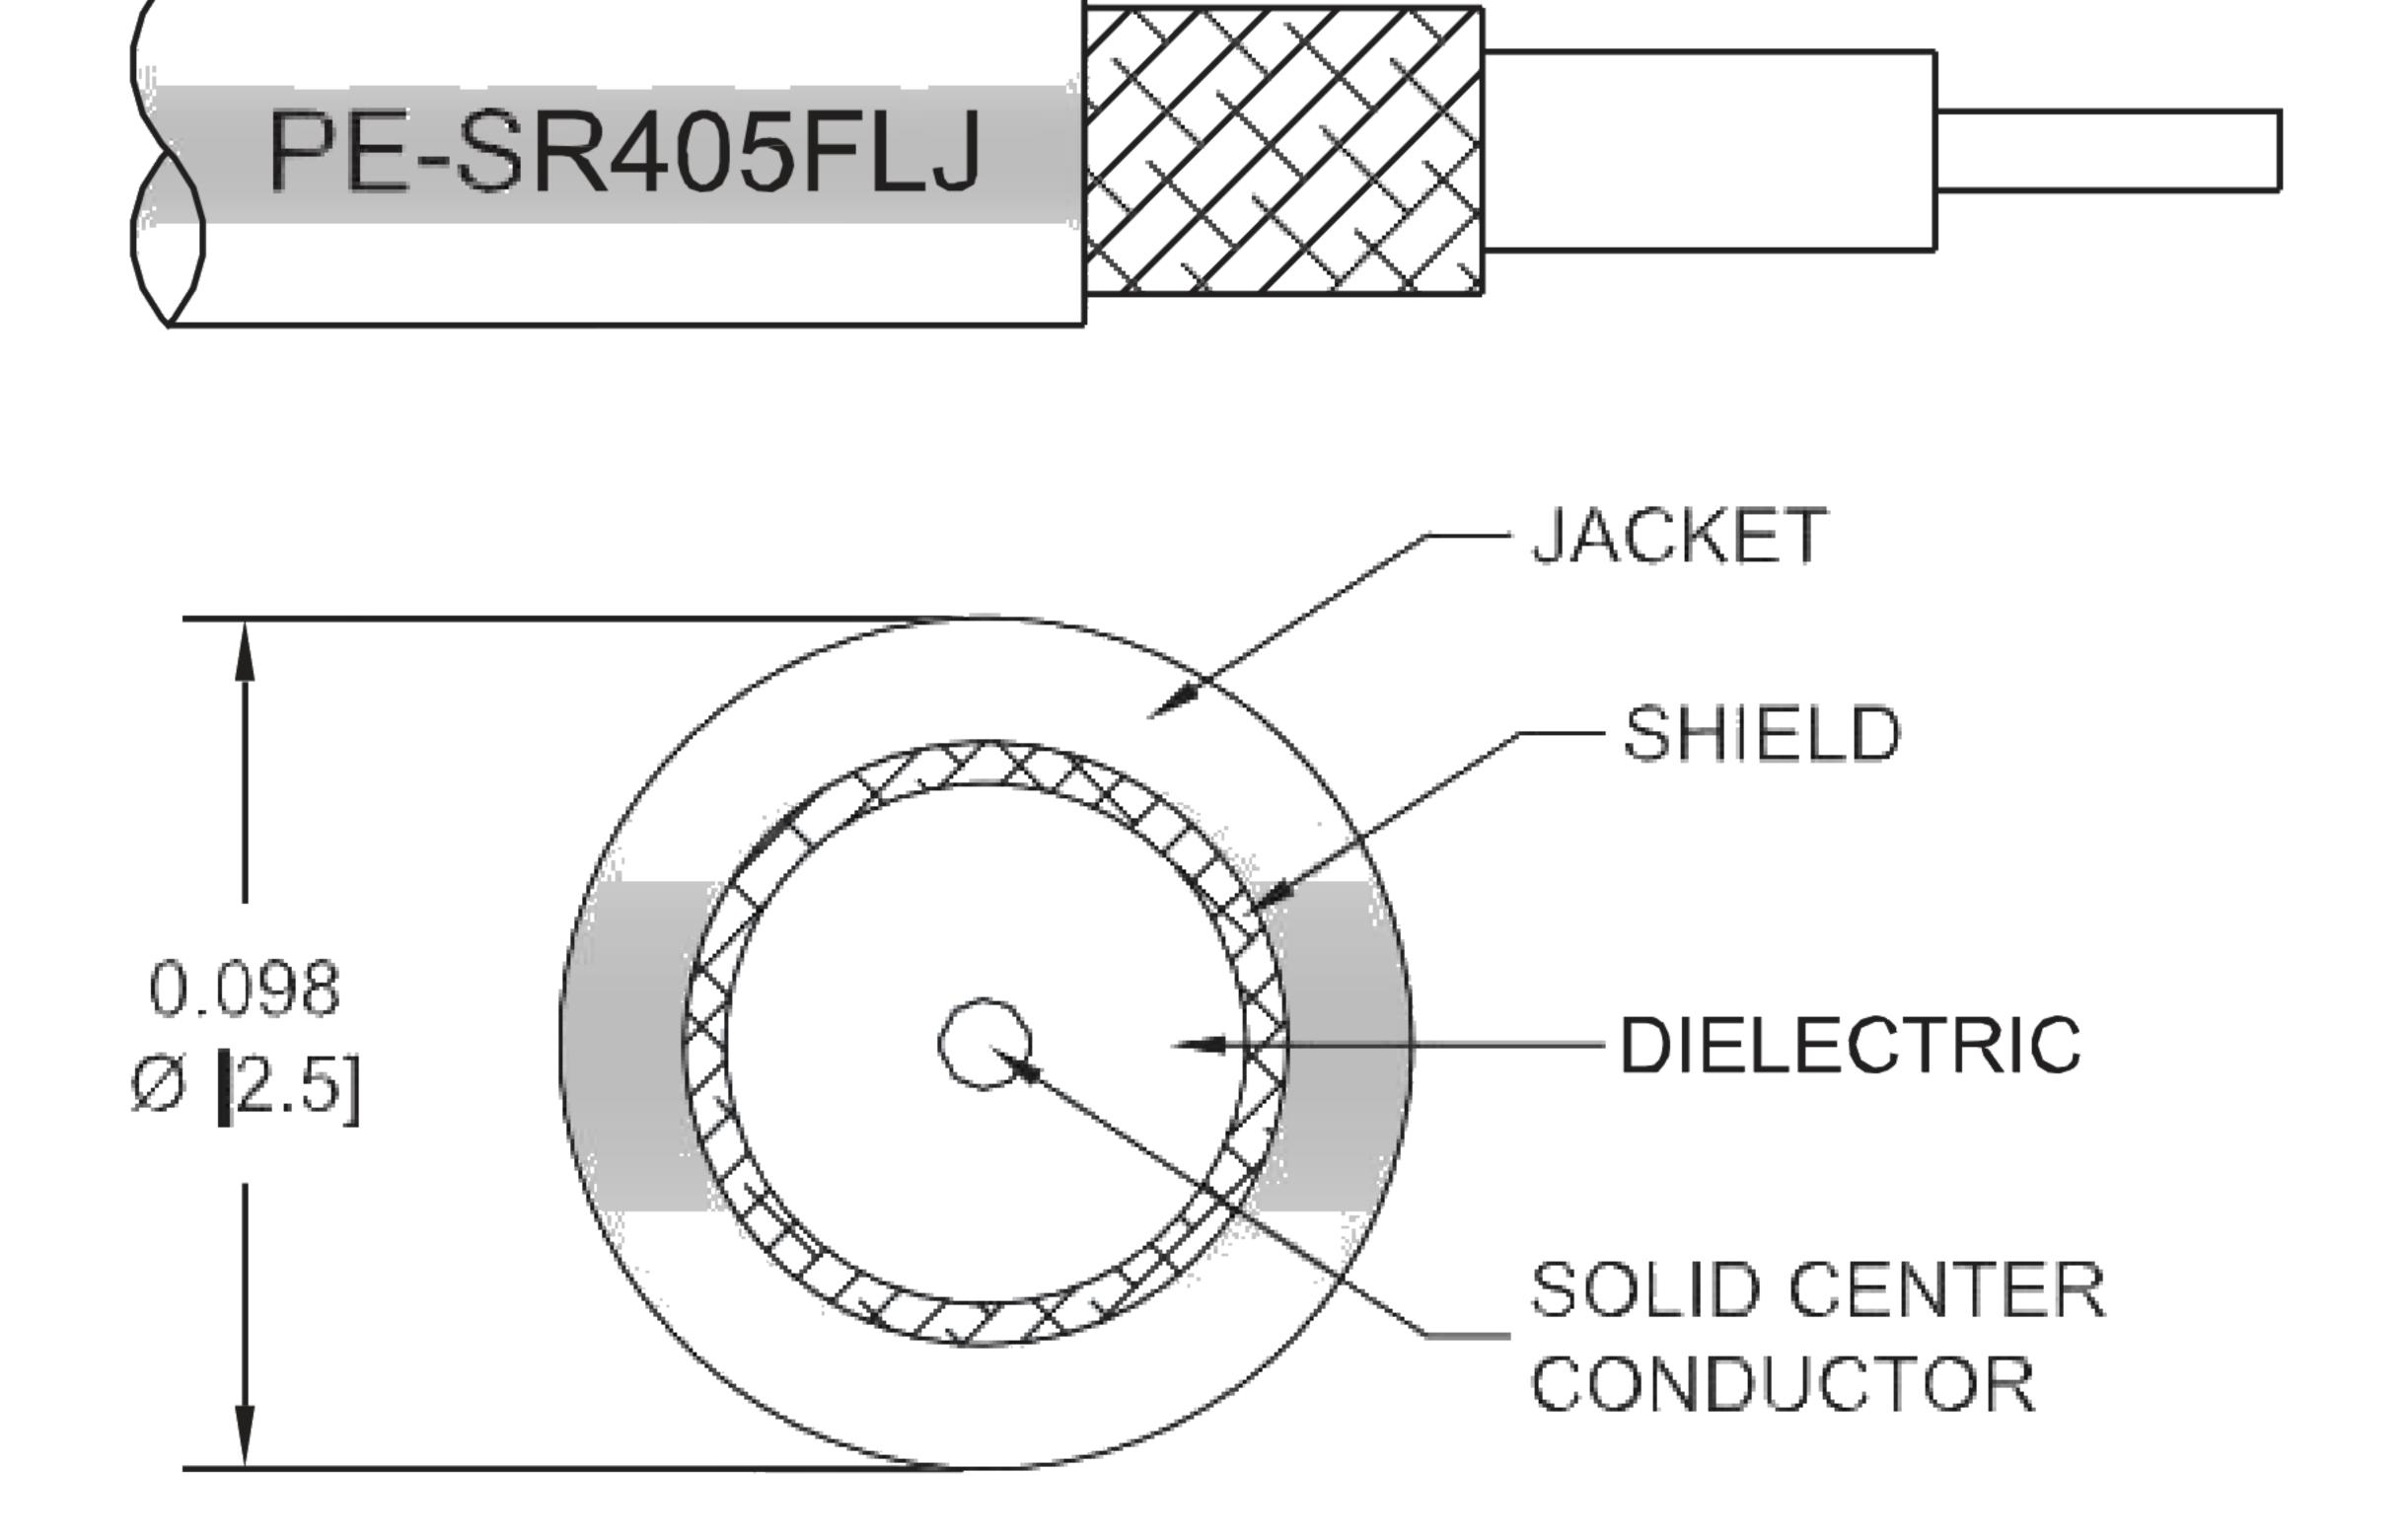

Applications

General Purpose

Laboratory Use

Description

Ebeestock's ET32499 SMA female 2 hole flange to SMP female right angle 150 cm cable using ET38323 coax is part of our full line of RF components available for same-day shipping. Ebeestock's formable RF cable assemblies provide an alternative to costly pre-formed semi-rigid assemblies since they are hand formable. This Ebeestock SMA to SMP cable assembly has a female to female gender configuration with 50 ohm formable ET38323 coax. The ET3W05557- 150CM SMA female to SMP female cable assembly operates to 10 GHz. The right angle SMP interface on the ET38323 cable allows for easier connections in tight spaces. Our RF cable assembly with SMA 2 hole flange interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Female 2 Hole Flange to SMP Female Right Angle Cable 150 cm Length Using ET-SR405FLJ Coax ET32499

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



SMA Female 2 Hole Flange to SMP Female Right Angle Cable 150 cm Length Using ET38322J Coax



RF Cable Assemblies Technical Data Sheet

ET32499

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		10	GHz
VSWR			1.5:1	
Velocity of Propagation		69.5		%
RF Shielding	100			dB
Group Delay		1.43 [4.69]		ns/ft [ns/m]
Capacitance		29 [95.14]		pF/ft [pF/m]
DC Resistance Inner Conductor		65.7 [215.55]		Ohms/1000ft [Ohms/
Km]				
DC Resistance Outer Conductor		10.2 [33.46]		Ohms/1000ft [Ohms/
Km]				

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.5	1	2.5	5	10	GHz
Insertion Loss (Max.)	1.04	1.41	2.01	3.01	4.3	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax use in this assembly. The Insertion Loss includes an estimated insertion loss of 0.3dB of connector Loss

Mechanical Specifications

Cable Assembly

Length* 59.05 in [149.99 cm] 0.25 in [6.35 mm] Diameter

Cable

Cable Type ET38323 Impedance 50 Ohms Inner Conductor Type Solid

Inner Conductor Material and Plating Copper Clad Steel, Silver

Dielectric Type PTFE Number of Shields

Outer Conductor Material and Plating Tinned Copper Composite Braid

Jacket Material FEP, Black 0.105 in [2.67 mm] Jacket Diameter

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Female 2 Hole Flange to SMP Female Right Angle Cable 150 cm Length Using ET-SR405FLJ Coax ET32499

www.ebeestock.com

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen, 523900, Dongguan, Guangdong, China.



SMA Female 2 Hole Flange to SMP Female Right Angle Cable 150 cm Length Using ET38322J Coax



RF Cable Assemblies Technical Data Sheet

ET32499

One Time Minimum Bend Radius Repeated Minimum Bend Radius

0.5 in [12.7 mm] 0.787 in [19.99 mm]

Connectors

Connector 1	Connector 2 SMP Female Right Angle	
SMA Female 2 Hole Flange		
MIL-STD-348	DESC 94008	
50 Ohms	50 Ohms	
Beryllium Copper, Gold	Beryllium Copper, Gold	
MIL-G-45204	MIL-G-45204	
PTFE	PTFE	
Stainless Steel, Gold	Beryllium Copper, Gold	
MIL-G-45204	MIL-G-45204	
	SMA Female 2 Hole Flange MIL-STD-348 50 Ohms Beryllium Copper, Gold MIL-G-45204 PTFE Stainless Steel, Gold	

Mechanical Specification Notes:

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Female 2 Hole Flange to SMP Female Right Angle Cable 150 cm Length Using ET-SR405FLJ Coax ET32499

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.

^{*}All cable assemblies have a length tolerance of 1.5% or ± 3/8", whichever is greater.



SMA Female 2 Hole Flange to SMP Female Right Angle Cable 150 cm Length Using ET38322J Coax



RF Cable Assemblies Technical Data Sheet

ET32499

How to Order

Part Number Configuration:

ET3W05557

- xx

uu

——Unit of Measure:

cm = Centimeters

Length

Base Number

Example: ET3W05557-12 = 12 inches long cable

ET3W05557-100cm = 100 cm long cable

SMA Female 2 Hole Flange to SMP Female Right Angle Cable 150 cm Length Using ET38323 Coax from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Female 2 Hole Flange to SMP Female Right Angle Cable 150 cm Length Using ET-SR405FLJ Coax ET32499

URL: https://www.ebeestock.com/sma-female-2-hole-flange-to-smp-female-right-angle-cable-12-inch -length-using-pe-sr405flj-coax-0032492

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.

