



RF Cable Assemblies Technical Data Sheet


ET32538

Configuration

- Connector 1: SMA Female
- Connector 2: Push-OnSMP Female Right Angle
- Cable Type: ET-LMR-100A

Features

- Max Frequency 3 GHz
- Shielding Effectivity > 90 dB
- 66% Phase Velocity
- Double Shielded
- PVC Jacket

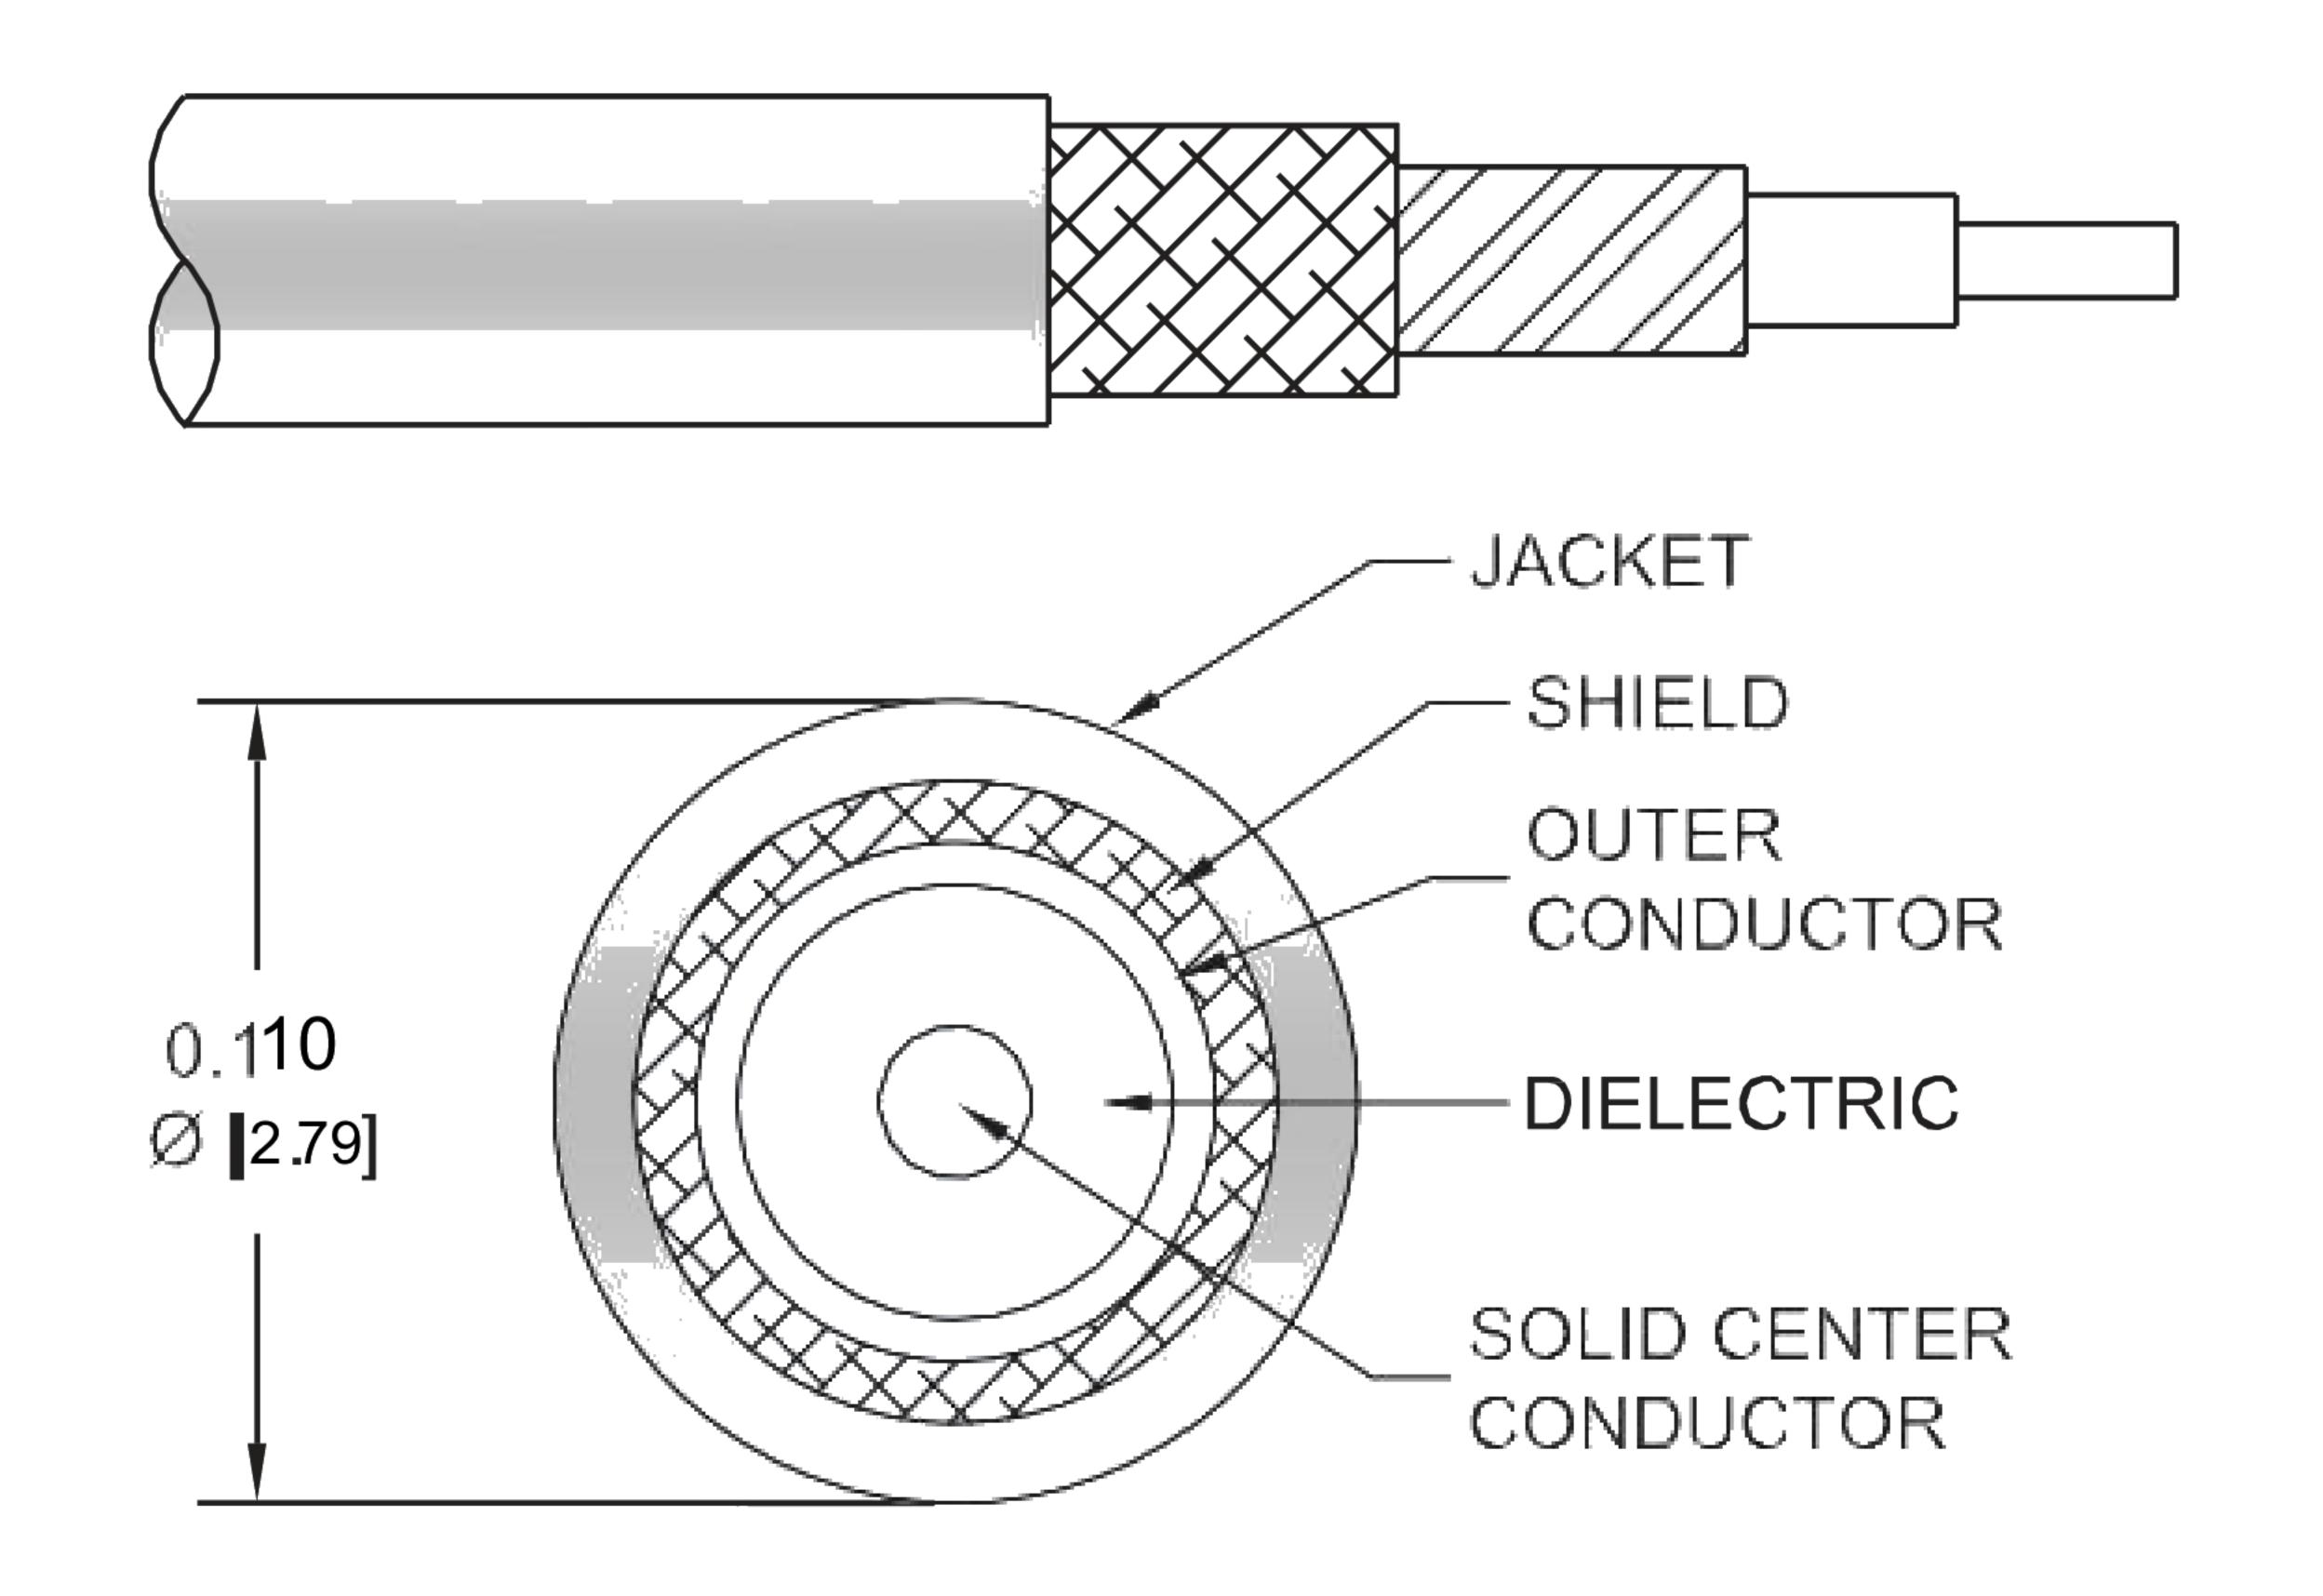

Applications

General Purpose

Laboratory Use

Description

Ebeestock's ET32538 SMA female to SMP female push-on right angle 24 inch cable using ET-LMR-100 coax is part of our full line of RF components available for same-day shipping. Ebeestock's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Ebeestock SMA to SMP cable assembly has a female to female gender configuration with 50 ohm flexible ET-LMR-100A coax. The ET32538 SMA female to SMP female cable assembly operates to 3 GHz. The right angle SMP interface on the ET-LMR-100A cable allows for easier connections in tight spaces. The double shielding of this Ebeestock cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Female to Push-On SMP Female Right Angle Cable 24 Inch Length Using ET-LMR-100 Coax ET32538





RF Cable Assemblies Technical Data Sheet

ET32538

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.4:1	
Velocity of Propagation		66		%
RF Shielding	90			dB
Group Delay		1.54 [5.05]		ns/ft[ns/m]
Capacitance		30.8 [101.05]		pF/ft [pF/m]
Inductance		0.077 [0.25]		uH/ft [uH/m]
DC Resistance Inner Conductor		81 [265.75]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		9.5 [31.17]		Ω/1000ft [Ω/Km]
Operating Voltage (AC)			335	Vrms
Dielectric Withstanding Voltage (DC)			500	Vdc
Jacket Spark			2,000	Vrms
Input Power (Peak)			600	Watts

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	3	GHz
Insertion Loss (Typ.)	0.38	0.48	0.59	0.73	1.12	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax and connectors used in this assembly. The Insertion Loss includes an estimated 0.15 dB for the right angle connector and 0.1 dB for the straight connector.

Mechanical Specifications

Cable Assembly

Length* 24 in [609.6 mm] Diameter 0.25 in [6.35 mm]

Cable

Cable Type ET-LMR-100A Impedance 50 Ohms Inner Conductor Type Solid

Inner Conductor Material and Plating Copper Clad Steel

Dielectric Type

Number of Shields

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Female to Push-On SMP Female Right Angle Cable 24 Inch Length Using ET-LMR-100 Coax ET32538





RF Cable Assemblies Technical Data Sheet

ET32538

Shield Layer 1
Shield Layer 2
Tinned Copper Braid
PVC, Black
Jacket Diameter

Aluminum Tape
Tinned Copper Braid
PVC, Black
0.11 in [2.79 mm]

One Time Minimum Bend Radius

Repeated Minimum Bend Radius

1 in [25.4 mm]

Bending Moment

7 lbs-ft [0.14 N-m]

Flat Plate Crush

Tensile Strength

15 lbs [6.8 Kg]

Connectors

Description	Connector 1	Connector 2 SMP Female Right Angle	
Туре	SMA Female		
Specification	MIL-STD-348A	MIL-STD-348A	
Impedance	50 Ohms	50 Ohms	
Connection Method		Push-On	
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold	
Contact Plating Specification	50μ in. minimum	30μ in. minimum	
Dielectric Type	Teflon	Teflon	
Outer Conductor Material and Plating	Brass, Gold	Beryllium Copper, Gold	
Outer Conductor Plating Specification	3μ in. minimum	3μ in. minimum	
Body Material and Plating	Brass, Gold	Brass, Gold	
Body Plating Specification	3μ in. minimum	3μ in. minimum	

Environmental Specifications

Temperature

Operating Range -40 to +85 deg C Storage Range -70 to +85 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Female to Push-On SMP Female Right Angle Cable 24 Inch Length Using ET-LMR-100 Coax ET32538

www.ebeestock.com





RF Cable Assemblies Technical Data Sheet

ET32538

How to Order

Part Number Configuration:

ET3W10074
- xx uu

Unit of Measure:

cm = Centimeters

chlank> = Inches

Base Number

Example: ET3W10074-12 = 12 inches long cable

ET3W10074-100cm = 100 cm long cable

SMA Female to Push-On SMP Female Right Angle Cable 24 Inch Length Using ET-LMR-100 Coax from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Female to Push-On SMP Female Right Angle Cable 24 Inch Length Using ET-LMR-100 Coax ET32538

URL: https://www.ebeestock.com/sma-female-to-push-on-smp-female-right-angle-cable-12-inch-lengt h-using-lmr-100-coax-0032537

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

