



| COMPONENTS            | IMPEDANCE |
|-----------------------|-----------|
| SSMA MALE RIGHT ANGLE | 50 OHM    |
| SSMA MALE RIGHT ANGLE | 50 OHM    |
| RG316/U               | 50 OHM    |
|                       |           |

| Standard Lengths |                         |
|------------------|-------------------------|
| -12              | 12"                     |
| -24              | 24"                     |
| -36              | 36"                     |
| -48              | 48"                     |
| -60              | 60"                     |
| -XXX             | Custom Length in inches |
|                  |                         |

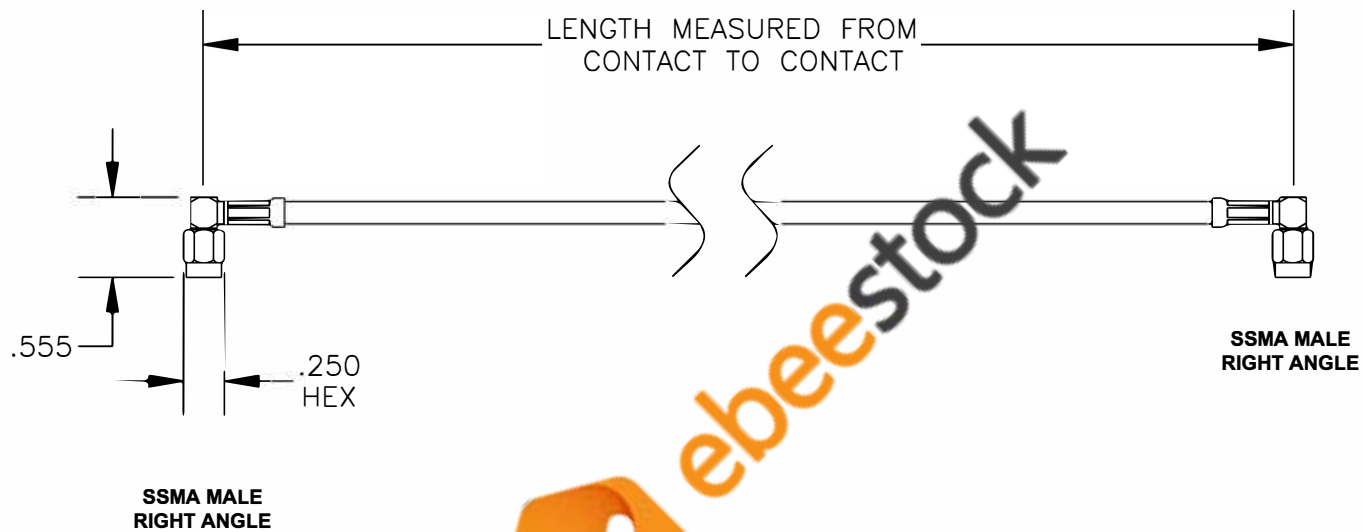

|   |                       |  |                      |
|---|-----------------------|--|----------------------|
| <br><b>ebeestock</b><br>ESTABLISHED 2003 |                       | 8TH FLOOR, BUILDING 1, YONGFU SCIENCE AND TECHNOLOGY<br>CENTER INDUSTRIAL PARK, NANZHA DISTRICT 5,<br>HUMEN, 523900, DONGGUAN, GUANGDONG, CHINA<br>WEBSITE: <a href="http://www.ebeestock.com">www.ebeestock.com</a><br>EMAIL: <a href="mailto:sales@ebeestock.com">sales@ebeestock.com</a><br><b>COAXIAL &amp; FIBER OPTICS</b> |                      |
| DWG TITLE<br><b>ET32669</b>   |                       | DES: <b>CABLE ASSEMBLY, RG316/U, SSMA MALE<br/>         RIGHT ANGLE TO SSMA MALE RIGHT ANGLE</b>   |                      |
| REV. A  | <b>FSCM NO. 53919</b> | CAD FILE 021308  | SCALE N/A SIZE A 147 |

**NOTES:**

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES.
4. LENGTH TOLERANCE IS  $\pm 1.5\%$  OR  $\pm 3/8"$ , WHICHEVER IS GREATER.