


| COMPONENTS | IMPEDANCE |
|------------|-----------|
| SSMA MALE | 50 OHM |
| SMA MALE | 50 OHM |
| RG316/U | 50 OHM |

| Standard Lengths | |
|------------------|-------------------------|
| -12 | 12" |
| -24 | 24" |
| -36 | 36" |
| -48 | 48" |
| -60 | 60" |
| -XXX | Custom Length in inches |

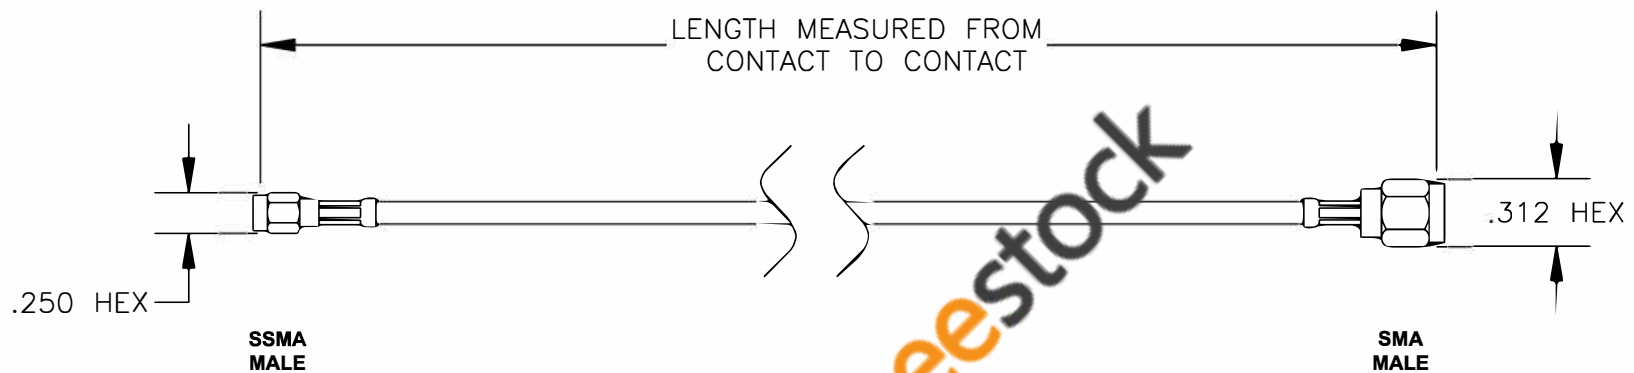


8TH FLOOR, BUILDING 1, YONGFU SCIENCE AND TECHNOLOGY CENTER INDUSTRIAL PARK, NANZHA DISTRICT 5, HUMEN, 523900, DONGGUAN, GUANGDONG, CHINA
 WEBSITE: www.ebeestock.com
 EMAIL: sales@ebeestock.com
 ESTABLISHED 2003 COAXIAL & FIBER OPTICS

| | | | | |
|----------------|----------------|-----------------------------------------------------|-----------|------------|
| DWG TITLE | | DES. CABLE ASSEMBLY, RG316/U, SSMA MALE TO SMA MALE | | |
| ET32739 | | | | |
| REV. A | FSCM NO. 53919 | CAD FILE 021108 | SCALE N/A | SIZE A 127 |

- NOTES:**
- UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 - ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 - DIMENSIONS ARE IN INCHES.
 - LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 3/8"$, WHICHEVER IS GREATER.