


COMPONENTS	IMPEDANCE
SMA MALE	50 OHM
SSMA MALE	50 OHM
RG316-DS	50 OHM

Standard Lengths	
-12	12"
-24	24"
-36	36"
-48	48"
-60	60"
-XXX	Custom Length in inches

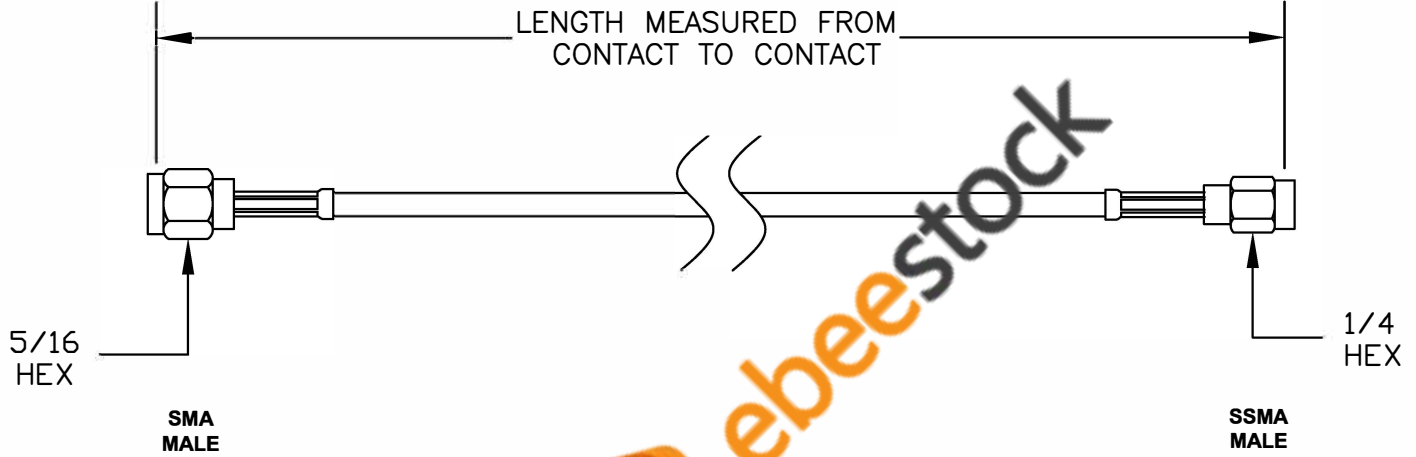

8TH FLOOR, BUILDING 1, YONGFU SCIENCE AND TECHNOLOGY  
CENTER INDUSTRIAL PARK, NANZHA DISTRICT 5,  
HUMEN, 523900, DONGGUAN, GUANGDONG, CHINA

WEBSITE: [www.ebeestock.com](http://www.ebeestock.com)  
EMAIL: [sales@ebeestock.com](mailto:sales@ebeestock.com)

ESTABLISHED 2003

**COAXIAL & FIBER OPTICS**

<b>DWG TITLE</b>	<b>DES.</b>
<b>ET32749</b>	<b>CABLE ASSEMBLY, RG316-DS, SMA MALE TO SSMA MALE</b>
<b>REV. -</b>	<b>FSCM NO. 53919</b>
<b>CAD FILE</b>	<b>082411</b>
<b>SCALE</b>	<b>N/A</b>
<b>SIZE</b>	<b>A</b>
<b>2231</b>	

**NOTES:**

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. LENGTH TOLERANCE IS ± 1.5% OR 10mm, WHICHEVER IS GREATER.