



## SSMC Plug to SSMC Plug Cable 36 Inch Length Using RG178 Coax

### RF Cable Assemblies Technical Data Sheet

**ET32757**

#### Configuration

- Connector 1: SSMC Plug
- Connector 2: SSMC Plug
- Cable Type: RG178

#### Features

- SSMC Cable Assembly Max. Operating Frequency of 3 GHz
- Small SSMC cable connection form factor (50% smaller than SMA, radially)
- Reliable threaded coupling
- In stock and ready to ship

#### Applications

- SSMC Cable General Purpose Test
- Data Acquisition Systems
- A/D Conversion Systems
- Ultra Wideband Digital Receivers
- Software defined radio (SDR)

#### Description

Ebeestock's SSMC cable assemblies are part of our full line of RF components available for same-day shipping. These SSMC cable assemblies are designed to connect SSMC system components and test connections, delivering signal frequencies as high as 12.4 GHz. Our family of SSMC cables can also be used to connect SSMC ports on data acquisition systems, A/D modules or SSMC coax patch panels. If none of our standard options fit your application, you can specify your own custom SSMC cable assembly using Ebeestock's online Cable Creator.

Our SSMC cable assembly datasheet specifications and drawing with dimensions are shown below in this PDF. Ebeestock's broad catalog of RF, microwave and millimeter wave cable assemblies allow designers to configure and customize their signal connections however they like. Whether the need is to provide SSMC cabling for a data acquisition system, or simply create a custom cable assembly configuration, Ebeestock has the right cable assemblies for the job. Ebeestock can also expertly build custom cable assemblies for you and arrange fast shipping.

#### Electrical Specifications

| Description             | Minimum | Typical      | Maximum | Units        |
|-------------------------|---------|--------------|---------|--------------|
| Frequency Range         | DC      |              | 3       | GHz          |
| VSWR                    |         |              | 1.44:1  |              |
| Velocity of Propagation |         | 70           |         | %            |
| Capacitance             |         | 29.4 [96.46] |         | pF/ft [pF/m] |
| Operating Voltage (AC)  |         |              | 250     | Vrms         |



# SSMC Plug to SSMC Plug Cable 36 Inch Length Using RG178 Coax

## RF Cable Assemblies Technical Data Sheet

**ET32757**

### Specifications by Frequency

| Description           | F1   | F2   | F3   | F4   | F5 | Units |
|-----------------------|------|------|------|------|----|-------|
| Frequency             | 0.1  | 0.4  | 1    | 3    |    | GHz   |
| Insertion Loss (Typ.) | 0.62 | 1.04 | 1.54 | 2.56 |    | dB    |

### Mechanical Specifications

#### Cable Assembly

Length\* 36 in [914.4 mm]  
 Diameter 0.156 in [3.96 mm]

#### Cable

Cable Type RG178  
 Impedance 50 Ohms  
 Inner Conductor Type Stranded  
 Inner Conductor Material and Plating Copper Clad Steel, Silver  
 Dielectric Type PTFE  
 Number of Shields 1  
 Shield Layer 1 Silver Plated Copper Braid  
 Jacket Material FEP, Tan  
 Jacket Diameter 0.072 in [1.83 mm]  
 Repeated Minimum Bend Radius 0.4 in [10.16 mm]

#### Connectors

| Description                        | Connector 1            | Connector 2            |
|------------------------------------|------------------------|------------------------|
| Type                               | SSMC Plug              | SSMC Plug              |
| Impedance                          | 50 Ohms                | 50 Ohms                |
| Mating Cycles                      | 500                    | 500                    |
| Contact Material and Plating       | Beryllium Copper, Gold | Beryllium Copper, Gold |
| Contact Plating Specification      | MIL-G-45204            | MIL-G-45204            |
| Dielectric Type                    | Teflon                 | Teflon                 |
| Body Material and Plating          | Beryllium Copper, Gold | Beryllium Copper, Gold |
| Body Plating Specification         | MIL-G-45204            | MIL-G-45204            |
| Coupling Nut Material and Plating  | Beryllium Copper, Gold | Beryllium Copper, Gold |
| Coupling Nut Plating Specification | MIL-G-45205            | MIL-G-45205            |
| Torque                             | 1.75 in-lbs [0.2 Nm]   | 1.75 in-lbs [0.2 Nm]   |



## SSMC Plug to SSMC Plug Cable 36 Inch Length Using RG178 Coax

### RF Cable Assemblies Technical Data Sheet

**ET32757****Mechanical Specification Notes:**

\*All cable assemblies have a length tolerance of 1.5% or  $\pm 3/8"$ , whichever is greater.

**Environmental Specifications****Temperature**


Operating Range

-55 to +165 deg C

**Compliance Certifications** (see [product page](#) for current document)**Plotted and Other Data****ebeestock**

# ET32757 CAD Drawing


SSMC Plug to SSMC Plug Cable 36 Inch Length Using RG178 Coax

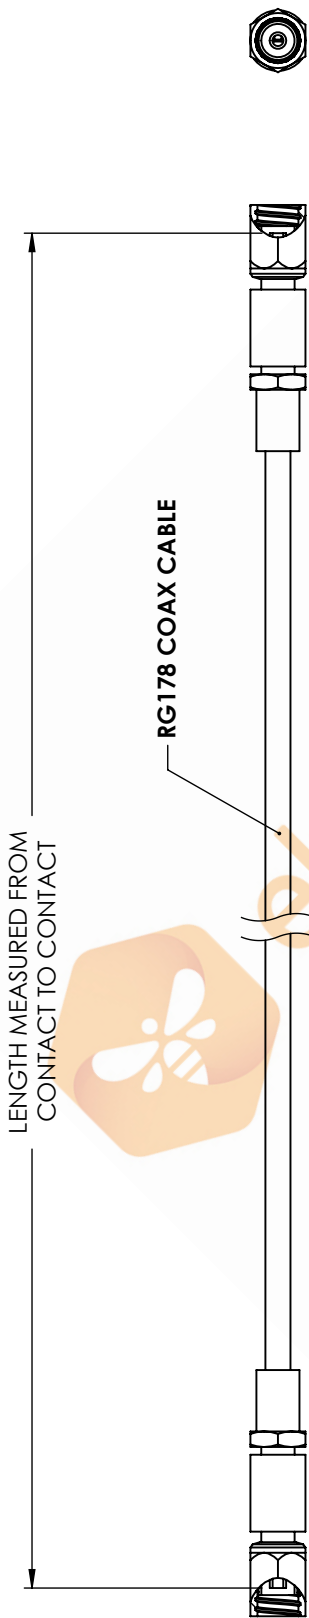

STANDARD TOLERANCES

- .X ±0.2
- .XX ±0.01
- .XXX ±0.005

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES



**ebeestock**  
 8TH FLOOR, BUILDING 1,  
 YONGFU SCIENCE AND TECHNOLOGY  
 CENTER INDUSTRIAL PARK, NANZHA DISTRICT  
 5, HUMEN, 523900, DONGGUAN, GUANGDONG, CHINA  
 WEBSITE: [www.ebeestock.com](http://www.ebeestock.com)  
 EMAIL: [sales@ebeestock.com](mailto:sales@ebeestock.com)

DWG TITLE

ET32757

CAGE CODE 53919

CAD FILE 08/31/17

SCALE N/A

SIZE A

CN2245

NOTES:  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME  
 3. DIMENSIONS ARE IN INCHES [mm].