



| COMPONENTS | IMPEDANCE |
|------------|-----------|
| TNC MALE | 50 OHM |
| TNC MALE | 50 OHM |
| RG303/U | 50 OHM |
| | |

| Standard Lengths | |
|------------------|-------------------------|
| -12 | 12" |
| -24 | 24" |
| -36 | 36" |
| -48 | 48" |
| -60 | 60" |
| -XXX | Custom Length in inches |
| | |

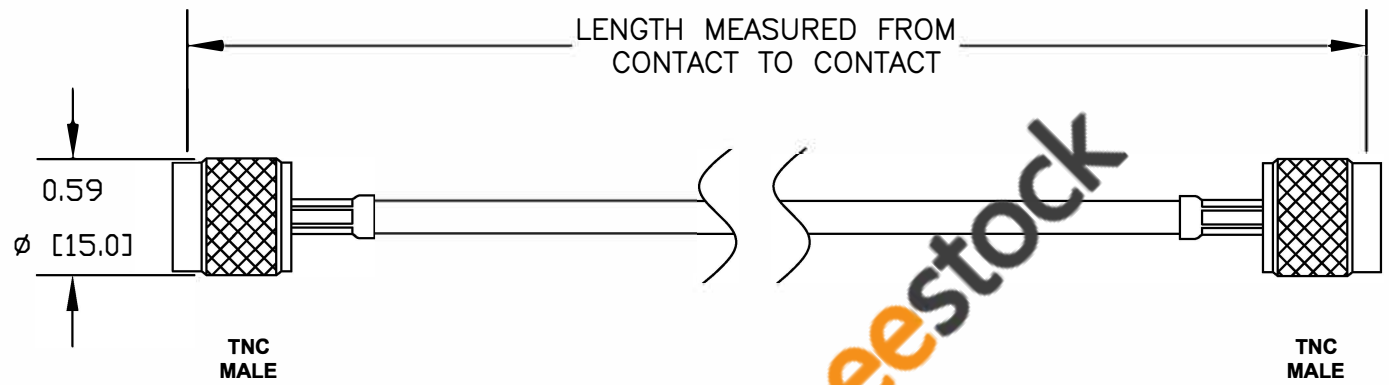

| | | | | | |
|---|----------------|---|-----------|--------|------|
|  <p>8TH FLOOR, BUILDING 1, YONGFU SCIENCE AND TECHNOLOGY CENTER INDUSTRIAL PARK, NANZHA DISTRICT 5, HUMEN, 523900, DONGGUAN, GUANGDONG, CHINA</p> <p>WEBSITE: www.ebeestock.com EMAIL: sales@ebeestock.com</p> <p>ESTABLISHED 2003</p> | | <p>COAXIAL & FIBER OPTICS</p> | | | |
| <p>DWG TITLE ET33105</p> | | <p>DES. CABLE ASSEMBLY, RG303/U, TNC MALE TO TNC MALE</p> | | | |
| REV. - | FSCM NO. 53919 | CAD FILE 071211 | SCALE N/A | SIZE A | 2231 |
| <p>NOTES:</p> <ol style="list-style-type: none"> UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. DIMENSIONS ARE IN INCHES [mm]. LENGTH TOLERANCE IS ± 1.5% OR 10mm, WHICHEVER IS GREATER. | | | | | |