


TNC Male Right Angle to TNC Male Right Angle Cable 150 cm Length Using RG316-DS Coax

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	8/25/2020	S. ELLIS

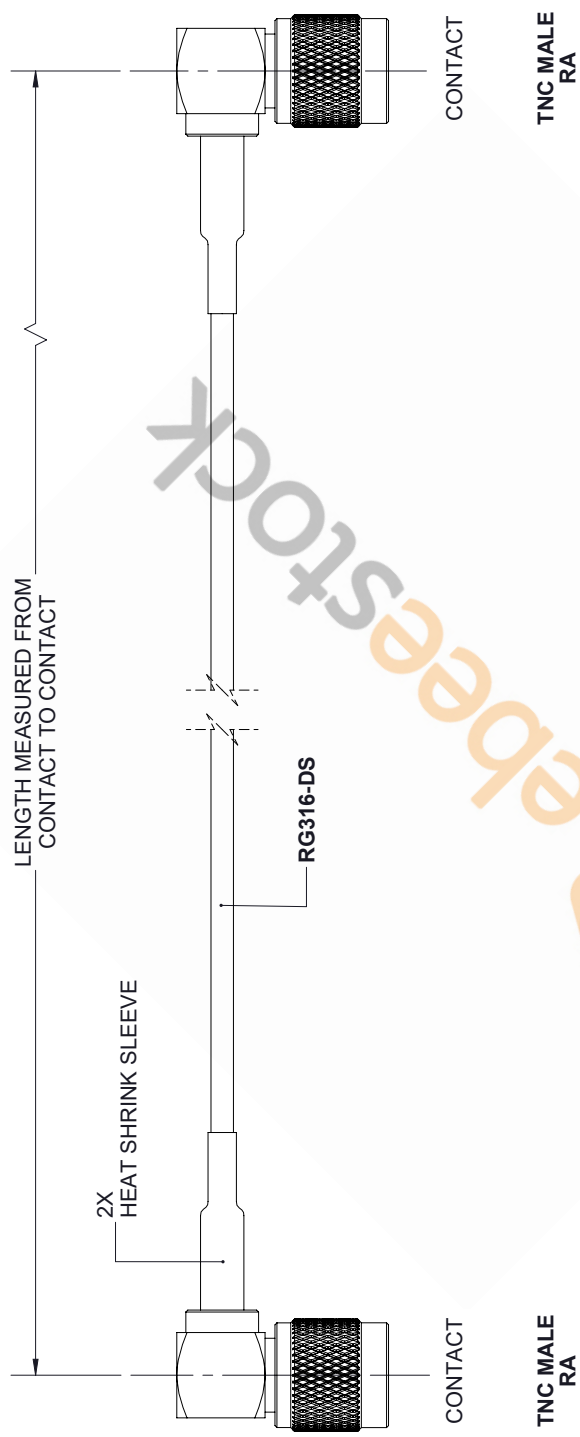

UNLESS OTHERWISE SPECIFIED  
LEADING DIMENSIONS ARE INCHES  
DIMENSIONS IN [ ] ARE MILLIMETERS

TOLERANCES:  
 .X = ±.2 [ .08 ]    FRACTIONS ± 1/32  
 .XX = ±.02 [ .51 ]    ANGLES ± 1°  
 .XXX = ±.005 [ .13 ]

CABLE LENGTH (L) TOLERANCES:  
 L ≤ 12 [ 305 ] = +1 [ 25 ] / -0  
 12 [ 305 ] < L ≤ 60 [ 1524 ] = +2 [ 51 ] / -0  
 60 [ 1524 ] < L ≤ 120 [ 3048 ] = +4 [ 102 ] / -0  
 120 [ 3048 ] < L ≤ 300 [ 7620 ] = +6 [ 152 ] / -0  
 300 [ 7620 ] < L = +5%L / -0


ALL DIMENSIONS SHOWN  
ARE FOR REFERENCE ONLY.



**8TH FLOOR, BUILDING 1,  
YONGFU SCIENCE AND TECHNOLOGY  
CENTER INDUSTRIAL PARK, NANZHA DISTRICT  
5, HUMEN, 523000, DONGGUAN, GUANGDONG, CHINA**

WEBSITE: [www.ebeestock.com](http://www.ebeestock.com)  
EMAIL: [sales@ebeestock.com](mailto:sales@ebeestock.com)

THIRD-ANGLE PROJECTION



THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERWACK CORPORATION. ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE N/A

REV A

ITEM NO ET33309

CAGE CODE DRAWN BY K. DANG