



COMPONENTS	IMPEDANCE
REVERSE POLARITY TNC MALE	50 OHM
STANDARD SMA MALE	50 OHM
RG316/U	50 OHM

Standard Lengths	
-12	12"
-24	24"
-36	36"
-48	48"
-60	60"
-XXX	Custom Length in inches

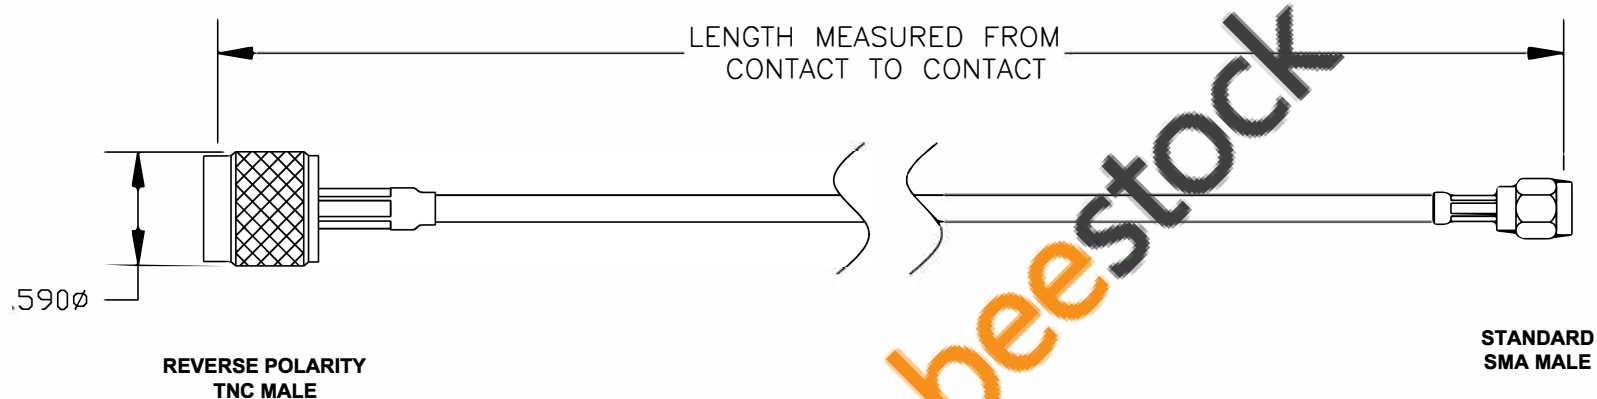

 <b>8TH FLOOR, BUILDING 1, YONGFU SCIENCE AND TECHNOLOGY CENTER INDUSTRIAL PARK, NANZHA DISTRICT 5, HUMEN, 523900, DONGGUAN, GUANGDONG, CHINA</b>	
<b>ebeestock</b> ESTABLISHED 2003	
WEBSITE: <a href="http://www.ebeestock.com">www.ebeestock.com</a> EMAIL: <a href="mailto:sales@ebeestock.com">sales@ebeestock.com</a> <b>COAXIAL &amp; FIBER OPTICS</b>	
DWG TITLE	<b>ET34203</b> DES. CABLE ASSEMBLY, RG316/U, REVERSE POLARITY TNC MALE TO STANDARD SMA MALE
REV. A	<b>FSCM NO. 53919</b>
CAD FILE	013008
SCALE	N/A
SIZE	A 147

- NOTES:
- UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
  - ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
  - DIMENSIONS ARE IN INCHES.
  - LENGTH TOLERANCE IS  $\pm 1.5\%$  OR  $\pm 3/8"$ , WHICHEVER IS GREATER.