



| COMPONENTS                | IMPEDANCE |
|---------------------------|-----------|
| REVERSE POLARITY TNC MALE | 50 OHM    |
| STANDARD TNC MALE         | 50 OHM    |
| RG223/U                   | 50 OHM    |
|                           |           |

| Standard Lengths |                         |
|------------------|-------------------------|
| -12              | 12"                     |
| -24              | 24"                     |
| -36              | 36"                     |
| -48              | 48"                     |
| -60              | 60"                     |
| -XXX             | Custom Length in inches |
|                  |                         |



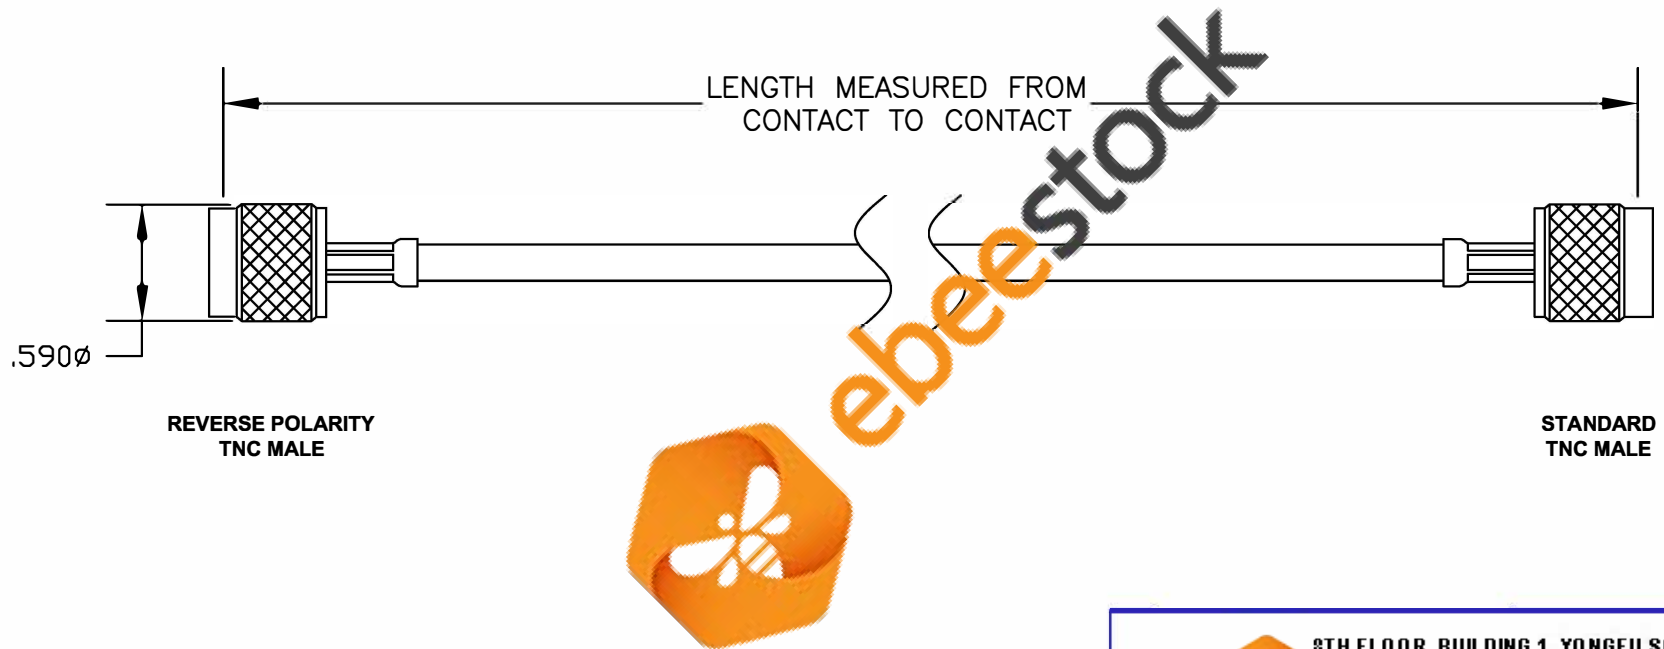

8TH FLOOR, BUILDING 1, YONGFU SCIENCE AND TECHNOLOGY CENTER INDUSTRIAL PARK, NANZHA DISTRICT 5, HUMEN, 523900, DONGGUAN, GUANGDONG, CHINA

**ebeestock**  
ESTABLISHED 2003

WEBSITE: [www.ebeestock.com](http://www.ebeestock.com)  
EMAIL: [sales@ebeestock.com](mailto:sales@ebeestock.com)  
COAXIAL & FIBER OPTICS

|  |                |   |           |
|--|----------------|---|-----------|
| DWG TITLE  |                | DES.  |           |
| <b>ET34515</b>   |                | CABLE ASSEMBLY, RG223/U, REVERSE POLARITY TNC MALE TO STANDARD TNC MALE |           |
| SIZE A   | FSCM NO. 53919 | CAD FILE 022207   | SCALE N/A |
| NOTES:<br>1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.<br>2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.<br>3. DIMENSIONS ARE IN INCHES.<br>4. LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 3/8"$ , WHICHEVER IS GREATER. |                |   |           |