



| COMPONENTS | IMPEDANCE |
|------------|-----------|
| SMA MALE   | 50 OHM    |
| SMA MALE   | 50 OHM    |
| RG214/U    | 50 OHM    |

| Standard Lengths |                         |
|------------------|-------------------------|
| -12              | 12"                     |
| -24              | 24"                     |
| -36              | 36"                     |
| -48              | 48"                     |
| -60              | 60"                     |
| -XXX             | Custom Length in inches |

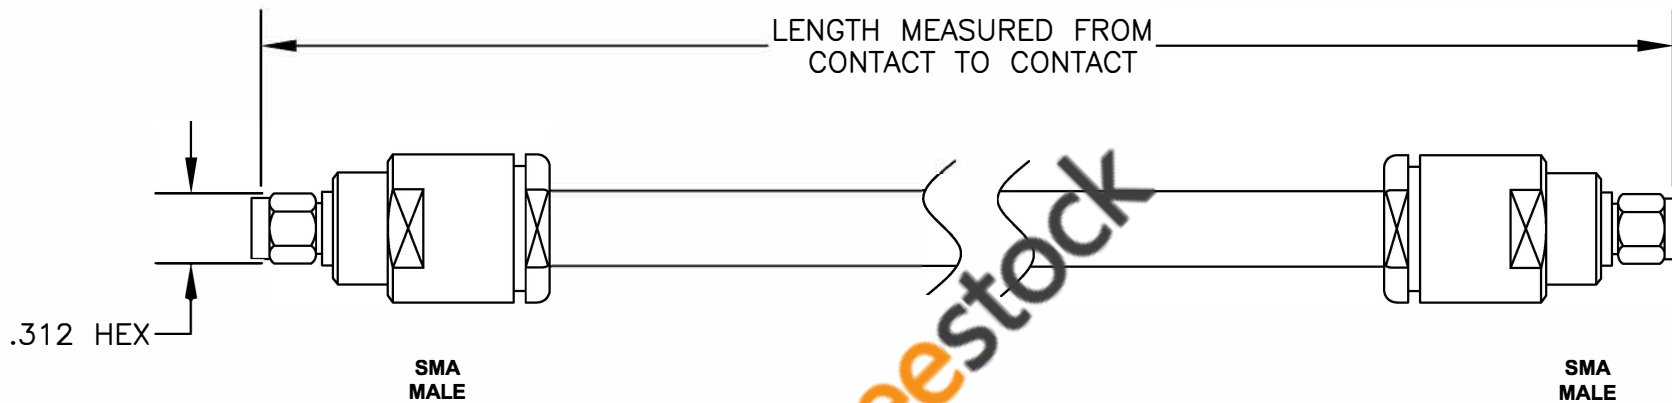

|  |  |                 |           |     |
|--|--|-----------------|-----------|-----|
|  <p>8TH FLOOR, BUILDING 1, YONGFU SCIENCE AND TECHNOLOGY<br/>CENTER INDUSTRIAL PARK, NANZHA DISTRICT 5,<br/>HUMEN, 523900, DONGGUAN, GUANGDONG, CHINA</p> <p>WEBSITE: <a href="http://www.ebeestock.com">www.ebeestock.com</a><br/>EMAIL: <a href="mailto:sales@ebeestock.com">sales@ebeestock.com</a><br/>COAXIAL &amp; FIBER OPTICS</p> <p>ESTABLISHED 2003</p> |  |                 |           |     |
| DWG TITLE  | DES.   |                 |           |     |
| ET35167  | CABLE ASSEMBLY, RG214/U, SMA MALE<br>TO SMA MALE (LEAD FREE) |                 |           |     |
| SIZE A   | FSCM NO. 53919   | CAD FILE 022908 | SCALE N/A | 127 |
| <b>NOTES:</b><br>1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.<br>2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.<br>3. DIMENSIONS ARE IN INCHES.<br>4. LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 3/8"$ , WHICHEVER IS GREATER.  |  |                 |           |     |