



| COMPONENTS | IMPEDANCE |
|------------|-----------|
| SMA MALE   | 50 OHM    |
| SMA MALE   | 50 OHM    |
| RG214/U    | 50 OHM    |

| Standard Lengths |                         |
|------------------|-------------------------|
| -12              | 12"                     |
| -24              | 24"                     |
| -36              | 36"                     |
| -48              | 48"                     |
| -60              | 60"                     |
| -XXX             | Custom Length in inches |

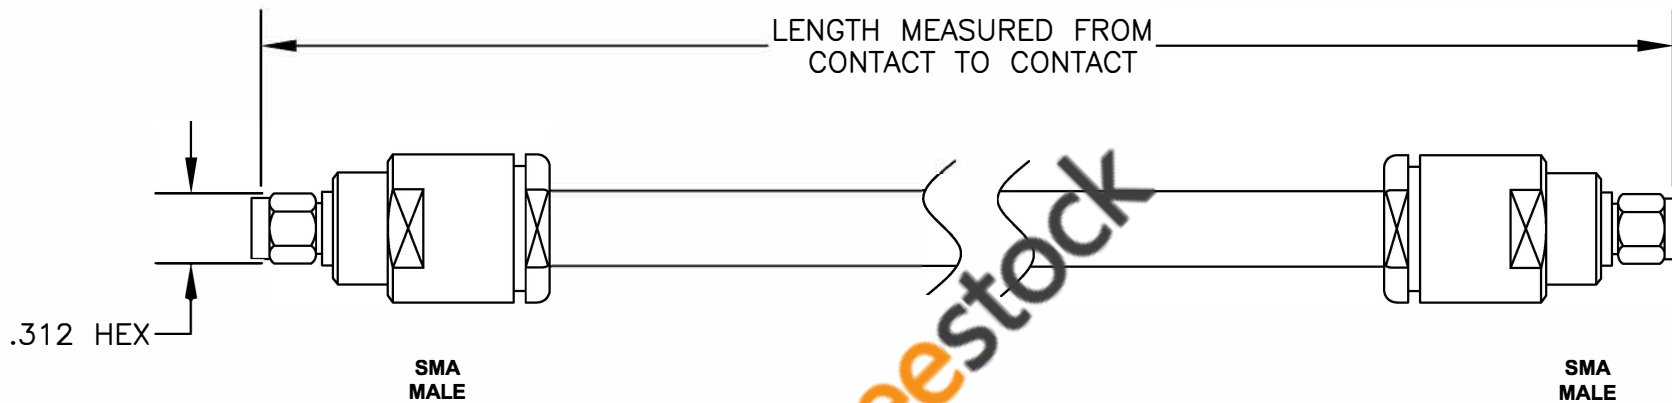

|   |                |  |           |     |
|---|----------------|--|-----------|-----|
|  <b>8TH FLOOR, BUILDING 1, YONGFU SCIENCE AND TECHNOLOGY CENTER INDUSTRIAL PARK, NANZHA DISTRICT 5, HUMEN, 523900, DONGGUAN, GUANGDONG, CHINA</b><br>WEBSITE: <a href="http://www.ebeestock.com">www.ebeestock.com</a><br>EMAIL: <a href="mailto:sales@ebeestock.com">sales@ebeestock.com</a><br><b>COAXIAL &amp; FIBER OPTICS</b><br>ESTABLISHED 2003 |                |  |           |     |
| DWG TITLE<br><h1 style="color: blue;">ET35168</h1>  |                | DES. CABLE ASSEMBLY, RG214/U, SMA MALE TO SMA MALE (LEAD FREE) |           |     |
| SIZE A  | FSCM NO. 53919 | CAD FILE 022908  | SCALE N/A | 127 |

- NOTES:**
- UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
  - ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
  - DIMENSIONS ARE IN INCHES.
  - LENGTH TOLERANCE IS  $\pm 1.5\%$  OR  $\pm 3/8"$ , WHICHEVER IS GREATER.