



COMPONENTS	IMPEDANCE
SMA MALE	50 OHM
SMA FEMALE	50 OHM
RG316-DS	50 OHM

Standard Lengths	
-12	12"
-24	24"
-36	36"
-48	48"
-60	60"
-XXX	Custom Length in inches

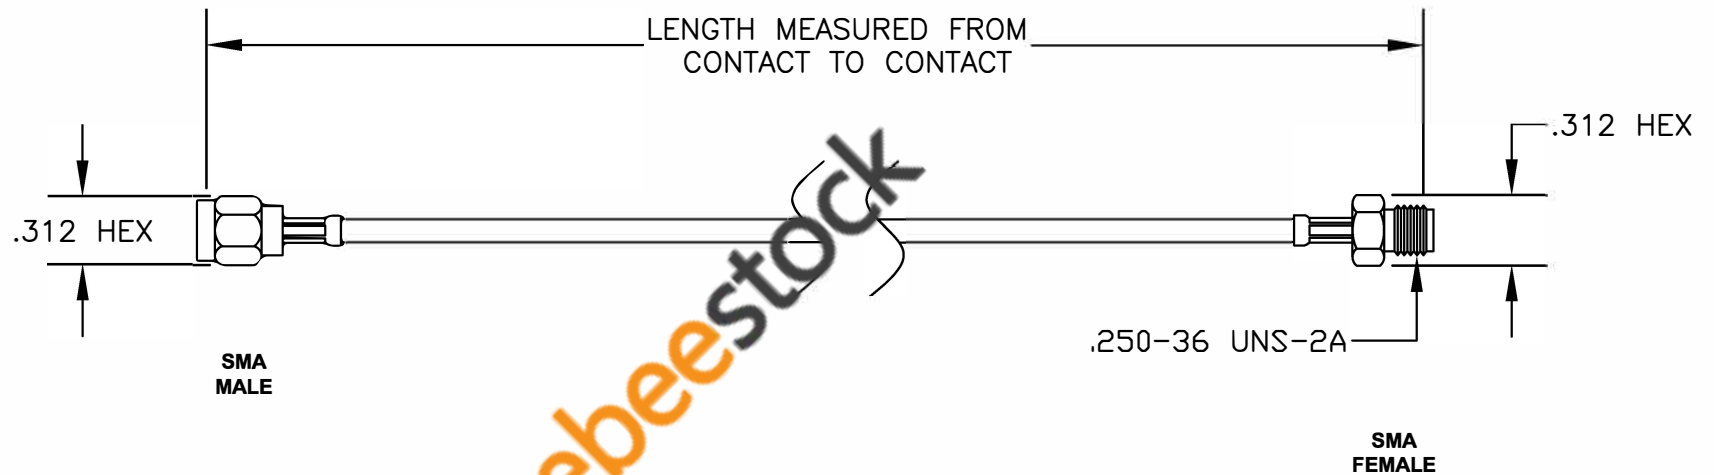

 <b>8TH FLOOR, BUILDING 1, YONGFU SCIENCE AND TECHNOLOGY CENTER INDUSTRIAL PARK, NANZHA DISTRICT 5, HUMEN, 523900, DONGGUAN, GUANGDONG, CHINA</b>	
<b>ebeestock</b> ESTABLISHED 2003	
WEBSITE: <a href="http://www.ebeestock.com">www.ebeestock.com</a> EMAIL: <a href="mailto:sales@ebeestock.com">sales@ebeestock.com</a> <b>COAXIAL &amp; FIBER OPTICS</b>	
DWG TITLE	DES.
<b>ET35296</b>	CABLE ASSEMBLY, RG316-DS, SMA MALE TO SMA FEMALE (LEAD FREE)
SIZE A	FSCM NO. 53919
CAD FILE	042309
SCALE	N/A
	127

- NOTES:**
- UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
  - ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
  - DIMENSIONS ARE IN INCHES.
  - LENGTH TOLERANCE IS  $\pm 1.5\%$  OR  $\pm 3/8"$ , WHICHEVER IS GREATER.