



COMPONENTS	IMPEDANCE
SMA MALE	50 OHM
SMA FEMALE	50 OHM
RG316-DS	50 OHM

Standard Lengths	
-12	12"
-24	24"
-36	36"
-48	48"
-60	60"
-XXX	Custom Length in inches

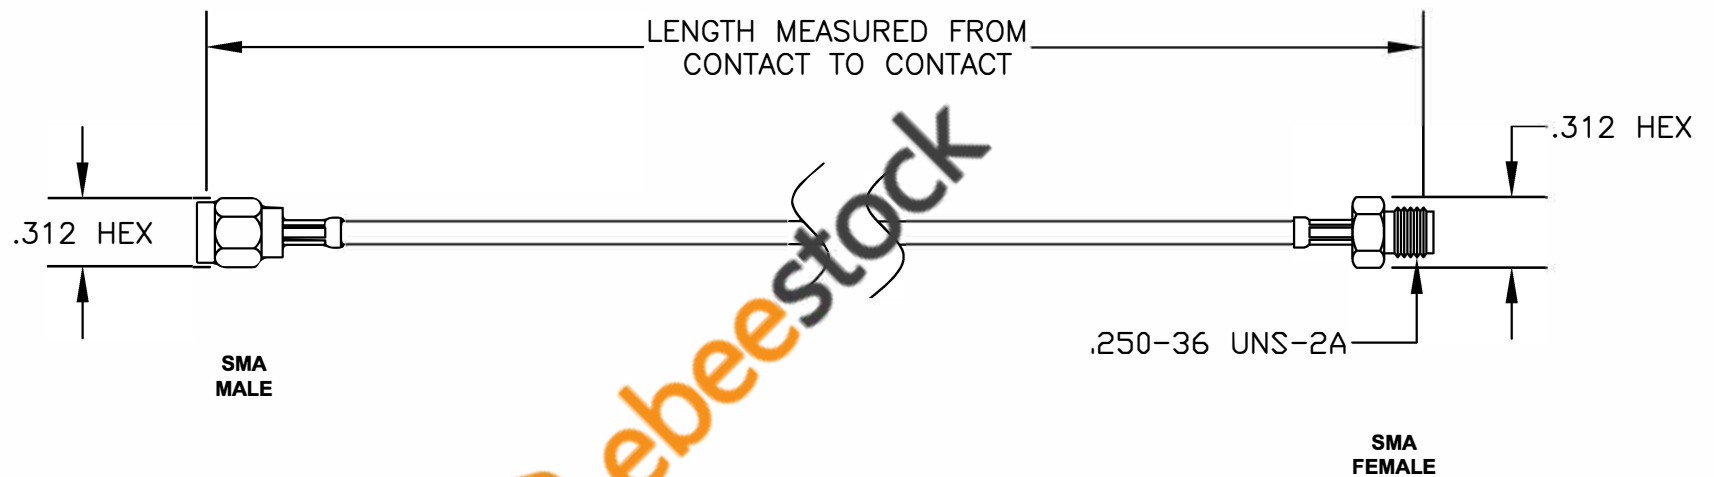

 <p>8TH FLOOR, BUILDING 1, YONGFU SCIENCE AND TECHNOLOGY CENTER INDUSTRIAL PARK, NANZHA DISTRICT 5, HUMEN, 523900, DONGGUAN, GUANGDONG, CHINA</p> <p><b>ebeestock</b> ESTABLISHED 2003</p>		<p>WEBSITE: <a href="http://www.ebeestock.com">www.ebeestock.com</a> EMAIL: <a href="mailto:sales@ebeestock.com">sales@ebeestock.com</a> COAXIAL &amp; FIBER OPTICS</p>	
DWG TITLE		DES.	
<b>ET35302</b>		CABLE ASSEMBLY, RG316-DS, SMA MALE TO SMA FEMALE (LEAD FREE)	
SIZE A	FSCM NO. 53919	CAD FILE	042309
		SCALE	N/A
			127
<p><b>NOTES:</b></p> <ol style="list-style-type: none"> <li>UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.</li> <li>ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.</li> <li>DIMENSIONS ARE IN INCHES.</li> <li>LENGTH TOLERANCE IS <math>\pm 1.5\%</math> OR <math>\pm 3/8"</math>, WHICHEVER IS GREATER.</li> </ol>			