


| COMPONENTS | IMPEDANCE |
|-------------------------------|-----------|
| SMA FEMALE 4 HOLE PANEL MOUNT | 50 OHM |
| SMA FEMALE 4 HOLE PANEL MOUNT | 50 OHM |
| RG402/U | 50 OHM |

| Standard Lengths | |
|------------------|-------------------------|
| -12 | 12" |
| -24 | 24" |
| -36 | 36" |
| -48 | 48" |
| -60 | 60" |
| -XXX | Custom Length in inches |

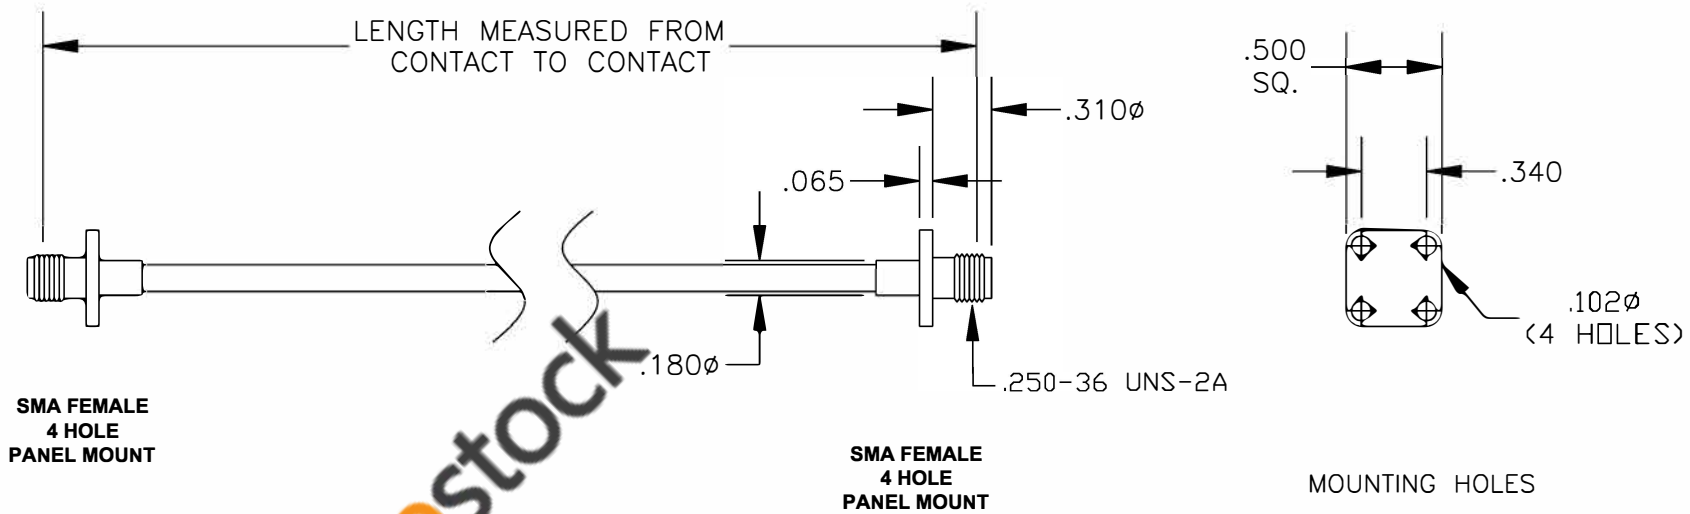


8TH FLOOR, BUILDING 1, YONGFU SCIENCE AND TECHNOLOGY CENTER INDUSTRIAL PARK, NANZHA DISTRICT 5, HUMEN, 523900, DONGGUAN, GUANGDONG, CHINA
 WEBSITE: www.ebeestock.com
 EMAIL: sales@ebeestock.com
COAXIAL & FIBER OPTICS
 ESTABLISHED 2003

| | | | |
|-----------|----------------|------|---|
| DWG TITLE | ET35694 | DES. | CABLE ASSEMBLY, RG402/U, SMA FEMALE 4 HOLE PANEL MOUNT TO SMA FEMALE 4 HOLE PANEL MOUNT |
|-----------|----------------|------|---|

| | | | | | | | |
|--------|-----------------------|----------|--------|-------|-----|------|-------|
| REV. A | FSCM NO. 53919 | CAD FILE | 012408 | SCALE | N/A | SIZE | A 147 |
|--------|-----------------------|----------|--------|-------|-----|------|-------|

- NOTES:**
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES.
 4. LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 3/8"$, WHICHEVER IS GREATER.