


| COMPONENTS | IMPEDANCE |
|----------------------|-----------|
| SMA MALE | 50 OHM |
| SMA MALE RIGHT ANGLE | 50 OHM |
| RG62A/U | 93 OHM |
| | |

| Standard Lengths | |
|------------------|-------------------------|
| -12 | 12" |
| -24 | 24" |
| -36 | 36" |
| -48 | 48" |
| -60 | 60" |
| -XXX | Custom Length in inches |
| | |

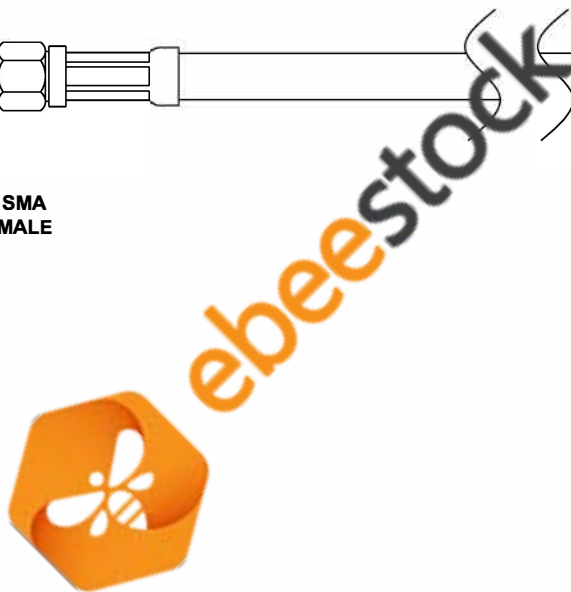


8TH FLOOR, BUILDING 1, YONGFU SCIENCE AND TECHNOLOGY CENTER INDUSTRIAL PARK, NANZHA DISTRICT 5, HUMEN, 523900, DONGGUAN, GUANGDONG, CHINA
 WEBSITE: www.ebeeStock.com
 EMAIL: sales@ebeeStock.com
COAXIAL & FIBER OPTICS
 ESTABLISHED 2003

| | | | |
|-----------|----------------|------|---|
| DWG TITLE | ET36099 | DES. | CABLE ASSEMBLY, RG62A/U, SMA MALE TO SMA MALE RIGHT ANGLE |
|-----------|----------------|------|---|

| | | | | | | | | |
|--------|-----------------------|----------|--------|-------|-----|------|---|-----|
| REV. A | FSCM NO. 53919 | CAD FILE | 021308 | SCALE | N/A | SIZE | A | 147 |
|--------|-----------------------|----------|--------|-------|-----|------|---|-----|

- NOTES:**
- UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 - ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 - DIMENSIONS ARE IN INCHES.
 - LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 3/8"$, WHICHEVER IS GREATER.