



| COMPONENTS | IMPEDANCE |
|----------------------|-----------|
| SMA MALE | 50 OHM |
| SMA MALE RIGHT ANGLE | 50 OHM |
| RG178B/U | 50 OHM |
| | |

| Standard Lengths | |
|------------------|-------------------------|
| -12 | 12" |
| -24 | 24" |
| -36 | 36" |
| -48 | 48" |
| -60 | 60" |
| -XXX | Custom Length in inches |
| | |

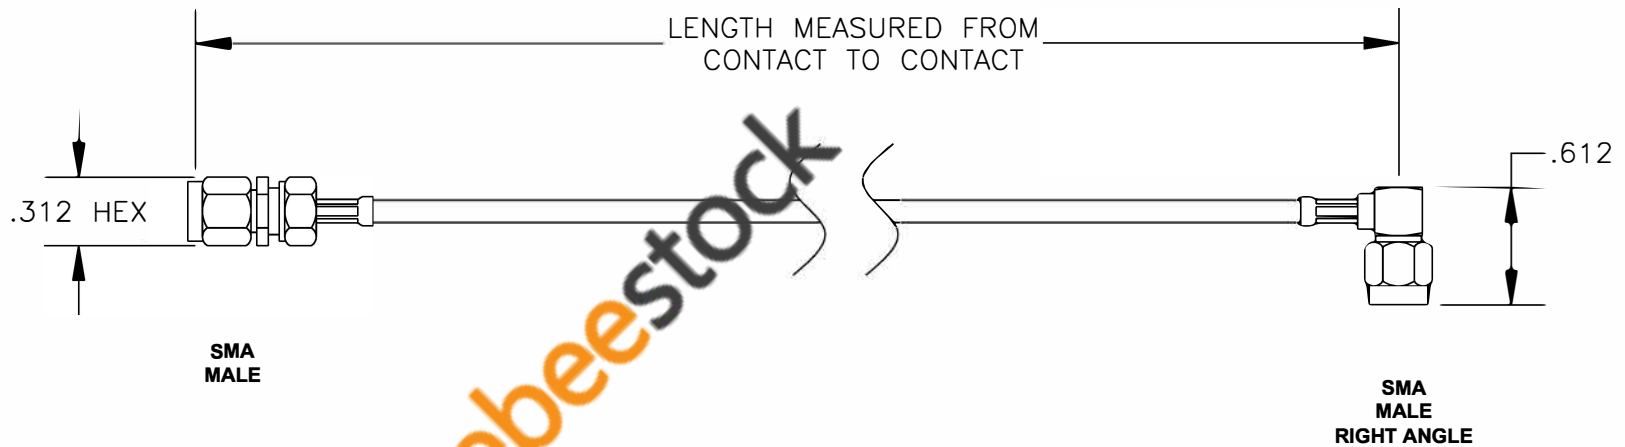

| | | | | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------|-----------------|-----------|------------|
|  <p>8TH FLOOR, BUILDING 1, YONGFU SCIENCE AND TECHNOLOGY CENTER INDUSTRIAL PARK, NANZHA DISTRICT 5, HUMEN, 523900, DONGGUAN, GUANGDONG, CHINA</p> <p>WEBSITE: www.ebeestock.com EMAIL: sales@ebeestock.com</p> <p>ESTABLISHED 2003</p> <p style="text-align: right;">COAXIAL & FIBER OPTICS</p> | | | | |
| DWG TITLE | DES. | | | |
| ET36355 | CABLE ASSEMBLY, RG178B/U, SMA MALE TO SMA MALE RIGHT ANGLE (LEAD FREE) | | | |
| REV. A | FSCM NO. 53919 | CAD FILE 120708 | SCALE N/A | SIZE A 127 |

- NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES.
 4. LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 3/8"$, WHICHEVER IS GREATER.