



| COMPONENTS | IMPEDANCE |
|------------|-----------|
| SMA MALE   | 50 OHM    |
| SMA FEMALE | 50 OHM    |
|            |           |
|            |           |

| Standard Lengths |                         |
|------------------|-------------------------|
| -12              | 12"                     |
| -24              | 24"                     |
| -36              | 36"                     |
| -48              | 48"                     |
| -60              | 60"                     |
| -XXX             | Custom Length in inches |
|                  |                         |

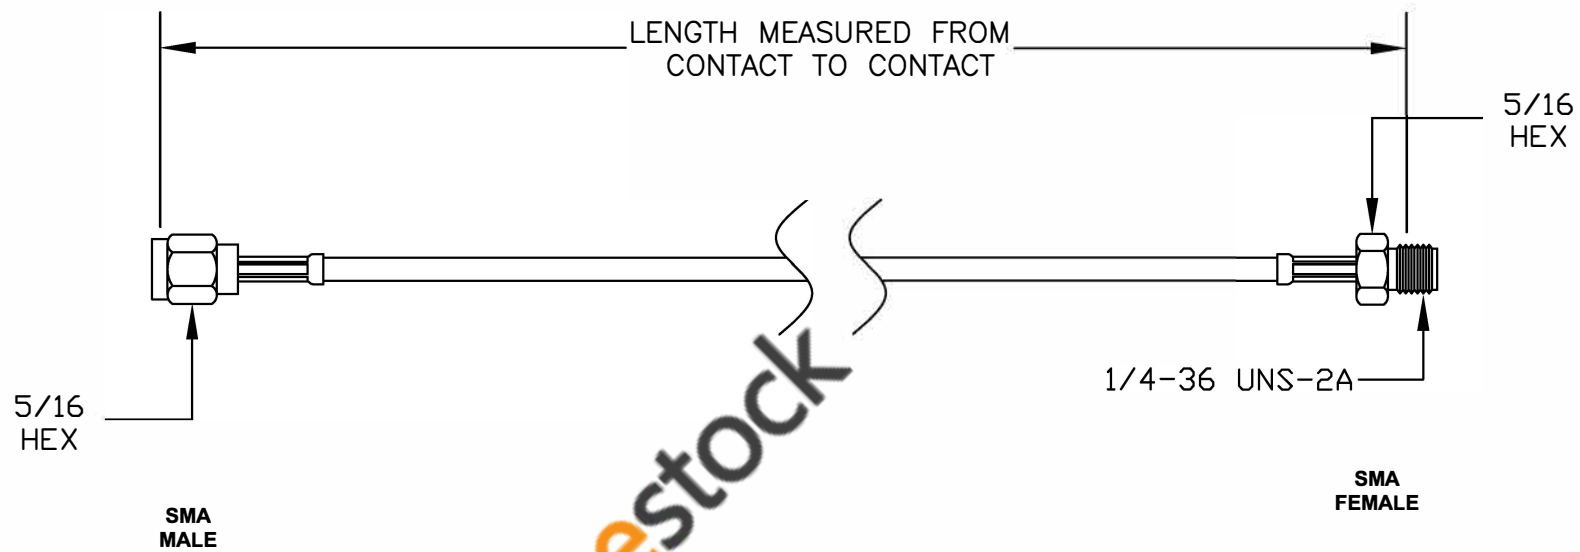

|  |                |   |  |        |      |
|--|----------------|---|--|--------|------|
|   |                | 8TH FLOOR, BUILDING 1, YONGFU SCIENCE AND TECHNOLOGY CENTER INDUSTRIAL PARK, NANZHA DISTRICT 5, HUMEN, 523900, DONGGUAN, GUANGDONG, CHINA |  |        |      |
| <b>ebeestock</b>   |                | WEBSITE: <a href="http://www.ebeestock.com">www.ebeestock.com</a><br>EMAIL: <a href="mailto:sales@ebeestock.com">sales@ebeestock.com</a>  |  |        |      |
| ET36558  |                |   | DES. CABLE ASSEMBLY, PE-C100, SMA MALE TO SMA FEMALE |        |      |
| REV. -   | FSCM NO. 53919 | CAD FILE 082411   | SCALE N/A  | SIZE A | 2231 |
| <b>NOTES:</b><br>1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.<br>2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.<br>3. DIMENSIONS ARE IN INCHES [mm].<br>4. LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 3/8"$ , WHICHEVER IS GREATER. |                |   |  |        |      |