




| COMPONENTS | IMPEDANCE |
|------------|-----------|
| SMA MALE | 50 OHM |
| SMA FEMALE | 50 OHM |
| | |
| | |

| Standard Lengths | |
|------------------|-------------------------|
| -12 | 12" |
| -24 | 24" |
| -36 | 36" |
| -48 | 48" |
| -60 | 60" |
| -XXX | Custom Length in inches |
| | |

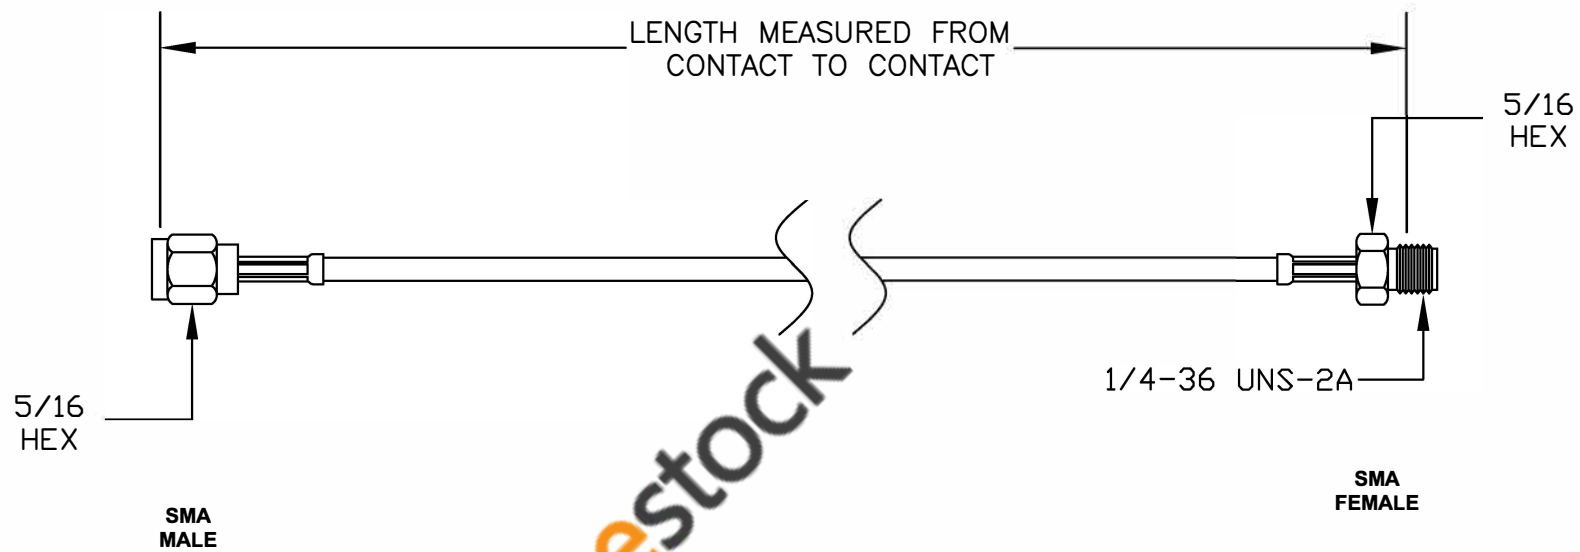

| | | | | | |
|--|----------------|---|--|--------|------|
|  | | 8TH FLOOR, BUILDING 1, YONGFU SCIENCE AND TECHNOLOGY CENTER INDUSTRIAL PARK, NANZHA DISTRICT 5, HUMEN, 523900, DONGGUAN, GUANGDONG, CHINA | | | |
|  | | WEBSITE: www.ebeestock.com EMAIL: sales@ebeestock.com | | | |
| ET36559 | | | DES. CABLE ASSEMBLY, PE-C100, SMA MALE TO SMA FEMALE | | |
| REV. - | FSCM NO. 53919 | CAD FILE 082411 | SCALE N/A | SIZE A | 2231 |
| NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm]. 4. LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 3/8"$, WHICHEVER IS GREATER. | | | | | |